

10250-54

6/15/2004

1/3

Center panel 76600

OLYMPIC HI 76600

ANTIFOULING

Red 51110

| | |
|---------------------------------------------------------------------------|----------|
| ACTIVE INGREDIENT: | |
| Cuprous oxide* | 48.79 % |
| OTHER INGREDIENTS | |
| Total | 51.21 % |
| | 100.00 % |
| *Metallic copper equivalent, 43.07 % by weight | |
| Contains petroleum distillates, xylene or xylene range aromatic solvents. | |

Keep out of reach of children

DANGER

FIRST AID

- **IF IN EYES:**
 - Hold eye open and rinse slowly and gently with water for 15-20 minutes.
 - Remove contact lenses, if present, after the first 5 minutes, then continue rinsing.
 - Call a poison control center or doctor for treatment advice.
- **IF ON SKIN:**
 - Take off contaminated clothing.
 - Rinse skin immediately with plenty of water for 15 – 20 minutes.
- **IF SWALLOWED:**
 - Call a poison control center or doctor immediately for treatment advice.
 - Have a person sip a glass of water if able to swallow.
 - Do not induce vomiting unless told to do so by a poison control center or doctor.
 - Do not give anything to an unconscious person.
- **IF INHALED:**
 - Remove victim to fresh air. Get medical attention.

NOTE TO PHYSICIAN:

- Probable mucosal damage may contraindicate the use of gastric lavage.
- Contains petroleum distillate. Vomiting may cause aspiration pneumonia.


Have the product container or label with you when calling a poison control center or doctor, or going for treatment.

SEE SIDE PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS

FOR USE IN COMMERCIAL OR NAVY SHIPYARDS ONLY. NOT FOR SALE FOR USE OR STORAGE BY PRIVATE APPLICATORS OR MARINA PERSONNEL. NOT FOR USE ON STATIONARY STRUCTURES.

MADE IN USA - Sold by: HEMPEL (USA) INC. Conroe, Texas 77303

EPA Est. No. 10250-TX001 EPA Reg. No.: 10250-54

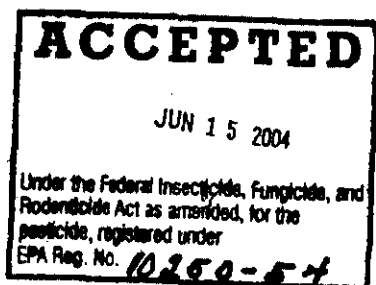

Reserved for Bar Code and symbols not part of label language

Left Panel 76600

HEMPEL'S

PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS AND DOMESTIC ANIMALS
DANGER !

Corrosive. Causes eye damage and skin irritation. Wear goggles or face shield, rubber gloves, and other protective clothing such as long sleeved shirt, long pants and hat. Product may be fatal if swallowed. Harmful if inhaled or absorbed through the skin. Product may be a dermal sensitizer. Do not get in eyes. Avoid contact with skin, eyes, or clothing. Avoid breathing vapor, mist, dust or chips from sanding. Wash thoroughly with soap and water after handling and before eating or smoking. Use adequate ventilation. While spraying paint or sanding boat surface, wear a respirator jointly approved by the Mining Enforcement and Safety Administration and the National Institute for Occupational Safety and Health.

ENVIRONMENTAL HAZARDS


This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

PHYSICAL CHEMICAL HAZARDS: Flammable

Keep container closed. Use with adequate ventilation. Store in a cool, dry place away from heat, sunlight and open flame. Close container tightly after use. Do not use near heat or open flame.

WARRANTY

This labeling must be in the possession of the user at the time of pesticide application. While all HEMPEL products are developed and manufactured with the utmost care, we offer these products with the express understanding that the user will determine the suitability for his intended use and assume all risk and liability in connection therewith. If the product is used other than directed hereon we expressly disclaim any responsibility for its use, handling, storage, result obtained, injury or indirect or consequential damages of any nature whatsoever caused. THERE ARE NO IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE FOR THIS PRODUCT. Hempel's only obligation shall be to replace such quantity of product found to be defective.

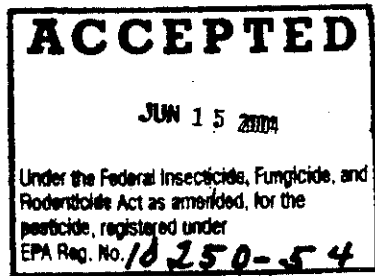

Right Panel 76600

HEMPEL'S ANTIFOULING OLYMPIC HI 76600 is an advanced antifouling paint containing cuprous oxide for the prevention of barnacles, algae, coral, and other sessile marine fouling organisms. Recommended for the underwater surfaces of steel vessels operated in all coastal and oceanic waters.

DIRECTIONS FOR USE:

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

APPLICATION INSTRUCTIONS:

Stir thoroughly and apply to a clean dry surface with a temperature above the dew point. Apply over previous coating (examples: primer, sealer, antifouling paint) or according to the written painting specifications developed for the particular vessel. Film thickness (measured by a film thickness gauge) and the number of coats required to be applied depend upon vessel hull conditions, trading pattern, and designed extensions of painted surface service life. Allow at least 10 hours dry time between coats of this product at 20C / 68F. Drying time is proportionally longer at lower temperatures. If thinning is required for brush, roller, conventional spray or airless application, use HEMPEL'S THINNER 08080. Equipment should be promptly cleaned with THINNER 08080 after use. The ship may be floated when final coat is dry for 12 hours. Prolonged exposure to the atmosphere may effect the properties of this product.

STORAGE and DISPOSAL

PROHIBITIONS:

Do not contaminate water, food or feed by storage or disposal. Open dumping is prohibited.

PESTICIDE DISPOSAL:

Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by using label instructions, contact your State pesticide or environmental control agency, or hazardous waste representative at the nearest EPA Regional Office.

CONTAINER DISPOSAL:


Triple rinse (or equivalent) then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other approved State and Local procedures.

GENERAL:

Consult Federal, State, or Local authorities for approved alternative procedures.

Meets MACT for Shipbuilding / Repair under NESHAP regulations of the Clean Air Act Amendments of 1990.

VOHAP / VOC content (grams/liter): < 400 VOHAP / VOC content (grams / liter solids): < 765

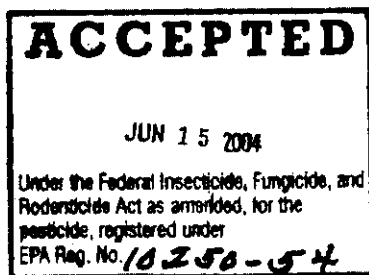

Reserved for DOT shipping Description, classes, UN Id number, packing group, not part of Pesticide label