

T.M.

AQUAPHASE

S-TEC-2

USDA registration number 10336-2

AQUAPHASE

FOR INDUSTRIAL USE ONLY
STORE IN DRY AREA

LABORATORIES Inc.

ADRIAN, MICHIGAN 49221

ACTIVE INGREDIENT

poly [oxyethylene (dimethyliminio) ethylene
(dimethyliminio) ethylene dichloride] . . .

Percent
by Weight

10.0 %

INERT INGREDIENTS

90.0 %

Weight of Aquaphase S-TEC-2 per gallon . . 8.49 lbs.

Weight of active ingredients per gallon . . . 0.85 lbs.

CONTENTS: LIQUID

30 gallons - Approximate net weight 255 pounds


APPLICATIONS

AQUAPHASE S-TEC-2 is used to control algae, bacteria and fungi in recirculating commercial and industrial water cooling towers. Prior to its use, systems must be cleaned to remove algal growth, microbiological slime, and other deposits. An initial slug addition of 6.0 to 15.0 fluid ounces of AQUAPHASE S-TEC-2 per 1000 gallons of water, to provide a concentration of 48 to 120 parts per million of AQUAPHASE S-TEC-2 based on the total weight of water in the system is recommended. Subsequent slug additions of 1.5 to 15.0 fluid ounces of AQUAPHASE S-TEC-2 per 1000 gallons of water (12 to 120 parts per million of AQUAPHASE S-TEC-2) should be employed every 2-5 days or as needed. The frequency of addition depends upon the relative amount of bleedoff and the severity of the microbiological problem. Slug additions should be made in the sump of water cooling towers.

CAUTION: KEEP OUT OF REACH OF CHILDREN

Harmful if swallowed. Avoid contact with skin and eyes. In case of contact flush with plenty of water for at least 15 minutes. If eye irritation persists get medical attention. Avoid contamination of food.

This product is toxic to fish. Do not add treated effluent to lakes, streams or ponds. Do not contaminate water by cleaning of equipment or disposal of waste. Use only as directed on label.

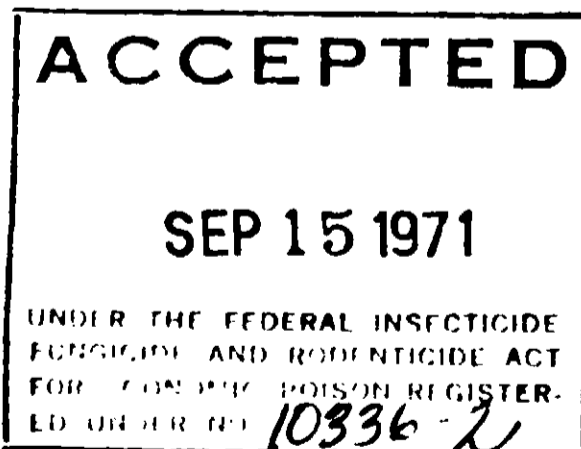

Do not reuse container. DESTROY WHEN EMPTY.
Manufactured by AQUAPHASE LABORATORIES, INC., Adrian, Michigan 49221