

OCT 11 1984

Aquaphase Laboratories, Inc.  
1425 E. Michigan Street  
Adrian, MI 49221

Gentlemen:

Subject: Aquaphase S-Tec-6  
EPA Registration No. 10336-3  
Resubmission of August 20, 1984

The amendment referred to above, submitted in connection with registration under FIFRA sec. 3(c)(7)(A), is acceptable provided that you:


1. Submit and/or cite all data required for registration/reregistration of your product under FIFRA sec. 3(c)(5) when the Agency requires all registrants of similar products to submit such data.

2. Submit five (5) copies of your final printed labeling before you release the product for shipment.

If these conditions are not complied with, the registration will be subject to cancellation in accordance with FIFRA sec. 6(e). Your release for shipment of the product constitutes acceptance of these conditions.

A stamped copy of the label is enclosed for your records.

Sincerely yours,

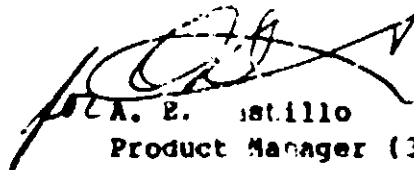

A. E. Castillo  
Product Manager (32)  
Disinfectants Branch  
Registration Division (TS-767C)

Enclosure

RD/DIS:Jenkins:DCR-50018:WANG-0207L:eg:Raven:479-2013:9/12/84:Del.9/28/84

CONCURRENCES							
SYMBOL ▶							
SURNAME ▶							
DATE ▶							

aquaphase

274

STC-6

CHLORINE COMPOSITION

aquaphase®

LABORATORIES, INC.

1475 E. Michigan Street P. O. Box, Michigan 48221

FOR INDUSTRIAL USE ONLY

STORE IN DRY AREA

ACTIVE INGREDIENT

Percent  
by Weight

1,1-DIBROMO-2,2-DICHLOROETHANE  
99.00%

99.00%

1.00%

100.00%

KEEP OUT OF REACH OF CHILDREN

DANGER

... (faint text) ...

ACCEPTED  
with COMMENTS  
On EPA Letter Dated

OCT 11 1984

Under the Federal Insecticide,  
Fungicide, and Plant Nematicide Act  
as amended for the pest control  
registered under EPA Reg. No.

10336-3

EPA REGISTRATION NO. 10336-3  
EPA ESTABLISHMENT NO. 10336-MI-1

CONTENTS: NET WEIGHT LB.

BEST AVAILABLE COPY

39

Side Panel

Precautionary Statements

Hazards to Humans  
and Domestic Animals

DANGER: Highly corrosive. Causes skin and eye damage. May be fatal if swallowed. Do not get in eyes, on skin or on clothing. Wear goggles or face shield and rubber gloves when handling. Irritating to nose and throat. Avoid breathing dust. Remove and wash contaminated clothing before reuse.

Environmental Hazards

This product is toxic to fish. Do not add directly to water or wetlands. Do not contaminate water by cleaning of equipment or disposal of wastes.

Physical and Chemical Hazards

Strong Oxidizing Agent: Mix only with water. Use clean dry utensils. Do not add this product to any dispensing device containing remnants of any other product. Such use may cause a violent reaction leading to fire or explosion. Contamination with moisture, organic matter, or other chemicals may start a chemical reaction, with generation of heat, liberation of hazardous gases, and possible generation of fire and explosion. In case of contamination or decomposition, do not reveal container. If possible, isolate container in open air or well ventilated area. Flood with large volume of water, if necessary.

Directions for Use

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

Storage and Disposal

(14 pt)

Do not contaminate water, food, or feed by storage or disposal.

Storage: Do not stack more than four drums high. Leaking or damaged drums should be placed in overpack drums for disposal. Spills should be absorbed in sawdust or sand and disposed of in a sanitary landfill. Keep container closed when not in use.

Pesticide Disposal: Wastes resulting from the use of this product may be disposed of on site or at an approved waste disposal facility.

Container Disposal: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, by incineration, or, if allowed by state and local authorities, by burning. If burned, stay out of smoke.

BEST AVAILABLE COPY

29

Side Panel (cont)

Applications

This product is intended for use in controlling bacteria. For use in Northeast United States climates ad Michigan, Ohio, Indiana, and Illincis for controlling bacterial growth in open recirculating cooling water systems, or once through systems.

Directions for Use: Add to sump initially when the system is vis-ably fouled with slime or efficiency is impaired. 1/4 lb. per 1000 gallons of water contained in the system. Check chlorine residual with test kit and maintain 0.6 ppm for about 4 hours. If system is badly fouled with slime and debris, clean manually before using this product. Repeat dosage as needed to maintain 0.6 ppm. Keep pH of water between 7.2 - 7.5 with a kit for pH control.