

10352 18

13

UNITED STATES ENVIRONMENTAL PROTECTION AGENCY

FEB 14 1995

Union Carbide Corporation
P. O. Box 670
Bound Brook, NJ 08805

Attention: Ms. Joan E. Young,
Regulatory Affairs Manager

Subject: UCARSAN SANITIZER 420
EPA Registration Number 10352-18
Your Submission dated January 3, 1994
EPA Received Date January 13, 1994

The amendment referred to above, submitted in connection with registration under the Federal Insecticide, Fungicide, and Rodenticide Act, as amended, to amend the Hazards Warnings Statements, is acceptable.

The subheading "Hazards to Humans and Domestic Animals" is acceptable.


Revise the statement "May cause allergic skin reaction" to read " Prolonged or frequently repeated skin contact may cause allergic reactions in some individuals."

The statement "Causes asthmatic signs and symptoms in hyper-reactive individuals" is acceptable.

A stamped copy of the labeling is enclosed for your records. Submit one (1) copy of the final printed label prior to release of the product for shipment.

If you have any questions concerning this letter, please contact Karen M. Leavy-Munk at (703)-305-6966.

Sincerely,



Walter C. Francis
Acting Product Manager(31)
Antimicrobial Program Branch
Registration Division(7505C)

CONCURRENCES

SYMBOL							
SJRNAME							
DATE							

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS**

**DANGER
KEEP OUT OF REACH OF CHILDREN**

Corrosive. Causes irreversible eye damage. Causes skin irritation. Harmful if inhaled.
Harmful if swallowed. May cause allergic skin reaction.
Causes asthmatic signs and symptoms in hyper-reactive individuals.
Do not get in eyes, on skin, on clothing.
Avoid breathing vapor. Do not swallow.
Wear goggles, protective clothing, and rubber gloves.
Wash thoroughly with soap and water after handling.
Remove contaminated clothing and wash before reuse.

ENVIRONMENTAL HAZARDS

This pesticide is toxic to fish. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

STORAGE AND HANDLING


UCARSAN® 420 Sanitizer solutions are incompatible with many commonly used materials of construction such as steel, galvanized iron, aluminum, tin, and zinc. These solutions can be stored and handled in baked phenolic-lined steel, polyethylene, stainless steel, or reinforced epoxy-plastic equipment. This product freezes at about 16°F (-9°C). Therefore, unless the storage tank is inside or underground, heating and insulation may be required. If heating is needed, exposure to high temperatures should be avoided. For short storage times (up to about 1 month), temperatures of up to 100°F (37.8°C) can be tolerated but the preferred maximum storage temperature is about 80°F (26.7°C).
A stainless steel centrifugal pump is suggested for transfer service. Spral wound stainless steel with TEFLON® is suitable for gaskets and packing.

LIMITED WARRANTY AND DISCLAIMER

The manufacturer warrants (a) that this product conforms to the chemical description on the label; (b) that this product is reasonably fit for the purposes set forth in the directions for use when it is used in accordance with such directions; and (c) that the directions, warnings and other statements on the label are based upon responsible experts' evaluation of reasonable tests of effectiveness and of toxicity to laboratory animals. Tests have not been made on all varieties or in all states or under all conditions. THE MANUFACTURER NEITHER MAKES NOR INTENDS, NOR DOES IT AUTHORIZE ANY AGENT OR REPRESENTATIVE TO MAKE, ANY OTHER WARRANTIES, EXPRESSED OR IMPLIED, AND IT EXPRESSLY EXCLUDES AND DISCLAIMS ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR PARTICULAR PURPOSE. This warranty does not extend to, and the Buyer shall be solely responsible for, any and all loss or damage which results from the use of this product in any manner which is inconsistent with the label directions, warnings or cautions.

BUYER'S EXCLUSIVE REMEDY AND MANUFACTURER'S OR SELLER'S EXCLUSIVE LIABILITY FOR ANY AND ALL CLAIMS, LOSSES, DAMAGES, OR INJURIES RESULTING FROM THE USE OR HANDLING OF THIS PRODUCT, WHETHER OR NOT SUCH LIABILITY IS BASED IN CONTRACT, NEGLIGENCE, STRICT LIABILITY IN TORT OR OTHERWISE SHALL BE LIMITED, AT THE MANUFACTURER'S OPTION, TO REPLACEMENT OF, OR THE REPAYMENT OF THE PURCHASE PRICE FOR, THE QUANTITY OF PRODUCT WITH RESPECT TO WHICH DAMAGES ARE CLAIMED. IN NO EVENT SHALL MANUFACTURER OR SELLER BE LIABLE FOR SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES RESULTING FROM THE USE OR HANDLING OF THIS PRODUCT.

**BEFORE HANDLING OR USING, READ AND UNDERSTAND
CURRENT UNION CARBIDE MATERIAL SAFETY DATA
SHEET FOR THIS PRODUCT.**

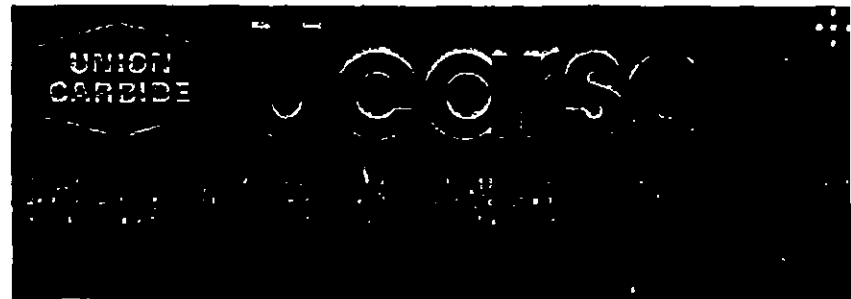

Active Ingredient: Glutaraldehyde 20
Inert Ingredients: 80
100

**KEEP OUT OF REACH OF CHILDREN
DANGER**

STATEMENT OF PRACTICAL TREATMENT

IF IN EYES: Immediately flush with plenty of water for at least 15 minutes. Get immediate medical attention.
IF ON SKIN: Wash with plenty of soap and water. Get medical attention.
IF INHALED: Remove to fresh air. If breathing is difficult, administer oxygen. If symptoms persist, get medical attention.
IF SWALLOWED: DO NOT INDUCE VOMITING. Do not give anything to drink. Seek medical attention immediately.
NOTE TO PHYSICIAN: Aspiration may cause lung damage. Probable mucosal damage may require use of gastric lavage.

SEE SIDE PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS

UNION CARBIDE CORPORATION

39 Old Ridgebury Road • Danbury, CT 06817-0001
EPA Reg No. 10352-18
UCARSAN® is a registered trademark of Union Carbide
Net Contents 5 or 55 gallons

EPA Est. No. UC

PRODUCT CODE	CONTAINER SIZE	CONTAINER SIZE
	55 GALLONS	55 GALLONS
NET WEIGHT	420 POUNDS	420 POUNDS
	NET WEIGHT	NET WEIGHT

**EMERGENCY CONTACT (24 HOURS PER DAY): IN USA 1-800-UCC-HELP (937-4353)
OUTSIDE USA 01-304-7444**

BEST AVAILABLE COPY

prior to mixing in the application equipment. All regulations, either state or federal, relating to the application of liquid fertilizers or liquid iron and this product must be strictly followed. The following compatibility test should always be performed prior to full-scale mixing.

1. Pour 18 ounces of water into a quart jar.
2. Add 1 ounce of either the liquid fertilizer or liquid iron to be used.
3. Add 1 ounce of Tri-Power®.
4. Close jar and shake well.
5. Watch the mixture for several seconds after shaking and check again after 30 minutes.
6. If the mixture does not show signs of separating, the combination may be used. If the mixture foams excessively, gels, separates or gets very thick, do not combine for field application.
7. Compatibility may be improved by the use of a compatibility agent. Some suggested compatibility agents to try are Kalo Laboratories Complex, Hopkins Chemical's Unite, Farm Chemicals Inc.'s Compat, Harcros Chemicals' T-Mulz 734-2, Rigo Company's Rigo Compatibility Agent, Witco Chemical's Sponto 168D, Amoco Oil's Amoco Spray Mate and Universal Coop.'s Chem-Link. These agents are all used in the same manner. Follow the previously outlined test procedures and add 1/6 ounce of the compatibility agent between steps (the compatibility agent must be added to the fertilizer or iron before adding the Tri-Power®).
8. If the mixture does not separate, gel, foam or get very thick, it may be used for field application. Mix only the amount to be sprayed. Do not allow to stand overnight.

ORNAMENTAL LAWNS AND TURFS

Cool Season Grasses: Apply Tri-Power Selective Herbicide at the rate of 2-1/2 to 3-1/2 pints in 20 to 240 gallons of spray solution per acre (0.9 to 1.25 fl. oz. in 0.5 to 4 gallons of water per 1,000 square feet) to control weeds growing in ornamental lawn turf planted to Kentucky bluegrass, perennial ryegrass, tall fescue or fine fescue. Avoid applications to bentgrass maintained as a desired turfgrass as temporary injury may result. Where bentgrass or other sensitive grasses are predominant in a lawn, use the lower rate.

Warm Season Grasses: Apply Tri-Power Selective Herbicide at the rate of 2 to 3 pints in 2 to 240 gallons of spray solution per acre (0.7 to 1.1 fl. oz. in 0.5 to 4 gallons of water per 1,000 square feet) to control weeds growing in bermuda grass or zoysia grass. Applications to other grass species including bahiagrass, kikuyugrass, buffalograss, centipede-grass, carpet grass or St. Augustinegrass should be avoided unless injury can be tolerated. Avoid applications to warm season grasses emerging from winter dormancy unless a slight delay in Spring green-up can be tolerated.

WEEDS CONTROLLED BY TRI-POWER®

Bindweed, Black Medic, Buckhorn, Burdock, Buttercup, Canada thistle, Carpetweed, Chickweed, Chicory, Clover, Cocklebur, Dandelion, Dock, Dog fennel, English daisy, Florida pusley, Frenchweed, Goldenrod, Ground ivy, Hawkweed, Healall, Heartloaf drymary, Henbit,