

B A

A B

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS**

DANGER

KEEP OUT OF REACH OF CHILDREN

Corrosive. Causes burns. Causes eye damage and skin irritation. Avoid breathing vapors. Do not get in eyes, on skin or on clothing. May be absorbed through skin. Wear goggles or face shield and rubber gloves when handling. May be harmful or fatal if swallowed. Avoid contamination of food.

ENVIRONMENTAL HAZARDS

Keep out of lakes, ponds, streams, tidal marshes, estuaries, and public waters. Do not contaminate water by cleaning of equipment or disposal of wastes.

**DIRECTIONS FOR USE
GENERAL CLASSIFICATION**

It is a violation of federal law to use this product in a manner inconsistent with its labeling.

STORAGE AND DISPOSAL

- 1. PROHIBITIONS** — Do not contaminate water, food, or feed by storage or disposal. Open dumping is prohibited.
- 2. PESTICIDE DISPOSAL** — Pesticide, spray mixture, or rinsate that cannot be used or chemically processed should be disposed of in a landfill approved for pesticides or buried in a safe place away from water supplies.
- 3. CONTAINER DISPOSAL** — (a) Reseal container and offer for reconditioning, or (b) Triple rinse (or equivalent) and: Offer for recycling, reconditioning, or disposal in approved landfill, or bury in a safe place.
- 4. GENERAL** — Consult federal, state or local disposal authorities for approved alternative procedures.

MENTS
NS
ER
CHILDREN


irritation. Avoid breathing vapors. Do not get on skin or through skin. Wear goggles or face shield if swallowed. Avoid contamination

ARDS
and public waters. Do not contaminate

SE
TION


inconsistent with its labeling.

AL
e or disposal. Open dumping is prohibited.
not be used or chemically processed should be placed away from water supplies.
tioning, or (b) Triple rinse (or equivalent) and dry completely, or bury in a safe place.
approved alternative procedures.

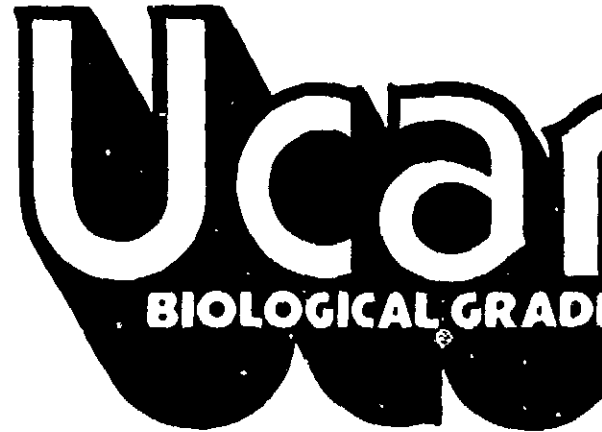

225 ANTIMONY

THIS PRODUCT IS FOR MANUFACTURING USE ONLY, IN FORM OF

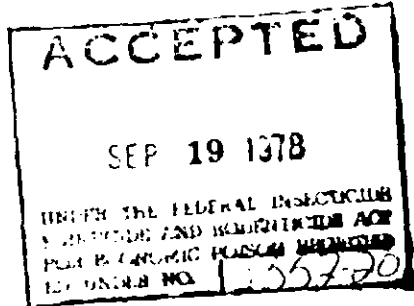

Active Ingredient: Glutaraldehyde
Inert Ingredients:

This product contains 2.21 pounds of active ingredient per gallon.

KEEP OUT OF REACH OF CHILDREN

DANGER

STATEMENT OF PRACTICAL TREATMENT

FIRST AID: In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes. Remove contaminated clothing and wash contaminated clothing before reuse.

If swallowed, drink promptly a large quantity of milk, egg whites, gelatin solution or water. Avoid alcohol. Call a physician immediately.

NOTE TO PHYSICIAN: Probable mucosal damage may contraindicate the use of gastric lavage. Respiratory depression and convulsion may be needed.

UNION CARBIDE CORPORATION • C

270 PARK AVENUE, NEW YORK, N.Y. 10017

EPA Reg. No. 10352-20

UCARCIDE is a registered trade mark of Union Carbide Corporation

Ucarcide

BIOLOGICAL GRADE

225 ANTIMICROBIAL

FOR INDUSTRIAL FORMULATING USE ONLY, IN FORMULATING INDUSTRIAL BACTERICIDES.

Active Ingredient: Glutaraldehyde	25.0%
Inert Ingredients:	75.0%
	<u>100.0%</u>

This product contains 2.21 pounds of glutaraldehyde per gallon.

KEEP OUT OF REACH OF CHILDREN

DANGER

STATEMENT OF PRACTICAL TREATMENT

If in contact with eyes or skin, wash immediately with plenty of water for at least 15 minutes. For eyes, call a physician. Remove clothing if contaminated. If in contact with milk, egg whites, gelatin solution or if these are not available, drink large quantities of water. Medical attention may contraindicate the use of gastric lavage. Measures against circulatory shock, respiratory distress, and shock should be taken.

AMERICAN CHEMICAL CORPORATION • CHEMICALS AND PLASTICS

Ucarcide Corporation

EPA Est. No. 10352—WV—2
 UCC No.
 Made in U.S.A.

PHYSICAL PROPERTIES

Specific Gravity at 20/20 C.
 Vapor Pressure at 20 C.
 Freezing Point

STORAGE AND HANDLING

Ucarcide® 225 solutions are corrosive to iron, aluminum, tin, and zinc. If used in steel, or reinforced epoxy plastic, inside or underground, heat treatments should be avoided. For storage, but the preferred maximum storage is 6 months. A stainless steel centrifugal pump is recommended for handling.

WARRANTY:

1. The manufacturer guarantees the material as stated within lawful limits and (if applicable) responsible experts' evaluation.
2. The manufacturer further warrants that the material is fit for the use directed hereon. The manufacturer does not warrant that the material is suitable for any other use. THE BUYER IS RESPONSIBLE TO MAKE ANY OTHER WARRANTY. THE BUYER ASSUMES ALL RISKS OF USE, INCLUDING LIABILITY FOR SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES. THE MANUFACTURER'S CONTROL. No claim of any kind shall be made against the manufacturer for special, indirect or consequential damages.
3. No modification of this warranty shall be made by any authorized employee of the manufacturer.

NET WT. 490 LBS. (222.2 kg)
 NET VOL. 55 GALS (207.0 L)

C
B
A

PROPERTIES

at 20/20 C.	1.124	Solubility in Water at 20 C.	Complete
at 20 C.	17 mm. Hg	Solubility of Water in at 20 C.	Complete
	-14 C.	pH at 25 C.	3.7 to 4.5

STORAGE AND HANDLING

Solutions are corrosive to many commonly used materials of construction, such as steel, galvanized iron, and zinc. These solutions can be stored and handled in baked-phenolic-lined steel, stainless steel, and epoxy plastic equipment. This product freezes at about -7 C. Therefore, unless the storage tank is underground, heating and insulation may be required. If heating is needed, exposure to high temperatures should be avoided. For short storage times (up to about a month), temperatures up to 100 F. can be tolerated, but the maximum storage temperature is about 80 F.

A centrifugal pump is suggested for transfer service. Asbestos is suitable for gaskets and packing.

The manufacturer warrants (a) that the active ingredient content and the total net weight are as stated on the label and (b) that the directions, warnings and other statements on this label are based upon the manufacturer's evaluation of reasonable tests of effectiveness and of toxicity to laboratory animals.

The manufacturer further warrants that the material herein is reasonably fit for use under normal conditions as stated on the label. The manufacturer DOES NOT MAKE AND DOES NOT AUTHORIZE ANY AGENT OR REPRESENTATIVE TO MAKE ANY OTHER WARRANTIES OF FITNESS OR OF MERCHANTABILITY, GUARANTEE OR REPRESENTATION, EXPRESS OR IMPLIED, CONCERNING THIS MATERIAL. This product is sold only on the basis that the user assumes all risks of use, handling, or storage which result in loss or damage and which are beyond the manufacturer's claim of any kind, and whether or not based on negligence, shall be greater in amount than the value of the material in respect of which such claim is made. In no event shall manufacturer or seller be liable for indirect or consequential damages resulting from the use, handling or storage of this material.

No modification of this warranty and disclaimer is authorized, except by specific reference to them in writing by an authorized representative of the manufacturer.

90 LBS. (222.7 Kg.)

55 GALS.(U.S.) (203.7 LITERS)

A
B