

See MSDS for exposure limits of components.

PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS

DANGER

KEEP OUT OF REACH OF CHILDREN

Corrosive. Causes irreversible eye damage. Causes skin irritation. Harmful if inhaled. Harmful if swallowed. May cause skin sensitization.

Do not get in eyes, on skin, on clothing. Avoid breathing vapor. Do not swallow

Wear goggles, protective clothing and rubber gloves. Wash thoroughly with soap and water after handling. Remove contaminated clothing and wash before reuse

ENVIRONMENTAL HAZARD

This pesticide is toxic to fish. Do not discharge effluent containing this active ingredient into streams, ponds, estuaries, oceans, or public waters unless this product is specifically identified in an NPDES permit. Do not discharge effluent containing this product to sewerage systems without previously notifying the sewerage treatment plant authority. For guidance, contact your local Board or Regional Office of the EPA.

PHYSICAL PROPERTIES

Specific Gravity at 20-20°C: 1.042 Solubility in Water at 20°C: Complete
Vapor Pressure at 20°C: 18.1 mm Hg Solubility of Water in at 20°C: Complete
Freezing Point: 6.5°C pH at 25°C: 3.1 to 4.5

STORAGE AND HANDLING



AQUICAR® 515 Water Treatment Microbiocide solutions are corrosive to many commonly used materials of construction such as steel, galvanized iron, aluminum, tin, and zinc. These solutions can be stored and handled in baked phenolic lined steel, polyethylene, stainless steel, or reinforced epoxy plastic equipment. This product freezes at about 6.5°F (20°C). Therefore, unless the storage tank is inside or underground, heating and insulation may be required. If heating is needed, exposure to high temperatures should be avoided. For short storage times (up to about 1 month), temperatures of up to 100°F can be tolerated but the preferred maximum storage temperature is about 80°F.

A stainless steel centrifugal pump is suggested for transfer service. Spiral wound stainless steel with TEFLONE is suitable for gaskets and packing.

STORAGE AND DISPOSAL

PESTICIDE DISPOSAL: Do not contaminate water, food, or feed by storage or disposal. Open burning is not permitted. Pesticide wastes are toxic and must be disposed of in accordance with local, state, or federal regulations. If these wastes cannot be disposed of by use, they should be sent to a hazardous waste disposal site. For more information, contact your State Pesticide Control Agency or the Environmental Waste Agency, U.S. Environmental Agency, Washington, D.C.

CONTAINER DISPOSAL: Metal Containers or Plastic Containers: Triple rinse, then allow to drain completely before disposal. Do not reuse for food or beverage. Plastic Containers: May be recycled through existing programs. Check with your local recycling center for more information. Do not burn.

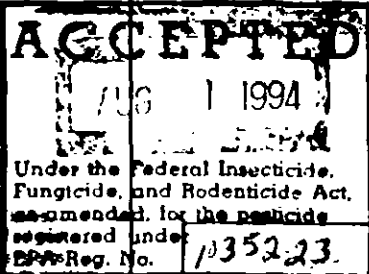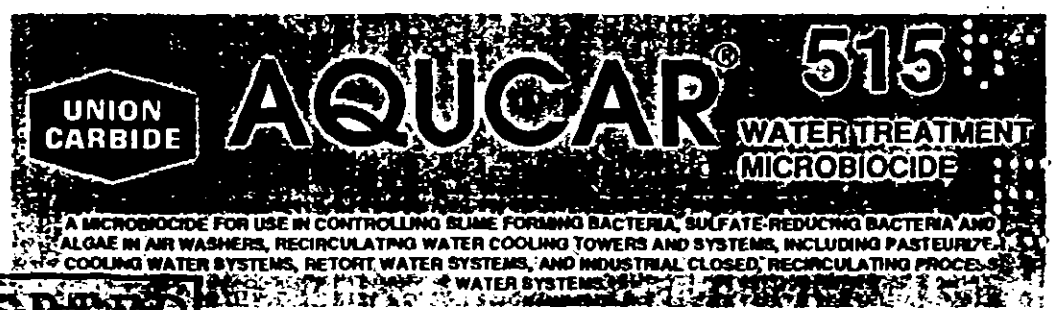

Active Ingredient: Glutaraldehyde 15.0%
Inert Ingredients: 85.0%
100.0%

KEEP OUT OF REACH OF CHILDREN DANGER

STATEMENT OF PRACTICAL TREATMENT

IF IN EYES: Immediately flush with plenty of water for at least 15 minutes. Get immediate medical attention.
IF ON SKIN: Wash with plenty of soap and water. Get medical attention.
IF INHALED: Remove to fresh air. If breathing is difficult, administer oxygen. If symptoms persist, call a physician.
IF SWALLOWED: DO NOT INDUCE VOMITING. Do not give anything to drink. Seek medical advice with urgency.
Note to Physician: Aspiration may cause lung damage. Probable mucosal damage may contraindicate the use of gastric lavage.

UNION CARBIDE CHEMICALS AND PLASTICS COMPANY INC. SPECIALTY CHEMICALS DIVISION

39 Old Ridgebury Road • Danbury, CT 06817 0001
EPA Reg. No. 10352-23
AQUICAR® is a registered trademark of Union Carbide Corporation
Net Contents 30 or 55 gallons

EPA Est No. 10352 WV-2
UCC-P90225 (D 291)
Made In USA
PE0494

Table with 2 columns: 90225, and other alphanumeric codes.

EMERGENCY CONTACT: (24 HOURS PER DAY) IN USA 1-800-UCC-HELP (1-800-822-4357)
OUTSIDE USA 01-304-774-3467

DIRECTIONS

It is a violation of Federal law to use this product in a manner inconsistent with the label directions.

AIR WASHERS AND RECIRCULATING WATER SYSTEMS

AQUICAR® 515 Water Treatment Microbiocide should be added to the recirculating water in a uniform manner such as the basin area. Addition in a central point is not recommended. Badly fouled systems can be shock treated with Microbiocide. Under these conditions, blowdown should be maintained.

INTERMITTENT (SLUG) FEEDING

Initial Dose: When the system is noticeably fouled, add 100 mg of Water Treatment Microbiocide per 100 gallons of water.
Subsequent Dose: When microbial control is evident, add 10 mg of Water Treatment Microbiocide per 100 gallons of water to maintain control.
Badly fouled systems must be cleaned before treatment.

CONTINUOUS FEEDING

Initial Dose: When the system is noticeably fouled, add 100 mg of Water Treatment Microbiocide per 100 gallons of water.
Subsequent Dose: Maintain this treatment level by starting with 10 mg of AQUICAR® 515 Water Treatment Microbiocide per 100 gallons of water.
Badly fouled systems must be cleaned before treatment.

HEAT TRANSFER EQUIPMENT

(Evaporative Condensers, Hydrostatic Sterilizers and Retorts)
AQUICAR® 515 Water Treatment Microbiocide should be added in the same manner as described above. It should be added to 100 gallons of water in a basin area, sump area, or other reservoir or collection area. The solution should be circulated uniformly throughout the system.

LIMITED WARRANTY AND DISCLAIMER

The manufacturer warrants (a) that this product conforms to the description and specifications on the label and (b) that the product is reasonably fit for the purposes set forth in the directions for use when used in accordance with the directions, warnings and other statements on this label. Tests have not been conducted to determine the effectiveness of this product on laboratory animals. Tests have not been conducted to determine the effectiveness of this product on laboratory animals. THE MANUFACTURER NEITHER MAKES NOR INTENDS TO MAKE ANY OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. The Buyer shall be solely responsible for the use of this product in any manner which is inconsistent with the label directions. EXCLUSIVE REMEDY AND MANUFACTURER'S OR SUPPLIER'S LIABILITY FOR DAMAGES OR INJURIES RESULTING FROM THE USE OF THIS PRODUCT SHALL BE LIMITED TO THE MANUFACTURER'S OR SUPPLIER'S REASONABLE SHARE OF THE PURCHASE PRICE FOR THE QUANTITY OF PRODUCT WHICH IS DEFECTIVE. MANUFACTURER'S OR SUPPLIER'S LIABILITY SHALL BE LIMITED TO THE PURCHASE PRICE FOR THE QUANTITY OF PRODUCT WHICH IS DEFECTIVE.