


PM 31

10352-35

1/2

UNITED STATES ENVIRONMENTAL PROTECTION AGENCY



Union Carbide Corporation
P. O. Box 670
Bound Brook, NJ 08805

Attention: Joan E. Young


Subject: UCARCIDE 750 Antimicrobial
EPA Registration Number 10352-35
Your Submission Dated September 14, 1995
EPA Received Date September 18, 1995

The labeling referred to above, submitted in connection with registration under the Federal Insecticide, Fungicide, and Rodenticide Act, as amended, is acceptable.

A stamped copy of the labeling is enclosed for your records. As new labels are prepared, delete the term, "General Classification", since this product is not classified.

If you have any questions concerning this letter, please contact Karen M. Leavy-Munk at (703)-305-6966.

Sincerely yours,


Marion J. Johnson
Product Manager (31)
Antimicrobial Program Branch
Registration Division (7505C)

CONCURRENCES

| SYMBOL | | | | | | | |
|---------|--|--|--|--|--|--|--|
| SURNAME | | | | | | | |
| DATE | | | | | | | |

PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS

DANGER

KEEP OUT OF REACH OF CHILDREN

Corrosive. Causes irreversible eye damage. Causes skin burns. Harmful if inhaled. May be fatal if swallowed. Harmful if absorbed through skin. Prolonged or frequently repeated skin contact may cause allergic reactions in some individuals. Causes asthmatic signs and symptoms in hyper-reactive individuals.
Do not get in eyes, on skin, on clothing.
Avoid breathing vapor. Do not swallow.
Wear goggles, protective clothing, and rubber gloves.
Wash thoroughly with soap and water after handling.
Remove contaminated clothing and wash before reuse.

ENVIRONMENTAL HAZARDS

This pesticide is toxic to fish. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

STORAGE AND HANDLING


UCARCIDE® 750 Antimicrobial solutions are incompatible with many commonly used materials of construction such as steel, galvanized iron, aluminum, tin, and zinc. These solutions can be stored and handled in baked phenolic-lined steel, polyethylene, stainless steel, or reinforced epoxy-plastic equipment. This product freezes at about -6°F (-21°C). Therefore, unless the storage tank is inside or underground, heating and insulation may be required. If heating is needed, exposure to high temperatures should be avoided. For short storage times (up to about 1 month), temperatures of up to 100°F (37.8°C) can be tolerated but the preferred maximum storage temperature is about 80°F (26.7°C). A stainless steel centrifugal pump is suggested for transfer service. Spiral wound stainless steel with TEFLON® is suitable for gaskets and packing.

LIMITED WARRANTY AND DISCLAIMER

The manufacturer warrants (a) that this product conforms to the chemical description on the label; (b) that this product is reasonably fit for the purposes set forth in the directions for use when it is used in accordance with such directions; and (c) that the directions, warnings and other statements on this label are based upon responsible experts' evaluation of reasonable tests of effectiveness and of toxicity to laboratory animals. Tests have not been made on all varieties or in all states or under all conditions. THE MANUFACTURER NEITHER MAKES NOR INTENDS, NOR DOES IT AUTHORIZE ANY AGENT OR REPRESENTATIVE TO MAKE, ANY OTHER WARRANTIES, EXPRESSED OR IMPLIED, AND IT EXPRESSLY EXCLUDES AND DISCLAIMS ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR PARTICULAR PURPOSE. This warranty does not extend to, and the Buyer shall be solely responsible for, any and all loss or damage which results from the use of this product in any manner which is inconsistent with the label directions, warnings or cautions.

BUYER'S EXCLUSIVE REMEDY AND MANUFACTURER'S OR SELLER'S EXCLUSIVE LIABILITY FOR ANY AND ALL CLAIMS, LOSSES, DAMAGES, OR INJURIES RESULTING FROM THE USE OR HANDLING OF THIS PRODUCT, WHETHER OR NOT SUCH LIABILITY IS BASED IN CONTRACT, NEGLIGENCE, STRICT LIABILITY IN TORT OR OTHERWISE, SHALL BE LIMITED, AT THE MANUFACTURER'S OPTION, TO REPLACEMENT OF, OR THE REPAYMENT OF THE PURCHASE PRICE FOR, THE QUANTITY OF PRODUCT WITH RESPECT TO WHICH DAMAGES ARE CLAIMED. IN NO EVENT SHALL MANUFACTURER OR SELLER BE LIABLE FOR SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES RESULTING FROM THE USE OR HANDLING OF THIS PRODUCT.

**BEFORE HANDLING OR USING, READ AND UNDERSTAND
CURRENT UNION CARBIDE MATERIAL SAFETY DATA
SHEET FOR THIS PRODUCT.**

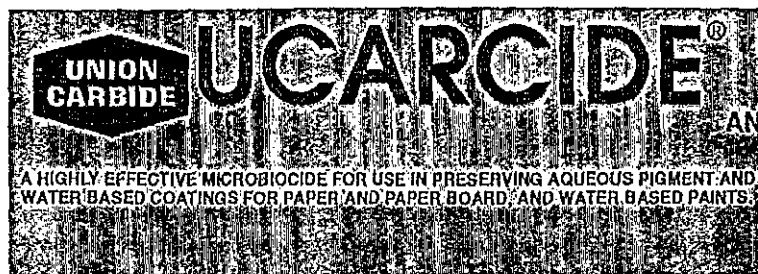

Active Ingredient: Glutaraldehyde 50.0%
Inert Ingredients: 50.0%
100.0%

KEEP OUT OF REACH OF CHILDREN

DANGER

STATEMENT OF PRACTICAL TREATMENT

IF IN EYES: Immediately flush with plenty of water for at least 15 minutes. Get immediate medical attention.
IF ON SKIN: Immediately wash with plenty of soap and water. Get medical attention.
IF INHALED: Remove to fresh air. If breathing is difficult, administer oxygen. If symptoms persist, seek medical attention.
IF SWALLOWED: DO NOT INDUCE VOMITING. Do not give anything to drink. Seek medical attention.
NOTE TO PHYSICIAN: Aspiration may cause lung damage. Probable mucosal damage may require the use of gastric lavage.

SEE SIDE PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS

UNION CARBIDE CORPORATION

39 Old Ridgebury Road • Danbury, CT 06817-0001
EPA Reg. No. 10352-35

EPA Est. No. 10352-35
UCC-10352-35

UCARCIDE® is a registered trademark

of Union Carbide
Net Contents 5 or 55 gallons

| 90209 | CONTAINER SIZE 5 GALLONS | CONTAINER SIZE 55 GALLONS | SHIPPING NAME | CORROSIVE LIQUID, ACIDIC, OR (CONTAINS GLUTARALDEHYDE) |
|--------------|-----------------------------|------------------------------|-------------------|---|
| PRODUCT CODE | 46 POUNDS NET WEIGHT | 500 POUNDS NET WEIGHT | HAZARD CLASS 8 | ID NUMBER UN 3265 |

**EMERGENCY CONTACT (24 HOURS PER DAY): IN USA 1-800-UCC-HELP
OUTSIDE USA 01-304-74**