

PRECAUTIONARY STATEMENTS  
HAZARDS TO HUMANS AND DOMESTIC ANIMALS

**DANGER**

**KEEP OUT OF REACH OF CHILDREN**

Corrosive. Causes irreversible eye damage. Causes skin burns. Harmful if inhaled. May be fatal if swallowed. Harmful if absorbed through skin. Prolonged or frequently repeated skin contact may cause allergic reactions in some individuals. Causes asthmatic signs and symptoms in hyper-reactive individuals. Do not get in eyes, on skin, on clothing. Avoid breathing vapor. Do not swallow. Wear goggles, protective clothing, and rubber gloves. Wash thoroughly with soap and water after handling. Remove contaminated clothing and wash before reuse.

**ENVIRONMENTAL HAZARDS**

This pesticide is toxic to fish. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

**STORAGE AND HANDLING**

UCARCIDE® 750 Antimicrobial solutions are incompatible with many commonly used materials of construction such as steel, galvanized iron, aluminum, tin, and zinc. These solutions can be stored and handled in baked phenolic-lined steel, polyethylene, stainless steel, or reinforced epoxy-plastic equipment. This product freezes at about -6°F (-21°C). Therefore, unless the storage tank is inside or underground, heating and insulation may be required. If heating is needed, exposure to high temperatures should be avoided. For short storage times (up to about 1 month), temperatures of up to 100°F (37.8°C) can be tolerated but the preferred maximum storage temperature is about 80°F (26.7°C). A stainless steel centrifugal pump is suggested for transfer service. Spiral wound stainless steel with TERLON® is suitable for gaskets and packing.

**LIMITED WARRANTY AND DISCLAIMER**


The manufacturer warrants (a) that this product conforms to the chemical description on the label; (b) that this product is reasonably fit for the purposes set forth in the directions for use when it is used in accordance with such directions; and (c) that the directions, warnings and other statements on this label are based upon responsible experts' evaluation of reasonable tests of effectiveness and of toxicity to laboratory animals. Tests have not been made on all varieties or in all states or under all conditions. THE MANUFACTURER NEITHER MAKES NOR INTENDS, NOR DOES IT AUTHORIZE ANY AGENT OR REPRESENTATIVE TO MAKE, ANY OTHER WARRANTIES, EXPRESSED OR IMPLIED, AND IT EXPRESSLY EXCLUDES AND DISCLAIMS ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR PARTICULAR PURPOSE. This warranty does not extend to, and the Buyer shall be solely responsible for, any and all loss or damage which results from the use of this product in any manner which is inconsistent with the label directions, warnings or cautions.

BUYER'S EXCLUSIVE REMEDY AND MANUFACTURER'S OR SELLER'S EXCLUSIVE LIABILITY FOR ANY AND ALL CLAIMS, LOSSES, DAMAGES, OR INJURIES RESULTING FROM THE USE OR HANDLING OF THIS PRODUCT, WHETHER OR NOT SUCH LIABILITY IS BASED IN CONTRACT, NEGLIGENCE, STRICT LIABILITY IN TORT OR OTHERWISE, SHALL BE LIMITED, AT THE MANUFACTURER'S OPTION, TO REPLACEMENT OF, OR THE REPAYMENT OF THE PURCHASE PRICE FOR, THE QUANTITY OF PRODUCT WITH RESPECT TO WHICH DAMAGES ARE CLAIMED. IN NO EVENT SHALL MANUFACTURER OR SELLER BE LIABLE FOR SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES RESULTING FROM THE USE OR HANDLING OF THIS PRODUCT.

**BEFORE HANDLING OR USING, READ AND UNDERSTAND  
CURRENT UNION CARBIDE MATERIAL SAFETY DATA  
SHEET FOR THIS PRODUCT.**

PM 31 10352-35

10/1

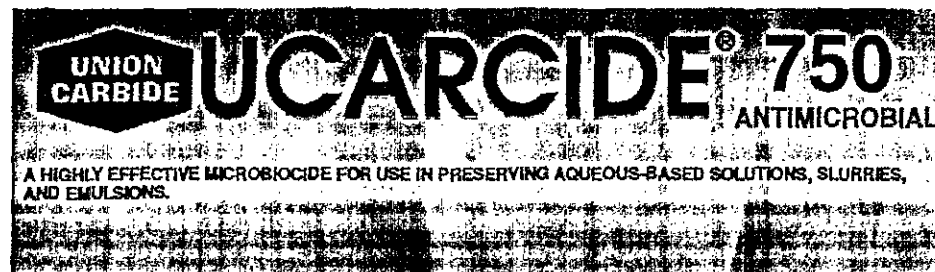

Active Ingredient: Glutaraldehyde \_\_\_\_\_ 50.0%  
Inert Ingredients: \_\_\_\_\_ 50.0%  
100.0%

**KEEP OUT OF REACH OF CHILDREN**

**DANGER**

**STATEMENT OF PRACTICAL TREATMENT**

IF IN EYES: Immediately flush with plenty of water for at least 15 minutes.  
IF ON SKIN: Immediately wash with plenty of soap and water. Get medical attention.  
IF INHALED: Remove to fresh air. If breathing is difficult, administer oxygen. If symptoms persist, call a physician.  
IF SWALLOWED: DO NOT INDUCE VOMITING. Do not give anything to drink. Seek medical advice with urgency.  
NOTE TO PHYSICIAN: Aspiration may cause lung damage. Probable mucosal damage may contraindicate the use of gastric lavage.

SEE SIDE PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS.

**UNION CARBIDE CORPORATION**

89 Old Ridgebury Road • Danbury, CT 06817-0001

EPA Reg. No. 10352-35

UCARCIDE® is a registered trademark

of Union Carbide

Net Contents 5 or 55 gallons

EPA Est. No. 10352-WV-2

UCC-L90209 (F)

Made in USA

PE0197

90209 PRODUCT CODE	CONTAINER SIZE	CONTAINER SIZE	SHIPPING NAME	CORROSIVE LIQUID, ACIDIC, ORGANIC, N.O.S. (CONTAINS GLUTARALDEHYDE)	
	5 GALLONS	55 GALLONS			
	46 POUNDS NET WEIGHT	500 POUNDS NET WEIGHT	H. ZARD CLASS	ID NUMBER UN 3265	PG II

**EMERGENCY CONTACT (24 HOURS PER DAY): IN USA 1-800-UCC-HELP (1-800-822-4357)  
OUTSIDE USA 01-304-744-3487**

**DIRECTIONS FOR USE**

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

**PIGMENTS AND FILLER SLURRIES FOR PAPER AND PAPERBOARD**  
(For use in food contact pigments and filler slurries)

UCARCIDE® 750 Antimicrobial may be used to control the growth of microorganisms which contaminate various systems used in production of paper and paper products. UCARCIDE® 750 Antimicrobial should be added at a point of uniform mixing.

Use from 0.1 to 0.6 lbs (1.4 to 8.2 fluid ounces) of UCARCIDE® 750 Antimicrobial per 1000 pounds of dry powder, to produce a concentration from 100 to 600 ppm (based on slurry solids) in the mixed slurry.

**WATER BASED COATINGS FOR PAPER AND PAPERBOARD**  
(For use in non-food contact coatings only)

Use from 0.1 to 0.6 lbs (1.4 to 8.2 fluid ounces) of UCARCIDE® 750 Antimicrobial per 1000 pounds of dry powder, to produce a concentration from 100 to 600 ppm (based on slurry solids) in the mixed slurry.

**GENERAL PRESERVATIVE APPLICATIONS**  
(Except food contact applications)

UCARCIDE® 750 Antimicrobial is recommended for use in solutions, emulsions, slurries, adhesives and other aqueous-based liquid products to control the growth of bacteria and fungi.

For effective preservation, add UCARCIDE® 750 Antimicrobial to the product formulation at a rate of 200 to 2000 ppm based on the water content of the product (0.2 to 2.0 lbs UCARCIDE® 750 Antimicrobial/ 1000 lbs water content). Mix uniformly.

**STORAGE AND DISPOSAL**

**PESTICIDE DISPOSAL:** Do not contaminate water, food or feed by storage or disposal. Open dumping is prohibited. Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture or residue is a violation of Federal law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or your Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

**CONTAINER DISPOSAL:** Metal Containers or Plastic Containers: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or other procedures approved by state and local authorities. Plastic Containers: May be incinerated, or, if allowed by state and local authorities, by burning. If burned, stay out of smoke. Metal Containers: Must not be incinerated. Do not cut or weld on or near metal containers.

**ACCEPTED**  
FEB 11 1997  
Under the Federal Insecticide,  
Fungicide, and Rodenticide Act  
as amended, for the pesticide  
registered under  
EPA Reg. No. 10352-35

**BEST AVAILABLE COPY**