

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS**

DANGER

KEEP OUT OF REACH OF CHILDREN

Corrosive. Causes irreversible eye damage. Causes skin irritation. Harmful if inhaled. Harmful if swallowed. Harmful if absorbed through skin. Prolonged or frequently repeated skin contact may cause allergic reactions in some individuals. Causes asthmatic signs and symptoms in hyper-reactive individuals. Do not get in eyes, on skin, on clothing. Avoid breathing vapor. Do not swallow. Wear goggles, protective clothing, and butyl or nitrile gloves. Wash thoroughly with soap and water after handling. Remove contaminated clothing and wash before reuse.

ENVIRONMENTAL HAZARDS

This pesticide is toxic to fish. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

STORAGE AND HANDLING

UCARCIDE® 225 Preservative solutions are incompatible with many commonly used materials of construction such as steel, galvanized iron, aluminum, tin, and zinc. These solutions can be stored and handled in baked phenolic-lined steel, polyethylene, stainless steel, or reinforced epoxy-plastic equipment. This product freezes at about 14°F (-10°C). Therefore, unless the storage tank is inside or underground, heating and insulation may be required. If heating is needed, exposure to high temperatures should be avoided. For short storage times (up to about 1 month), temperatures of up to 100°F (37.8°C) can be tolerated but the preferred maximum storage temperature is about 80°F (26.7°C). A stainless steel centrifugal pump is suggested for transfer service. Spiral wound stainless steel with TEFLON® is suitable for gaskets and packing.

LIMITED WARRANTY AND DISCLAIMER

The manufacturer warrants (a) that this product conforms to the chemical description on the label; (b) that this product is reasonably fit for the purposes set forth in the directions for use when it is used in accordance with such directions; and (c) that the directions, warnings and other statements on this label are based upon responsible experts' evaluation of reasonable tests of effectiveness and of toxicity to laboratory animals. Tests have not been made on all varieties or in all states or under all conditions. THE MANUFACTURER NEITHER MAKES NOR INTENDS, NOR DOES IT AUTHORIZE ANY AGENT OR REPRESENTATIVE TO MAKE, ANY OTHER WARRANTIES, EXPRESSED OR IMPLIED, AND IT EXPRESSLY EXCLUDES AND DISCLAIMS ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR PARTICULAR PURPOSE. This warranty does not extend to, and the Buyer shall be solely responsible for, any and all loss or damage which results from the use of this product in any manner which is inconsistent with the label directions, warnings or cautions.

BUYER'S EXCLUSIVE REMEDY AND MANUFACTURER'S OR SELLER'S EXCLUSIVE LIABILITY FOR ANY AND ALL CLAIMS, LOSSES, DAMAGES, OR INJURIES RESULTING FROM THE USE OR HANDLING OF THIS PRODUCT, WHETHER OR NOT SUCH LIABILITY IS BASED IN CONTRACT, NEGLIGENCE, STRICT LIABILITY IN TORT OR OTHERWISE, SHALL BE LIMITED, AT THE MANUFACTURER'S OPTION, TO REPLACEMENT OF, OR THE REPAYMENT OF THE PURCHASE PRICE FOR, THE QUANTITY OF PRODUCT WITH RESPECT TO WHICH DAMAGES ARE CLAIMED. IN NO EVENT SHALL MANUFACTURER OR SELLER BE LIABLE FOR SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES RESULTING FROM THE USE OR HANDLING OF THIS PRODUCT.

**BEFORE HANDLING OR USING, READ AND UNDERSTAND
CURRENT UNION CARBIDE MATERIAL SAFETY DATA
SHEET FOR THIS PRODUCT.**



**FOR USE BY MANUFACTURERS AS A PRESERVATIVE IN INDUSTRIAL, INSTITUTIONAL,
AND CONSUMER PROCESSES AND PRODUCTS.**

Active Ingredient: Glutaraldehyde _____ 25.0%
Inert Ingredients: _____ 75.0%
100.0%

KEEP OUT OF REACH OF CHILDREN

DANGER

STATEMENT OF PRACTICAL TREATMENT

IF IN EYES: Immediately flush with plenty of water for at least 15 minutes. Get immediate medical attention.
IF ON SKIN: Wash with plenty of soap and water. Get medical attention.
IF INHALED: Remove to fresh air. If breathing is difficult, administer oxygen. If symptoms persist, call a physician.
IF SWALLOWED: DO NOT INDUCE VOMITING. Do not give anything to drink. Seek medical advice with urgency.
NOTE TO PHYSICIAN: Aspiration may cause lung damage. Probable mucosal damage may contraindicate the use of gastric lavage.

SEE SIDE PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS.

UNION CARBIDE CORPORATION

39 Old Ridgebury Road • Danbury, CT 06817-0001
EPA Reg. No. 10352-39
UCARCIDE is a registered trademark
of Union Carbide
Net Contents 5 or 55 gallons

EPA Est. No. 10352-WV-2
UCC-L90289 (E 06/99)
Made In USA
PE0699

90289 PRODUCT CODE	CONTAINER SIZE	CONTAINER SIZE
	55 GALLONS	5 GALLONS
	486 POUNDS NET WEIGHT	44 POUNDS NET WEIGHT

**EMERGENCY CONTACT (24 HOURS PER DAY): IN USA 1-800-UCC-HELP (1-800-822-4357)
OUTSIDE USA 01-304-744-3487**

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.
GENERAL PRESERVATIVE USE

UCARCIDE® 225 Preservative is recommended for use in aqueous or water containing products and systems, including industrial, institutional and consumer in-can processes and products, to control the growth of bacteria and fungi. For effective preservation, add UCARCIDE® 225 Preservative to the product formulation at a rate of 0.04% to 0.4% based on the water content of the product (0.4 to 4.0 lb. UCARCIDE® 225 Preservative/1000 lbs. water content). Mix uniformly.

PRESERVATIVE FOR CONCENTRATES

For use in concentrates where effective preservation is needed after dilution, add UCARCIDE® 225 Preservative to the product formulation at a rate such that the diluted end-use product will contain 0.04% to 0.40% UCARCIDE® 225 Preservative.

At no time during the preservation process should the level of UCARCIDE® 225 Preservative exceed 4.0%.

REVERSE OSMOSIS MEMBRANES

For effective preservation of reverse osmosis elements (where approved for compatibility by membrane manufacturer), immerse element in a tank containing 0.4% to 4.0% UCARCIDE® 225 Preservative.


UCARCIDE® 225 Preservative can also be added to in-line recirculating systems for preservation of installed out-of-service reverse osmosis equipment. Add 0.4% to 4.0% UCARCIDE® 225 Preservative to the tank in the circulating system. Maintain UCARCIDE® 225 Preservative concentration by periodic addition to counteract any system leakage.

CONCRETE ADMIXTURES

For effective preservation of concrete admixtures, add UCARCIDE® 225 Preservative to the product formulation at a rate of 4000 to 16,000 ppm based on the weight of the admixture (4.0 to 16.0 lbs UCARCIDE® 225 Preservative/1000 lbs. concrete admixture). Mix uniformly.

STORAGE AND DISPOSAL

PESTICIDE DISPOSAL: Do not contaminate water, food or feed by storage or disposal. Open dumping is prohibited. Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture or residue is a violation of Federal law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or your Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.
CONTAINER DISPOSAL: Metal Containers or Plastic Containers: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or other procedures approved by state and local authorities. **Plastic Containers:** May be incinerated, or, if allowed by state and local authorities, by burning. If burned, stay out of smoke. **Metal Containers:** Must not be incinerated. Do not cut or weld on or near metal containers.

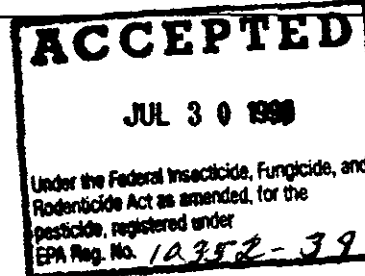

PM33
10352-39
7/30/99
181