

Union Carbide Corporation
P. O. Box 670
Bound Brook, NJ 08805

MAY 8 1994

Attention: Joan E. Young

Subject: PIROR 825 Slimicide
EPA Registration Number 10352-41
Your Submission Dated August 4, 1994
EPA Received Date August 9, 1994

The amendment referred to above, submitted in connection with registration under the Federal Insecticide, Fungicide, and Rodenticide Act, as amended, to amend the Hazard Warnings statements, is acceptable provided that you make the following labeling revisions:

The heading "Hazards to Humans and Domestic Animals" is acceptable.


Revise the statement "May cause allergic skin reaction" to read "Prolonged or frequently repeated skin contact may cause allergic reactions in some individuals."

The addition of the statement "Cause asthmatic signs and symptoms in hyper-reactive individuals" to product labeling is acceptable.

A stamped copy of the labeling is enclosed for your records. Submit one (1) copy of the final printed label prior to release of the product for shipment.

If you have any questions concerning this letter, please contact Karen M. Leavy-Munk at (703)-305-6966.

Sincerely yours,



Marion J. Johnson
Product Manager (31)
Antimicrobial Program Branch
Registration Division (7505C)

CONCURRENCES

SYMBOL							
SURNAME							
DATE							

293

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS**

DANGER

KEEP OUT OF REACH OF CHILDREN

Corrosive. Causes irreversible eye damage. Causes skin irritation. Harmful if inhaled. Harmful if swallowed. Harmful if absorbed through skin. May cause allergic skin reaction. Causes asthmatic signs and symptoms in hyper-reactive individuals. Do not get in eyes, on skin, on clothing. Avoid breathing vapor. Do not swallow. Wear goggles, protective clothing, and rubber gloves. Wash thoroughly with soap and water after handling. Remove contaminated clothing and wash before reuse.

ENVIRONMENTAL HAZARDS

This pesticide is toxic to fish. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

STORAGE AND HANDLING


PIROR® B25 Slimecide solutions are incompatible with many commonly used materials of construction such as steel, galvanized iron, aluminum, tin, and zinc. These solutions can be stored and handled in baked phenolic-lined steel, polyethylene, stainless steel, or reinforced epoxy-plastic equipment. This product freezes at about 14°F (-10°C). Therefore, unless the storage tank is inside or underground, heating and insulation may be required. If heating is needed, exposure to high temperatures should be avoided. For short storage times (up to about 1 month), temperatures of up to 100°F (37.8°C) can be tolerated but the preferred maximum storage temperature is about 80°F (26.7°C). A stainless steel centrifugal pump is suggested for transfer service. Spiral wound stainless steel with TEFLON® is suitable for gaskets and packing.

LIMITED WARRANTY AND DISCLAIMER

The manufacturer warrants (a) that this product conforms to the chemical description on the label, (b) that this product is reasonably fit for the purposes set forth in the directions for use when it is used in accordance with such directions; and (c) that the directions, warnings and other statements on this label are based upon responsible experts' evaluation of reasonable tests of effectiveness and of toxicity to laboratory animals. Tests have not been made on all varieties or in all states or under all conditions. THE MANUFACTURER NEITHER MAKES NOR INTENDS, NOR DOES IT AUTHORIZE ANY AGENT OR REPRESENTATIVE TO MAKE, ANY OTHER WARRANTIES, EXPRESSED OR IMPLIED, AND IT EXPRESSLY EXCLUDES AND DISCLAIMS ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR PARTICULAR PURPOSE. This warranty does not extend to, and the Buyer shall be solely responsible for, any and all loss or damage which results from the use of the product in any manner which is inconsistent with the label directions, warnings or cautions.

BUYER'S EXCLUSIVE REMEDY AND MANUFACTURER'S OR SELLER'S EXCLUSIVE LIABILITY FOR ANY AND ALL CLAIMS, LOSSES, DAMAGES, OR INJURIES RESULTING FROM THE USE OR HANDLING OF THIS PRODUCT, WHETHER OR NOT SUCH LIABILITY IS BASED IN CONTRACT, NEGLIGENCE, STRICT LIABILITY IN TORT OR OTHERWISE, SHALL BE LIMITED, AT THE MANUFACTURER'S OPTION, TO REPLACEMENT OF, OR THE REPAYMENT OF THE PURCHASE PRICE FOR, THE QUANTITY OF PRODUCT WITH RESPECT TO WHICH DAMAGES ARE CLAIMED. IN NO EVENT SHALL MANUFACTURER OR SELLER BE LIABLE FOR SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES RESULTING FROM THE USE OR HANDLING OF THIS PRODUCT.

**BEFORE HANDLING OR USING, READ AND UNDERSTAND
CURRENT UNION CARBIDE MATERIAL SAFETY DATA
SHEET FOR THIS PRODUCT.**

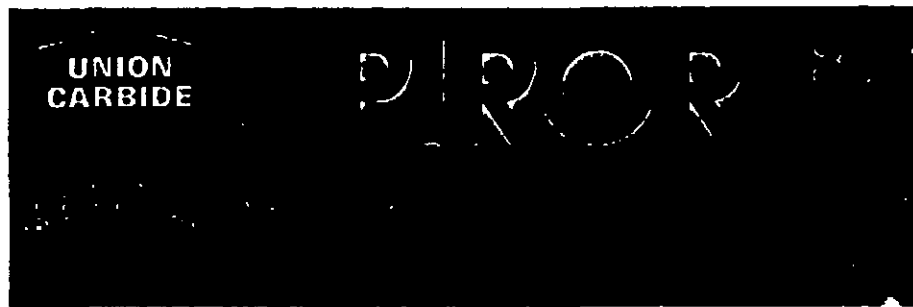

Active Ingredient: Glutaraldehyde 25.0%
Inert Ingredients: 75.0%
100.0%

**KEEP OUT OF REACH OF CHILDREN
DANGER**

STATEMENT OF PRACTICAL TREATMENT

IF IN EYES: Immediately flush with plenty of water for at least 15 minutes. Get immediate medical attention.
IF ON SKIN: Wash with plenty of soap and water. Get medical attention.
IF INHALED: Remove to fresh air. If breathing is difficult, administer oxygen. If symptoms persist, get medical attention.
IF SWALLOWED: DO NOT INDUCE VOMITING. Do not give anything to drink. Seek medical attention immediately.
NOTE TO PHYSICIAN: Aspiration may cause lung damage. Probable mucosal damage may contraindicate use of gastric lavage.

**SEE SIDE PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS
UNION CARBIDE CORPORATION**

39 Old Ridgebury Road • Danbury, CT 06817-0001
EPA Reg No 10352-41
PIROR is a registered trademark
of Union Carbide
Net Contents 5 or 55 gallons

EPA Est. No.
UCC-L72

72118 PRODUCT CODE	CONTAINER SIZE	CONTAINER SIZE
	5 GALLONS	55 GALLONS
	46 POUNDS	509 POUNDS
	NET WEIGHT	NET WEIGHT

**EMERGENCY CONTACT (24 HOURS PER DAY): IN USA 1-800-UCC-HELP (1-800-828-4253)
OUTSIDE USA 01-304-744-3488**

393

MENTS


ESTIC ANIMALS

CHILDREN

ation. Harmful if inhaled.
causes allergic skin reaction.
duals

RDS

duct into lakes, streams, ponds,
ents of a National Pollutant
ly has been notified in writing
wer systems without previously
t your State Water Board or

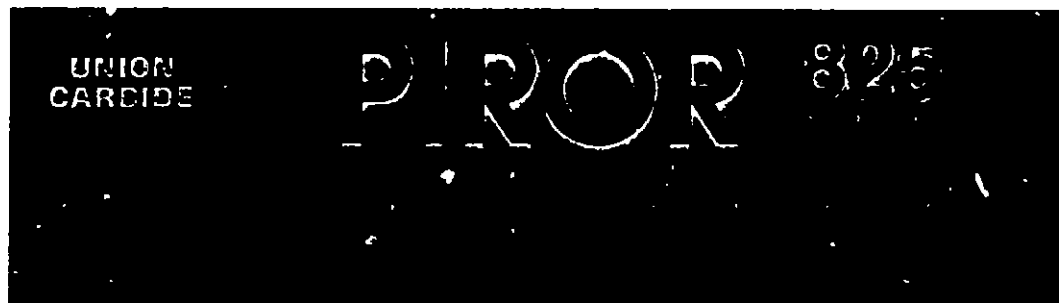

Active Ingredient: Glutaraldehyde 25.0%

Inert Ingredients: 75.0%

100.0%

KEEP OUT OF REACH OF CHILDREN

DANGER

STATEMENT OF PRACTICAL TREATMENT

IF IN EYES: Immediately flush with plenty of water for at least 15 minutes. Get immediate medical attention.

IF ON SKIN: Wash with plenty of soap and water. Get medical attention.

IF INHALED: Remove to fresh air. If breathing is difficult, administer oxygen. If symptoms persist, call a physician.

IF SWALLOWED: DO NOT INDUCE VOMITING. Do not give anything to drink. Seek medical advice with urgency.

NOTE TO PHYSICIAN: Aspiration may cause lung damage. Probable mucosal damage may contraindicate the use of gastric lavage.

SEE SIDE PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS.

UNION CARBIDE CORPORATION

39 Old Ridgebury Road • Danbury, CT 06817-0001
EPA Reg. No. 10352-41
PIROR is a registered trademark
of Union Carbide
Net Contents 5 or 55 gallons

EPA Est. No. 10352-WV-2
UCC-L72118 (A 04/94)
Made In USA
PE0494

72118 PRODUCT CODE	CONTAINER SIZE	CONTAINER SIZE
	5 GALLONS	55 GALLONS
46 POUNDS NET WEIGHT	500 POUNDS NET WEIGHT	

EMERGENCY CONTACT (24 HOURS PER DAY): IN USA 1-800-UCC-HELP (1-800-822-4357)
OUTSIDE USA 01-304-744-3487

DIRECTIONS FOR USE

GENERAL CLASSIFICATION

It is a violation of Federal law to use this product in a manner inconsistent with its

PAPER MILLS AND PAPER MILL PROCESS WATER SYSTEMS

PIROR® 825 Silmicide should be added to a paper making system at a point of uniform flow, such as the beaters, broke chest pump, save-all tank, or white-water tank.

Initial Dose: When the system is noticeably contaminated, add 1.0 to 6.0 lbs of PIROR Silmicide per ton of pulp or paper (dry basis) as a slug dose. Repeat until control is achieved. Fouled systems should be boiled out prior to initial treatment.

Subsequent Dose: When microbial control is evident, add 0.6 to 4.0 lbs of PIROR® per ton of pulp or paper (dry basis) as a slug dose as necessary to maintain control.

PIGMENTS AND FILLER SLURRIES FOR PAPER AND PAPERBOARD

Add sufficient quantities of PIROR® 825 Silmicide to produce a concentration of 200 ppm based on slurry solids.

WATER BASED COATINGS

NOTE: For use in non-food contact coatings only.

Add sufficient quantities of PIROR® 825 Silmicide to produce a concentration of 200 ppm based on slurry solids.

NG

sed materials of construction
an be stored and handled in
xy plastic equipment. This
is inside or underground.
high temperatures should be
up to 100°F (37.8°C) can be
(6.7°C).
wound stainless steel with

AIMER

cal description on the label, (b)
ions for use when it is used in
d other statements on the label
effectiveness and of toxicity to
tes or under all conditions. THE
AUTHORIZE ANY AGENT OR
ESSED OR IMPLIED, AND IT
TIES OF MERCHANTABILITY
extend to, and the Buyer shall
n the use of this product in any
ts

LER'S EXCLUSIVE LIABILITY
ULTING FROM THE USE OR
TY IS BASED IN CONTRACT,
HALL BE LIMITED, AT THE
LYMENT OF THE PURCHASE
CH DAMAGES ARE CLAIMED
OR SPECIAL, INDIRECT OR
LING OF THIS PRODUCT.

ND UNDERSTAND
SAFETY DATA
CT.

STORAGE AND DISPOSAL

PESTICIDE DISPOSAL: Do not contaminate water, food or feed by storage or disposal. Pesticide wastes are toxic. Improper disposal of excess pesticide, spray material, or empty containers is prohibited. If these wastes cannot be disposed of by use according to label directions, contact your State Pesticide or your Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

CONTAINER DISPOSAL: Metal Containers or Plastic Containers: Triple rinse (or equivalent) and offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or other approved by state and local authorities. Plastic Containers: May be incinerated, or if approved by state and local authorities, by burning. If burned, stay out of smoke. Metal Containers: Must be incinerated. Do not cut or weld on or near metal containers.

ACCEPTED
with COMMENTS
In EPA Letter # 94-10

MAY 8 1995

10352-41