

**PRECAUTIONARY STATEMENTS  
HAZARDS TO HUMANS AND DOMESTIC ANIMALS**

**DANGER  
KEEP OUT OF REACH OF CHILDREN**

Corrosive. Causes irreversible eye damage. Causes skin burns. Harmful if inhaled. May be fatal if swallowed; harmful if absorbed through skin. Prolonged or frequently repeated skin contact may cause allergic skin reactions in some individuals. Causes asthmatic signs and symptoms in hyper-reactive individuals. Do not get in eyes, on skin, on clothing. Avoid breathing vapor. Do not swallow. Wear goggles, protective clothing, and polyethylene, butyl or nitrile gloves. Wash thoroughly with soap and water after handling. Remove contaminated clothing and wash before reuse.

**PHYSICAL AND CHEMICAL HAZARDS**

Extremely Flammable! Keep away from heat, sparks and open flame.

**ENVIRONMENTAL HAZARDS**

This pesticide is toxic to fish. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

**STORAGE AND HANDLING**


UCARCIDE® 130 LT Antimicrobial solutions are incompatible with many commonly used materials of construction such as steel, galvanized iron, aluminum, tin, and zinc. These solutions can be stored and handled in baked phenolic-lined steel, polyethylene, stainless steel, or reinforced epoxy-plastic equipment. This product freezes at about -45.4°F (-43°C). Therefore, unless the storage tank is inside or underground, heating and insulation may be required. If heating is needed, exposure to high temperatures should be avoided. For short storage times (up to about 1 month), temperatures of up to 100°F (37.8°C) can be tolerated but the preferred maximum storage temperature is about 80°F (28.7°C). A stainless steel centrifugal pump is suggested for transfer service. Spiral wound stainless steel with TEFLON® is suitable for gaskets and packing.

**LIMITED WARRANTY AND DISCLAIMER**

The manufacturer warrants (a) that this product conforms to the chemical description on the label; (b) that this product is reasonably fit for the purposes set forth in the directions for use when it is used in accordance with such directions; and (c) that the directions, warnings and other statements on this label are based upon responsible experts' evaluation of reasonable tests of effectiveness and of toxicity to laboratory animals. Tests have not been made on all varieties or in all states or under all conditions. THE MANUFACTURER NEITHER MAKES NOR INTENDS, NOR DOES IT AUTHORIZE ANY AGENT OR REPRESENTATIVE TO MAKE, ANY OTHER WARRANTIES, EXPRESSED OR IMPLIED, AND IT EXPRESSLY EXCLUDES AND DISCLAIMS ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR PARTICULAR PURPOSE. This warranty does not extend to, and the Buyer shall be solely responsible for, any and all loss or damage which results from the use of this product in any manner which is inconsistent with the label directions, warnings or cautions.

BUYER'S EXCLUSIVE REMEDY AND MANUFACTURER'S OR SELLER'S EXCLUSIVE LIABILITY FOR ANY AND ALL CLAIMS, LOSSES, DAMAGES, OR INJURIES RESULTING FROM THE USE OR HANDLING OF THIS PRODUCT, WHETHER OR NOT SUCH LIABILITY IS BASED IN CONTRACT, NEGLIGENCE, STRICT LIABILITY IN TORT OR OTHERWISE, SHALL BE LIMITED, AT THE MANUFACTURER'S OPTION, TO REPLACEMENT OF, OR THE REPAYMENT OF THE PURCHASE PRICE FOR, THE QUANTITY OF PRODUCT WITH RESPECT TO WHICH DAMAGES ARE CLAIMED. IN NO EVENT SHALL MANUFACTURER OR SELLER BE LIABLE FOR SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES RESULTING FROM THE USE OR HANDLING OF THIS PRODUCT.

**BEFORE HANDLING OR USING, READ AND UNDERSTAND  
CURRENT UNION CARBIDE MATERIAL SAFETY DATA  
SHEET FOR THIS PRODUCT.**

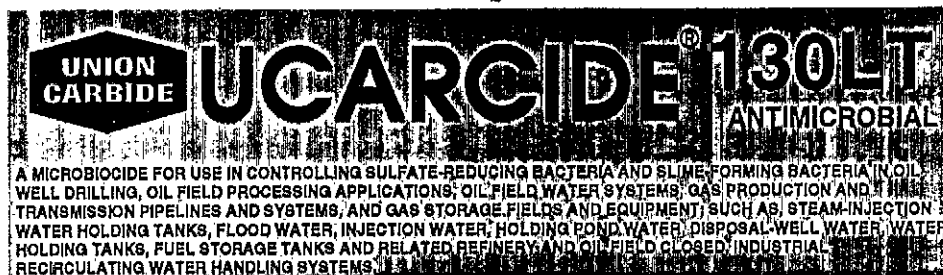

Active Ingredient: Glutaraldehyde ..... 30.0%

Inert Ingredients: ..... 70.0%  
100.0%

**KEEP OUT OF REACH OF CHILDREN  
DANGER**

**STATEMENT OF PRACTICAL TREATMENT**

**IF IN EYES:** Immediately flush with plenty of water for at least 15 minutes. Do not remove contact lenses, if worn. Get immediate medical attention.

**IF ON SKIN:** Immediately wash with plenty of soap and water. Get medical attention.

**IF INHALED:** Remove to fresh air. If breathing is difficult, administer oxygen. If symptoms persist, call a physician.

**IF SWALLOWED: DO NOT INDUCE VOMITING.** Do not give anything to drink. Seek medical advice with urgency.

**NOTE TO PHYSICIAN:** Aspiration may cause lung damage. Probable mucosal damage may contraindicate the use of gastric lavage.

SEE SIDE PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS.

**UNION CARBIDE CORPORATION**

39 Old Ridgebury Road • Danbury, CT 06817-0001  
EPA Reg. No. 10352-52  
UCARCIDE is a registered trademark  
of Union Carbide  
Net Contents 55 gallons

EPA Est. No. 10352-WV-2  
UCC-L90267 (B/98)  
Made In USA  
PE0298

90267	CONTAINER SIZE	SHIPPING NAME	FLAMMABLE LIQUID, CORROSIVE, H.O.S. (CONTAINS ACETONE, GLUTARALDEHYDE)	
	55 GALLONS		ID NUMBER	PC:IF
PRODUCT CODE	448 POUNDS	HAZARD CLASS	UN 2023	
NET WEIGHT				

**EMERGENCY CONTACT (24 HOURS PER DAY): IN USA 1-800-UCC-HELP (1-800-822-4357)  
OUTSIDE USA 01-304-744-3487**

**MAR 26 1998**

Under the Federal Insecticide, Fungicide, and Rodenticide Act as amended, for the pesticide, registered under EPA Reg. No. 10352-52

PM 33 10352-52 3-26-98 1072

## DIRECTIONS FOR USE

### GENERAL CLASSIFICATION

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

### WATER FLOODS

UCARCIDE® 130 LT Antimicrobial should be added to a water flood system at a point of uniform mixing.

**Initial Treatment:** When the system is noticeably contaminated, add 167 to 8333 ppm UCARCIDE® 130 LT Antimicrobial to the system (0.2 to 8.3 gallons UCARCIDE® 130 LT Antimicrobial per 1000 gallons flood water). Repeat until control is achieved.

**Subsequent Dose:** When microbial control is evident, add 33 to 8333 ppm UCARCIDE® 130 LT Antimicrobial (0.03 to 8.3 gallons UCARCIDE® 130 LT Antimicrobial per 1000 gallons flood water) to the system weekly, or as needed to maintain control.

### DRILLING, COMPLETION, AND WORKOVER FLUIDS

UCARCIDE® 130 LT Antimicrobial should be added to a drilling fluid system at a point of uniform mixing such as the circulating mud tank.

**Initial Treatment:** Add 90 to 1665 ppm UCARCIDE® 130 LT Antimicrobial (0.38 to 7.0 gallons UCARCIDE® 130 LT Antimicrobial per 100 barrels of fluid) to a freshly prepared fluid depending on the severity of contamination.

**Maintenance Dosage:** Maintain a concentration of 90 to 1665 ppm UCARCIDE® 130 LT Antimicrobial by adding 0.38 to 7.0 gallons of UCARCIDE® 130 LT Antimicrobial per 100 barrels of additional fluid, or as needed, depending on the severity of contamination.

### PACKER FLUIDS

UCARCIDE® 130 LT Antimicrobial should be added to a packer fluid at a point of uniform mixing such as a circulating holding tank. Add 90 to 1005 ppm UCARCIDE® 130 LT Antimicrobial (0.38 to 4.2 gallons UCARCIDE® 130 LT Antimicrobial per 100 barrels of fluid) to a freshly prepared fluid depending on the severity of contamination. Seal the treated packer fluid in the wall between the casing and production tube.

### GAS PRODUCTION AND TRANSMISSION PIPELINES AND SYSTEMS

UCARCIDE® 130 LT Antimicrobial should be added to a gas production or transmission pipeline via direct injection. The application should be conducted to ensure maximum distribution of the UCARCIDE® 130 LT Antimicrobial through the entire internal surface of the pipeline. To facilitate application, it may be desirable to dilute the UCARCIDE® 130 LT Antimicrobial with an appropriate solvent immediately before use. Injections to the system should be weekly, or as needed to maintain control.

### GAS STORAGE WELLS AND SYSTEMS

Individual injection wells should be treated with a sufficient quantity of UCARCIDE® 130 LT Antimicrobial to produce a concentration of 840 to 8340 ppm UCARCIDE® 130 LT Antimicrobial when diluted by the water present in the formation. Injection should take place before gas is injected (during the summer). Injections should be repeated yearly, or as needed to maintain control.

Individual drips should be treated with a sufficient quantity of UCARCIDE® 130 LT Antimicrobial to produce a concentration of 330 to 3330 ppm UCARCIDE® 130 LT Antimicrobial when diluted by the water present in the drip. Injections should be repeated yearly, or as needed to maintain control.

### HYDROTESTING

Water used to hydrotest pipelines or vessels should contain 186 to 6680 ppm UCARCIDE® 130 LT Antimicrobial (0.17 to 6.7 gallons UCARCIDE® 130 LT Antimicrobial per 1000 gallons water), depending on water quality and length of time the equipment will remain idle.

### PIPELINE PIGGING AND SCRAPING OPERATIONS

Add UCARCIDE® 130 LT Antimicrobial to a slug of water immediately following the scraper (ideally this water volume can be kept to a minimum and contained between the scraper and a trailing pig). Sufficient UCARCIDE® 130 LT Antimicrobial should be added to produce a concentration of 0.15 to 1.7% (0.15 to 1.7 gallons UCARCIDE® 130 LT Antimicrobial per 100 gallons water), depending on the length of the pipeline and the severity of biotailing.

## STORAGE AND DISPOSAL

**PESTICIDE DISPOSAL:** Do not contaminate water, food or feed by storage or disposal. Open dumping is prohibited. Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture or residue is a violation of Federal law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or your Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

**CONTAINER DISPOSAL:** Metal Containers or Plastic Containers: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or other procedure approved by state and local authorities. Plastic Containers: May be incinerated, or, if allowed by state and local authorities, by burning. If burned, stay out of smoke. Metal Containers: Must not be incinerated. Do not cut or weld on or near metal containers.