




A Baker Hughes company

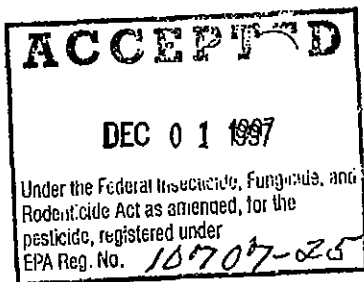

MAGNACIDE® G 100

ACTIVE INGREDIENT:

Potassium dimethyldithiocarbamate 20.0%
INERT INGREDIENTS 80.0%

This product contains 1.82 lb. of active ingredient per gallon and weighs 9.14 lb. per gallon.

DANGER
KEEP OUT OF REACH OF CHILDREN

PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS

DANGER: Corrosive. Causes eye damage and skin damage. Harmful if swallowed. Do not get in eyes, on skin, or on clothing. Avoid contamination of food. Wear goggles or face shield and rubber gloves when handling. Wash thoroughly after handling.

STATEMENT OF PRACTICAL TREATMENT: *In case of skin contact*, wash with plenty of soap and water. Remove contaminated clothing and wash before reuse. *If product gets in the eyes*, flush immediately with copious amounts of clean, cool water for at least 15 minutes. Get medical attention immediately. *If product is swallowed*, promptly drink 1 or 2 glasses of water. Contact a physician or Poison Control Center immediately. **DO NOT INDUCE VOMITING.**
Note to physician. Probable mucosal damage may contraindicate gastric lavage.

ENVIRONMENTAL HAZARDS: This pesticide is toxic to fish. Do not apply to marine and/or estuarine oil fields. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA. Replace logo with new BPC logo.

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

MAGNACIDE G100 is used in cooling water systems and industrial air-washing systems to control microbiological slime. In cooling systems, add 2.9 to 8.6 fl. oz. of MAGNACIDE G100 per 1000 gal. of water to the cooling tower sump. In air-washing systems, add 10 to 17.2 fl. oz. of MAGNACIDE G100 per 1000 gal. of water to water-collection trays. Repeat treatments every 1-5 days, or as needed. The required frequency depends on relative amount of bleed and severity of slime problem.

MAGNACIDE G100 is used to control sulfate-reducing bacteria in petroleum secondary recovery waterflooding operations at dosages of 2.38 to 4.76 fl. oz. of MAGNACIDE G100 per 1000 gal. of water treated. Technical assistance in applying MAGNACIDE G100 to a particular secondary recovery system is available upon request when a description of the problem is provided.

STORAGE AND DISPOSAL

PROHIBITIONS: Do not contaminate water, food, or feed by storage or disposal.

STORAGE: Do not expose to extreme temperatures. Do not stack more than four drums high. Leaking or damaged drums should be placed in overpack drums for disposal. Spills should be absorbed in sawdust or sand and disposed of in a sanitary landfill. Keep container closed when not in use.

PESTICIDE DISPOSAL: Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at your EPA Regional Office for guidance.

CONTAINER DISPOSAL:

- METAL: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.
- PLASTIC: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or incineration, or, if allowed by state and local authorities, by burning. If burned, stay out of smoke.

GENERAL: Consult Federal, State, or Local disposal authorities for approved alternative procedures.

MANUFACTURED BY:
BAKER PETROLITE CORPORATION
3900 Essex Lane, Houston, TX 77027

EPA REG. NO. 10707-25

EPA EST. NO. 10707-TX-003

NET CONTENTS _____

Page 1 of 1
10707-25
12/1/97