

**BAKER**


**PETROLITE**

CHEMTEC: 800-424-9300  
CANUTEC: 613-996-6666  
Customer Care: 800-231-3606

# X-CIDE® 320

ACCEPTED

SEP 09 1998

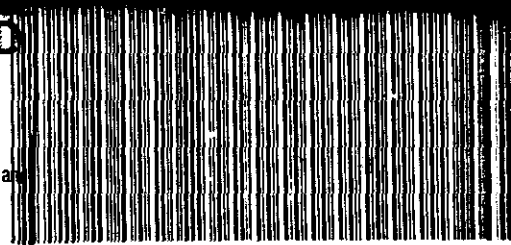

PM33

A Baker Hughes company  
Baker Petrolite Corp.  
3900 Essex Lane  
Houston, TX 77027-5133 U.S.A.

## PRECAUTIONARY STATEMENTS

### HAZARDS TO HUMANS AND DOMESTIC ANIMALS

**DANGER:** Corrosive. Causes eye damage and skin irritation. Do not get in eyes, on skin or on clothing. Wear goggles or face shield and rubber gloves when handling. Harmful or fatal if swallowed. Avoid contamination of food.

### ENVIRONMENTAL HAZARDS

This pesticide is toxic to fish and wildlife. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

### PHYSICAL OR CHEMICAL HAZARDS

**FLAMMABLE**--Keep away from heat and flame.

### STATEMENT OF PRACTICAL TREATMENT

In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes. For eyes, call a physician. Remove and wash contaminated clothing before reuse. If swallowed, drink promptly a large quantity of milk, egg whites, gelatin solution or, if these are not available, drink large quantities of water. Avoid alcohol. Call a physician immediately.

### NOTE TO PHYSICIAN

Probable mucosal damage may contraindicate the use of gastric lavage. Measures against circulatory shock, respiratory depression and convulsion may be needed.

# X-CIDE® 320

## Industrial Bactericide

FOR USE IN INDUSTRIAL PROCESSES ONLY. NOT FOR DOMESTIC USE.

### ACTIVE INGREDIENTS:

Alkyl\*-1,3 propylene diamine acetates..... 42.41%

INERT INGREDIENTS:..... 57.59%

100.00%

\*Alkyl as derived from coconut oil fatty acids.

**KEEP OUT OF REACH OF CHILDREN**  
**DANGER**

SEE SIDE COLUMNS FOR ADDITIONAL PRECAUTIONARY STATEMENTS



EPA REG. NO. 10767-47  
EPA EST. NO. 10767-TX-008

### DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

For use with closed delivery systems only.

**OILFIELD AND PETROCHEMICAL SYSTEMS:** X-CIDE 320 Industrial Bactericide may be used either in slug treatment or in continuous application. Dosages may vary from 500 ppm of X-CIDE 320 Industrial Bactericide in slug application to 30-50 ppm of X-CIDE 320 Industrial Bactericide in continuous treatment (1/4 pint per 1000 gallons equals approximately 30 ppm.) A typical slug treatment is to add 125 ppm of X-CIDE 320 Industrial Bactericide (1 pint per 1000 gallons of water) at intervals as needed to prevent growth of bacterial slime. Badly fouled systems may be slug treated to establish control, followed by continuous treatment of 30-50 ppm (1/4 to 1/2 pints per 1000 gallons of water) to maintain control.

### STORAGE AND DISPOSAL

**STORAGE:** Do not contaminate water, food or feed by storage or disposal. Do not use, pour, spill or store near heat or open flame.  
**PESTICIDE DISPOSAL:** Pesticide wastes are acutely hazardous. Improper disposal of excess biocide or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste Representative at the nearest EPA Regional Office for guidance.  
**CONTAINER DISPOSAL:** Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

Net Contents 55 U. S. Gallons at 60° F

10707-47

9/9/98

11

Read Product Material Safety Data Sheet prior to use. PRODUCT WARRANTY, DISCLAIMER AND LIMITATION OF LIABILITY ARE FOUND THEREON. Use of Product signifies agreement with these provisions.

Lea la hoja de datos de seguridad de materiales del producto antes de usarlo. LA GARANTIA DEL PRODUCTO, EL DESCARGO Y LA LIMITACION DE RESPONSABILIDAD SE ENCUENTRAN EN DICHS DOCUMENTOS. El uso del producto significa acuerdo con estas disposiciones.

Affix Flammable (3) label Affix Corrosive Label

Flammable liquid, corrosive, n.o.s. (contains Isopropanol and Alkyl-1,3propylene diamine acetates) UN2924

320-5-98