

EVANS

PRODUCE WITH PRIDE

EVANS
**CLEAR WOOD
PRESERVATIVE**



ONE U.S. GALLON
3.785 LITERS


KEEP OUT OF REACH OF CHILDREN

WARNING

SEE BACK PANEL FOR PRECAUTIONARY STATEMENTS.

04-48003

CLEAR WOOD PRESERVATIVE

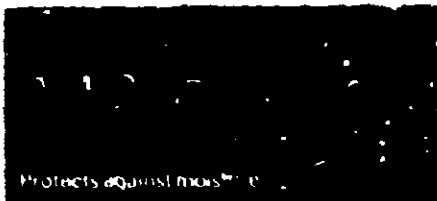

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS AND DOMESTIC ANIMALS

WARNING

CONTAINS PETROLEUM DISTILLATE

- HARMFUL IF SWALLOWED. may be absorbed through skin. Causes skin irritation. Avoid breathing vapor or spray mist. Do not get in eyes, on skin, or on clothing.
- **First Aid Statement:** If swallowed, do not induce vomiting. Call a physician immediately. In case of contact, immediately flush eyes or skin with plenty of water. Get medical attention if irritation persists.

Note: Wear goggles, rubber gloves and protective clothing when applying or handling treated lumber.

ENVIRONMENTAL HAZARDS

This product is toxic to fish. Keep out of lakes, streams or ponds. Do not contaminate water by cleaning of equipment or disposal of wastes.

PHYSICAL OR CHEMICAL HAZARDS

COMBUSTIBLE Keep away from heat, sparks or open flame. Use with adequate ventilation.

DIRECTIONS FOR USE

IT IS A VIOLATION OF FEDERAL LAW TO USE THIS PRODUCT IN A MANNER INCONSISTENT WITH ITS LABELING.

STORAGE AND DISPOSAL

Do not reuse empty container. Wrap container and put in trash collection.

EVANS CLEAR WOOD PRESERVATIVE (WATER REPELLENT TYPE) 48003

Protects against the natural enemies of wood — moisture, rot and mildew. This product will protect, seal and beautify all the natural wood surfaces around your home. Retards warping, swelling, shrinking and checking.

NOTE

Do not use on wood which will come in contact with food. Do not use on wood which will come in continuous contact with water unless the wood is sealed with paint, varnish or another finish after treatment.

WHERE TO USE

Recommended for use on millwork, plywood, decks, outdoor furniture, structural lumber, fences, trellises, shingles, siding — all exterior wood that is in contact with moisture. An ideal first coat prior to topcoating with paint or varnish. May be used as a water repellent finish over a stain coating.

APPLICATION

For proper penetration, wood must be clean and dry. Apply by brush, roller, spray or dipping. If immersion is impractical, apply a second liberal coat within one hour of the first coat.

COVERAGE

Approximately 100-300 square feet per gallon, depending upon method of application and porosity of wood being treated.

CLEAN-UP

Clean equipment promptly with mineral spirits.

ACCEPTED

APR 13 1981

Insecticide,
Rodenticide Act,
Fungicide,
10552-9

31