

aqua-serv (... gineers, inc.

2431 East 56th Street, Los Angeles, CA 90058 • (213) 582 8246

EPA EST NO 10932 CA 1

EPA REG. NO. 10932-18

PRECAUTIONARY STATEMENTS


HAZARDOUS TO HUMANS AND DOMESTIC ANIMALS

CAUTION: Harmful if swallowed. Avoid breathing vapors. Avoid contact with skin, eyes, or clothing.

ENVIRONMENTAL HAZARDS: This pesticide is toxic to fish. Keep out of lakes, streams or ponds. Permits maybe required for discharge containing this pesticide into lakes, streams, ponds, or public water. For guidance, contact the regional office of the Environmental Protection Agency.

WARRANTY

Seller's guarantee shall be limited to the terms of the label, and subject thereto. The buyer assumes any risk to persons or property arising out of use or handling and accepts the product on these conditions.

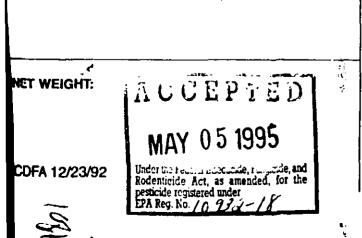

7618

A SPECIALIZED FORMULATION OF ORGANIC SCALE AND CORROSION INHIBITORS CONTAIN-ING A MICROBIOCIDE FOR USE IN CONTROL-LING ALGAE AND BACTERIA IN COM-MERCIAL AND INDUSTRIAL RECIRCULATING WATER COOLING TOWERS AND INDUSTRIAL AIRWASHING SYSTEMS. THIS PRODUCT IS SFECIFICALLY DESIGNED AS A COMPLETE ALL-IN-ONE LIQUID TREATMENT PROGRAM.

ACTIVE INGREDIENTS.

This product contains 0.43 lbs. of active ingredient per gallon and weighs 8.71 lbs. per gallon.

KEEP OUT OF REACH OF CHILDREN

CAUTION

If Swallowed- Rinse mouth with copious amounts
of water then drink promptly a large
quantity of water. Do not induce
vomiting. Avoid alcohol. Get med-
ical attention.If Ir. Eyes- Frush with plenty of water for 15

minutes. Get medical attention.

water. Get medical attention if irritation persists

SEE SIDE PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

7618 is used to control scale, corrosion, algae, and bacteria in recirculating commercial and industrial water cooling towers. Prior to its use, systems must be cleaned to remove algal growth, microbiological slime, and other deposits. An initial slug addition of 12 to 30 fluid ounces of 7618 per 1000 gallons of water to provide a concentration of 96 to 240 parts per million of 7618, based on the total weight of water in the system, is recommended. Repeat initial dosage until control is evident.

Subsequent slug additions of 3.0 to 30 fluid ounces of 7618 per 1000 gallons of water (24 to 240 parts per million of 7618) should be employed every 2 to 5 days, or as needed. The frequency of addition depends upon the relative amount of bleedoff and the severity of the microbiological problem. Slug additions should be made in the sump of water cooling towers.

CONTINUOUS FEED METHOD

INITIAL DOSE:

SUBSEQUENT DOSE:

When the system is noticeably fouled, apply 12 to 30 fluid ounces of 7618 per 1000 gallons of water used in the system.

> When microbial control is evident, add 3.0 to 30 fluid ounces of 7618 per 1000 gallons of water used in the system per day.

7618 is used to contrc teria in industrial airwa effective mist eliminati use, systems should b rial slime and other dej 44.4 to 74.1 fluid ounc of water is recommer until control is evident. of 30.3 to 74.1 fluid ou lons of water should days, or as needed. depends upon the rela severity of the bacter may be made to the s tion trays of the airwas

STOPAGE /

Do not contaminate w age or disposal.

STORAGE: Do not st high. Leaking or dai placed in overpack (should be absorbed in posed of in a sanita closed when not in use

PESTICIDE DISPOSA the use of this product or at an approved wast

CONTAINER DISPOSI

PLASTIC: Triple-rinse for recycling or recon dispose of in a sanita or, if allowed by state burning. If burned, stay

METAL: Triple rinse (for recycling or recondispose of in a sanitar, dures approved by stat