


FRONT PANEL

**OTHER FINE
WATCO PRODUCTS**
For Wood: Danish
 Oil Finish • Teak Oil
 Finish • Exterior
 Wood Finish • Wood
 Floor Finish • Red-
 wood Finish • Marine
 Teakwood Finish •
 Marine Wood Finish
 • Satin Oil • Satin
 Wax
For Masonry: The S
 Brick Sealer



A special penetrating oil-resin sealer-finish for exterior woods such as decks, siding, fences and trim.

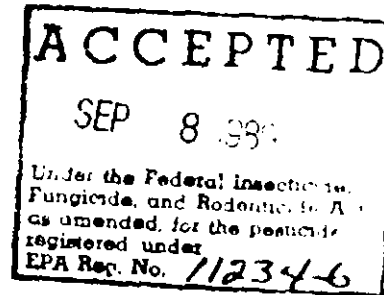

Active Ingredient:

3-Iodo-2-Propynyl Butyl Carbamate 0.50%

Inert Ingredients..... 99.50%

Total 100.00%

KEEP OUT OF REACH OF CHILDREN

CAUTION

(Read Additional Precautionary Statements on Side Panels)

E.P.A. Reg. No. 11234 -

E.P.A. Est. No.

NET CONTENTS:

Weight/Gal. : lbs/gal

Manufactured by
 Watco-Dennis Corporation - Rancho Dominguez, California 90220

WATCO EXTERIOR WOOD FINISH

PRODUCT DESCRIPTION

For use on unfinished, unsealed or stripped wood surfaces such as millwork, shingles (not asbestos) shakes, clapboards, smooth or rough cut siding, plywood, decks, porches, fences, railings, structural support timbers, flatbeds, cold frames and green-houses. This product is not recommended for use on primed or previously painted surfaces. WATCO EXTERIOR WOOD FINISH helps control fungal rot and mildew.

Do not use for below or ground contact applications requiring preservative qualities. May be used as a booster or adjunct to pressure treated wood where the wood is to be used on the ground's surface (e.g., ornamental or landscape timbers). Do not use on wood that will be in contact with food, feed, potable water or where prolonged skin contact will occur. Due to the presence of petroleum distillates in this product, do not use on lumber that can be used where dairy cattle or livestock can come in contact with the treated wood.

WATCO EXTERIOR WOOD FINISH is an exclusive super-penetrating oil and resin process for wood - not a surface film or coating which can chip or peel, check or wear away. A WATCO finish seals, primes, stabilizes, preserves, protects and hardens wood surfaces up to 25 percent more.

DIRECTIONS FOR USE

It is a violation of federal law to use this product in a manner inconsistent with its label.

APPLICATION DIRECTIONS

DO NOT APPLY IN WET WEATHER OR EXTREME HOT OR COLD TEMPERATURES

- To insure desired results, test product out on an out of view areas first.
- Cut and machine wood prior to treatment if possible. If not apply two coatings of preservative to all joints, cracks, cut-ends, holes or other openings.
- Applying wood finishes often results in splashing or dripping. cover desirable plants and shrubs to protect against possible injury.

BEST AVAILABLE COPY

PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS AND DOMESTIC ANIMALS

CAUTION

CONTAINS PETROLEUM DISTILLATES. Use only with adequate ventilation. Avoid breathing vapors or spray mist. Harmful if swallowed or inhaled. Avoid contact with eyes, skin or clothing. Wear goggles and rubber gloves when handling and rubber gloves and protective clothing when handling freshly treated lumber. Wash thoroughly with soap and water after handling and before smoking or eating. Remove contaminated clothing and wash before reuse.

STATEMENT OF PRACTICAL TREATMENT

IF ON SKIN: Wash with plenty of soap and water. Get medical attention if irritation persists.

IF IN EYES: Flush eyes with plenty of water. Get medical attention if irritation persists.

IF SWALLOWED: Do not induce vomiting. Promptly drink a large quantity of milk, egg whites or gelatin solution. If these are not available, drink large quantities of water. Do not give anything by mouth to an unconscious person. Avoid alcohol. Get immediate medical attention.


IF INHALED: Remove victim to fresh air. If not breathing, give artificial respiration, preferably mouth to mouth. Get medical attention.

ENVIRONMENTAL HAZARDS

This pesticide is toxic to fish. Do not apply directly to water. Do not contaminate water when disposing of equipment washwaters.

CHEMICAL AND PHYSICAL HAZARDS

COMBUSTIBLE: Do not use or store near heat or open flame. In case of fire, use water spray, foam, carbon dioxide or dry chemical.

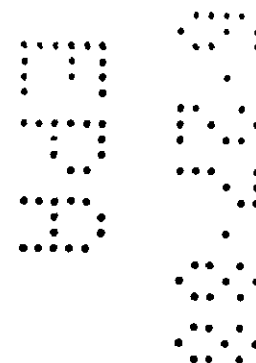

BEST AVAILABLE COPY

1. Be sure wood is dry and free from sub-surface moisture and that all surface coatings such as paint, varnish, etc. are completely removed. Sand if smooth finish is desired.

2. SHAKE CONTAINER THOROUGHLY.

3. Flood on heavy application of WATCO oil with brush, roller or spray. Allow to penetrate for thirty minutes

4. Reapply Watco, allowing an additional 15 minutes penetration. Then wipe or dry roll surface completely.

5. When finished completely immerse all oily cloths in water to avoid spontaneous combustion. Then spread cloths and let dry before disposing. Keep oily cloths away from combustible materials.

6. If additional color strength is desired (more solid color), reapply more WATCO and allow to dry. Lightly wipe or pad off surplus WATCO after about 30 minutes. If wood surface has shiny, tacky areas, dissolve with WATCO and wipe off.

TECHNICAL DATA

COVERAGE: 200 - 300 sq. ft. per gallon. Do not thin.

COLORING: WATCO Exterior finishes are Intermixable. For custom colors, use oil-based colorants, adding not more than six ounces per gallon of WATCO. SHAKE WELL.

SURFACE FINISHING: Surface finishes such as lacquer varnish or urethane may be applied if desired over a WATCO finish after drying 72 hours.

CLEAN-UP: Application tools and brushes may be cleaned with Mineral spirits or primer.

MAINTENANCE: Reapplication of WATCO Exterior Wood Finish to wood appearing dry will restore the beauty and effectiveness of the finish. For best results and uniformity of appearance, retreat once every three years.

The proper use and application of WATCO Products being beyond the control of their exclusive manufacturer, the Watco-Dennis Corporation, and of the seller, no warranty, expressed or implied, is made with respect to results from the use of the products. Responsibility for claims of any kind is limited to purchase price of the material.

BEST AVAILABLE COPY

STORAGE AND DISPOSAL

STORAGE: Keep containers closed tightly when not in use. Do not use or store inside the home. Do not store near excessive heat. Keep away from food and feed.

HOMEOWNER USE

Do not reuse original container. Securely wrap container in several layers of newspaper and discard in trash.

COMMERCIAL USE

PESTICIDE DISPOSAL: Do not contaminate water, food or feed by storage or disposal. Wastes resulting from use of this product may be disposed on site or at an approved waste disposal facility.

CONTAINER DISPOSAL: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill or by other procedures approved by state and local authorities.

BEST AVAILABLE COPY

