

WOODSMAN[®]

SEMI-TRANSPARENT OIL STAIN AND WOOD PRESERVATIVE

OST-4 Black Walnut

- Water Repellent
- Resists Mildew
Rot & Decay

128 FL. OZ. (1 Gallon)

IBM No. 176 828

TRU-TEST

WARNING: KEEP OUT
OF REACH OF CHILDREN.
SEE ADDITIONAL PRECAU-
TIONS ON BACK OF LABEL.


ACTIVE ING
1,2 Bis
sulfony
Bis (Tri
INERT ING

EPA Est. 11
EPA Reg. N

WOODSMAN[®]
SEMI-TRANSPARENT OIL
AND WOOD PRESERVATIVE
ST-4 Black Walnut

RU-TEST

Supreme

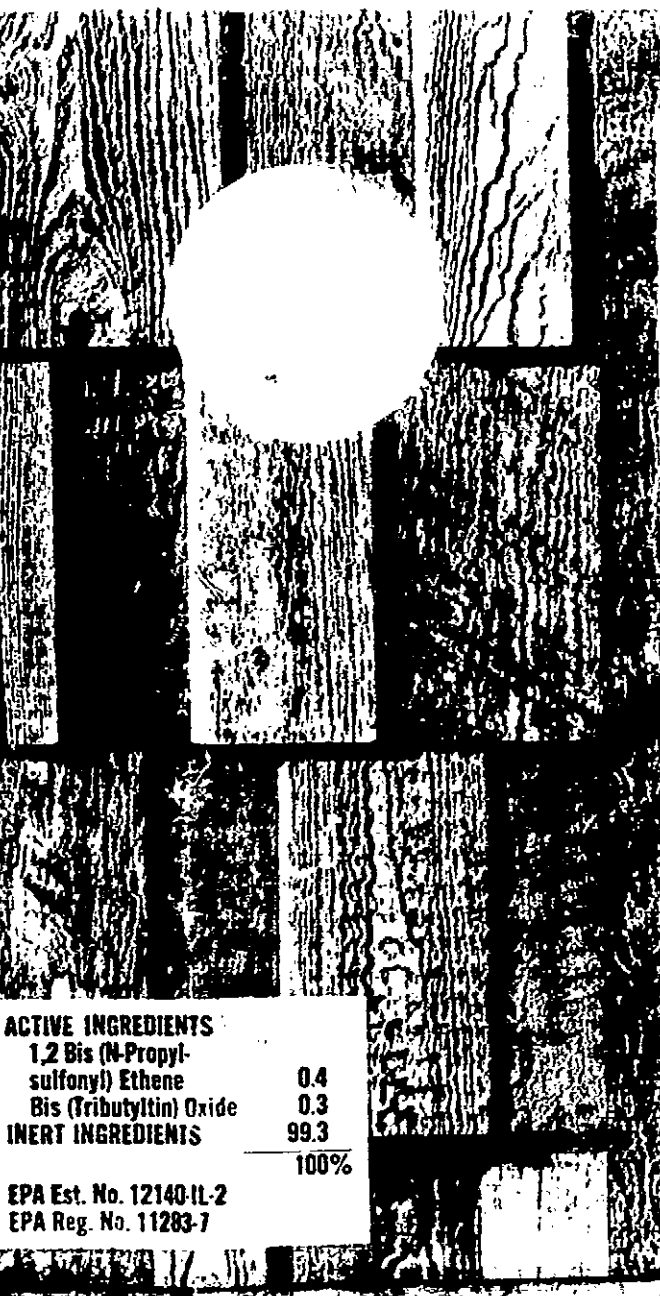

ACTIVE INGREDIENTS	
1,2 Bis (N-Propylsulfonyl) Ethane	0.4
Bis (Tributyltin) Oxide	0.3
INERT INGREDIENTS	99.3
	100%
EPA Est. No. 12140-IL-2	
EPA Reg. No. 11283-7	

- FINISH**
- AVERAGE COVERAGE**
- DRY TIME**
- THINNER**
- APPLICATION**
- PRIMER**
- CLEAN UP**

ST-4 BLACK WALNUT
 ANALYSIS BY WEIGHT

MH-301 1-80
 Sold Only by


GENERAL PAINT & CHEMICAL DIVISION OF COTTER & COMPANY - 100%

SEMI-TRANSPARENT OIL AND WOOD PRESERVATIVE

WOODSMAN SEMI TRANSPARENT OIL STAIN
 is a penetrating oil stain that provides a rich, natural wood finish. It is formulated with a special blend of pigments and preservatives to protect your wood from weathering, rot, and insect damage. The natural wood grain and texture are preserved and enhanced.

DIRECTIONS FOR USE: This is a penetrating oil stain. It is applied with a brush or sprayer. Apply a liberal coat to the surface of the wood. Allow to penetrate for 15-20 minutes. Wipe off the excess with a clean cloth. Allow to dry for 24 hours before applying a second coat. For best results, apply a second coat after 7-10 days.

STORAGE AND DISPOSAL: Store in a cool, dry place. Do not use if the container is damaged. Dispose of any excess material in accordance with local regulations.

HAZARDS TO HUMANS AND DOMESTIC ANIMALS:
WARNING: Irritant. Causes skin and eye irritation. Avoid contact with skin and eyes. Wash thoroughly with soap and water if contact occurs.

CONTAINS PETROLEUM DISTILLATES:
 Flammable liquid and vapor. Keep away from heat, open flames, and other sources of ignition. Do not smoke while using this product.

ENVIRONMENTAL PRECAUTIONS:
 Do not discharge into waterways. Do not use in areas where it may come in contact with water. Do not use in areas where it may come in contact with plants or animals.

Wood Grain and Texture Show

The True Value Supreme Oil Stain

SEMI-TRANSPARENT OIL STAIN AND WOOD PRESERVATIVE

FINISH

Semi-Transparent

AVERAGE COVERAGE

100-200 sq ft - 1st Coat
100-300 sq ft - 2nd Coat

DRY TIME

Allow 12-15 hrs
Between Coats
Thorough drying requires
24 hrs

THINNER

None Required

APPLICATION

Brush, Roller or Spray

PRIMER

None Required

CLEAN UP

Paint Thinner

OST-4 BLACK WALNUT

ANALYSIS BY WEIGHT

PIGMENT	SE :	
Umplblack	10	
Iron Oxide Class I	0.5	
Silicates	4.3	
VEHICLE	94.2	
Seco Alkyd Resin	48	
Linseed Oil	22.3	
Bi-Tributyltin Oxide	0.3	
1,2-Bis-N-Propylsulfonol		
Ethene	0.4	
Driers & Additives	2.8	
Mineral Spirits	63.6	
	100.0	

Less than 5% Tinting Color

MH-301/1-80

Sold Only by



GENERAL PAINT & CHEMICAL CO. DIVISION OF COTTER & COMPANY - 100% MEMBER OWNED CHICAGO, ILLINOIS 60614

WOODSMAN SEMI-TRANSPARENT OIL STAIN AND WOOD PRESERVATIVE is modified to give water repellency, resist rot, decay and mildew. Recommended for use on smooth or rough cut wood siding, shingles, shakes, fences, saw-textured lumber and decks. Not recommended on primed or previously painted surfaces. May be applied to previously stained surfaces of similar or lighter color.

One coat gives full protection, two coats deepens and intensifies the color, on very porous or badly weathered wood a second coat is recommended.

Semi-Transparent Stain coats the surface of the wood as well as penetrates but still allows the wood grain and texture to show. If repainting is ever desired, surface must be well weathered.

DIRECTIONS FOR USE: It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

Surface must be clean, free of dirt, grease and mildew (consult dealer for removing mildew). Mix well before using and stir often during application. Always buy enough stain for the complete job, when applying, inter mix all containers of the same color to assure color uniformity.

APPLICATION: Apply liberally. Cover a small area at a time and keep a wet edge to avoid lap marks. Work in the direction of the siding. Do not stop in the middle of an area; try to work to edges or corners. Avoid direct sunlight when applying, follow shaded side around house if possible. Do not apply before dew has evaporated or immediately before (or after) a rain. Since different woods "take" stains differently, test first on similar type of wood to which stain is to be applied.

STORAGE AND DISPOSAL: Do not reuse empty container, destroy it by perforating or crushing. Wash container and put in trash collection. Avoid storage near feed or food products. Close container after each use.

HAZARDS TO HUMANS AND DOMESTIC ANIMALS

WARNING: Harmful if swallowed. May be absorbed through skin. Causes skin irritation. Avoid breathing vapor or spray mist. Use in well ventilated area. Avoid prolonged contact with skin and breathing of vapor or spray mist. Avoid contact with skin, eyes or clothing. In case of contact, immediately remove contaminated clothing and wash skin with soap and water.

CONTAINS PETROLEUM DISTILLATE. If swallowed, do not induce vomiting. Get immediate medical attention. For eyes, flush with plenty of water and get medical attention. Wash clothing before reuse.

ENVIRONMENTAL HAZARDS

This product is toxic to fish. Keep out of lakes, streams or ponds. Do not contaminate water by cleaning equipment or disposal of wastes. Apply this product only as specified on this label.

CHEMICAL HAZARDS

Keep away from heat or open flame.

**USE ONLY WITH ADEQUATE VENTILATION
KEEP OUT OF REACH OF CHILDREN**

True-Test Supreme, our Very Best-Quality