

WOODSMAN[®]

SOLID COLOR OIL STAIN AND WOOD PRESERVATIVE

- Water Repellent
- Resists Mildew
Rot & Decay

TRU-TEST
Supreme



KEEP OUT OF REACH OF
CHILDREN. **WARNING:**
SEE ADDITIONAL PRECAU-
TIONS ON BACK OF LABEL.

EXTERIOR, SHINGLES, SIDING, PANELING

ACT
3-
B1
B1
INEF

EPA
EPA

FINISH
Flat

AVERAGE COVERAGE
250-350 sq. ft.—1st Coat
300-400 sq. ft.—2nd Coat

DRY TIME
Allow 12-15 hrs.
Between Coats Thorough
drying requires 24 hrs.

THINNER
None Required

APPLICATION
Brush, Roller or Spray

PRIMER
None Required

CLEAN UP
Paint Thinner

SOLID COLOR OIL STAIN AND WOOD PRESERVATIVE

WOODSMAN SOLID COLOR OIL STAIN AND WOOD PRESERVATIVE is modified to give water repellency, resist rot, decay and mildew. Recommended for use on smooth or rough cut wood siding, shingles, shakes, fences, saw-texture lumber. May be used on primed or previously painted surfaces.

One coat gives full protection. On very porous or badly weathered wood, a second coat is recommended.

Solid Color Stain coats the surface of the wood as well as penetrates but still allows the texture to show. If repainting is ever desired, surface must be well weathered.

DIRECTIONS FOR USE: It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

Surface must be clean, free of dirt, grease and mildew (consult dealer for removing mildew). Mix well before using and stir often during application. Always buy enough stain for the complete job when applying; inter-mix all containers of the same color to assure color uniformity.

APPLICATION: Apply liberally. Cover a small area at a time and keep a wet edge to avoid lap marks. Work in the direction of the siding. Do not stop in the middle of an area; try to work to edges or corners. Avoid direct sunlight when applying; follow shaded side around house if possible. Do not apply before dew has evaporated or immediately before (or after) a rain.

STORAGE AND DISPOSAL: Do not reuse empty container, destroy it by perforating or crushing. Wrap container and put in trash collection. Avoid storage near feed or food products. Close container after each use.

PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS AND DOMESTIC ANIMALS

WARNING: CONTAINS PETROLEUM DISTILLATE. Harmful if swallowed. May be absorbed through skin. Causes skin irritation. Avoid breathing vapor or spray mist. Use in well ventilated area. Avoid prolonged contact with skin and breathing of vapor or spray mist. Avoid contact with skin, eyes or clothing. Wear protective clothing and rubber gloves when handling this product on freshly treated lumber.

FIRST AID

If swallowed, do not induce vomiting. Get immediate medical attention. For eyes, flush with plenty of water and get medical attention. In case of contact, immediately remove contaminated clothing and wash skin with soap and water. Wash clothing before reuse.

ENVIRONMENTAL HAZARDS


This product is toxic to fish. Do not apply directly to lakes, streams or ponds. Do not contaminate water by cleaning of equipment or disposal of wastes. Apply this product only as specified on this label.

PHYSICAL OR CHEMICAL HAZARDS

COMBUSTIBLE. Keep away from heat and open flame.

USE ONLY WITH ADEQUATE VENTILATION
KEEP OUT OF REACH OF CHILDREN

GENERAL PAINT & CHEMICAL CO. DIVISION OF COTTER & COMPANY
100% MEMBER OWNED CHICAGO, ILLINOIS 60614

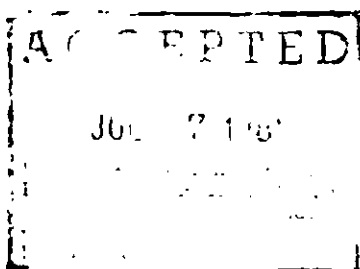

Sold Exclusively by



Hardware Stores & Home Centers

True-Test Supreme, our Very Best-Quality