

WILSON

exterior/oil base

Clear Wood Preservative and Sealer

ACCEPTED

FEB 4 1985

Under the Federal Insecticide,
Fungicide, and Rodenticide Act,
as amended, for the pesticide
registered under
EPA Reg. No. 11283-9

CW-C IBM No. 378 489

MILDEW
RESISTANT—
TREATED WITH
FUNGICIDE TO PROTECT
THE PAINT ITSELF FROM
THE GROWTH OF MILDEW

128 FL. OZ. (1 Gallon)

Our Best
TRU-TEST
Supreme

WARNING: KEEP OUT
OF REACH OF CHILDREN.
SEE ADDITIONAL PRECAU-
TIONS ON BACK OF LABEL.

- penetrates, beautifies and waterproo
- protects against dry rot, mildew and

OUR BEST QUALITY EXTERIOR CLEAR WOOD PRESERVATIVE AND SEALER

- Penetrates, beautifies and waterproofs wood
- Protects against dry rot, mildew and decay

FINISH	CLEAR
AVERAGE COVERAGE	Up to 400 Sq. Ft. per Gal. Depending on surface porosity
DRY TIME	Overnight
THINNER	None required
APPLICATION	Brush, Roller, Painting Pad or Airless Spray Stir before using and occasionally while using
PRIMER	None
CLEAN UP	Paint Thinner

RECOMMENDED FOR: Above ground application on bare wood siding, shingles, decks, fences and trim. Clear Wood Preservative and Sealer will protect wood from moisture damage and this sealer from mildew, while allowing natural weathering and graying process.

DIRECTIONS FOR USE: It is a violation of Federal Law to use this product in a manner inconsistent with its labeling. All surfaces must be clean and dry for proper penetration of sealer. Do not use over previously finished or stained wood without stripping off the old finish. If painting or staining over this sealer is ever desired, surface must be well weathered.

HOW TO APPLY: Apply liberally. For extra protection, use a second coat of clear wood sealer before first coat dries. Saturate end grain.

DRY TIME: For heavy traffic areas such as wood decks or patio furniture, allow 24-48 hours, depending on weather conditions, for complete drying.

CLEAN UP: Clean brushes and other tools with paint thinner.

STORAGE & DISPOSAL: Do not reuse empty container. Wrap container and put in trash collection.

CW-C FORMULA	Soya Alkyd Resin	16.4%
	Refined Creosote Oil	11.8%
	Bis (Tri-N-Butyltin) Oxide	0.5%
ANALYSIS BY WEIGHT	3 Iodo-2-Propynyl Butyl Carbamate	0.2%
	Driers & Additives	1.3%
BL10148-01	Mineral Spirits	69.8%
		100.0%

PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS AND DOMESTIC ANIMALS

WARNING—CONTAINS PETROLEUM DISTILLATE: Harmful if swallowed. May be absorbed through skin. Causes skin irritation. Avoid breathing vapor or spray mist. Use in well ventilated area. Avoid prolonged contact with skin, eyes or clothing. Wear protective clothing and rubber gloves when handling this product or freshly treated lumber.

FIRST AID

If swallowed do not induce vomiting. Get immediate medical attention. In case of contact, immediately remove contaminated clothing and wash skin with soap and water. Wash clothing before reuse.

ENVIRONMENTAL HAZARDS:


This product is toxic to fish. Do not apply directly to water. Do not contaminate water by cleaning of equipment or disposal of wastes. Apply this product only as specified on this label.

PHYSICAL AND CHEMICAL HAZARDS:

Do not use or store near heat or open flame.

USE ONLY WITH ADEQUATE VENTILATION

KEEP OUT OF REACH OF CHILDREN

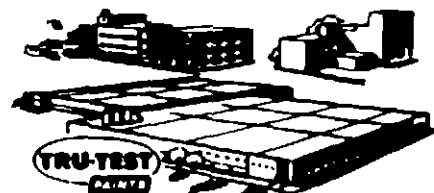

True Value Hardware Stores Own
3 Tru-Test Paint Factories with
75,000 Gallon Daily Capacity

GENERAL PAINT & CHEMICAL CO.
DIVISION OF COTTER & COMPANY—100% MEMBER OWNED
CHICAGO, ILLINOIS 60614

Sold Exclusively by



Hardware Stores & Home Centers