DIRECTIONS:

For Sewer Pipes;

- 1. Pour 1/2 lb. (8 oz.) into toilet bowl and flush. For best results Root-It-Out should be applied before retiring or at a time when sink drainage and/or toilet flow is minimal.
- 2. Repeat above at weekly intervals for the next three weeks.
- 3. Freventative maintenance repeat every six months.


For Septic Tank Drainage Fields:

1. Apply Root-It-Out directly to the lateral field through the distribution box, pouring 1/2 lb. into tank. Repeat four times per year.

IMPORTANT PRECAUTIONS

- 1. Do not put Root-It-Out in sink or tub drains, nor allow it to come in contact with chrome surfaces. Corrosion will result.
- 2. If sewers were neglected and are clogged by large thick roots, have a plumber open and repair the sewer. Then use Root-It-Out on a regular basis to attack roots. This procedure will prevent them from growing in the system and getting out of hand again.
- 3. This product is toxic to fish and other aquatic life. Do not use in storm drains.

CONTENTS: 8 OZ. NET WEIGHT

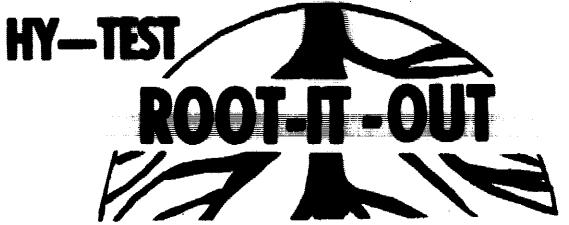

Root killer for the destruction and prevention of tree and shrub root growth in sewer pipes and septic tanks.



Active Ingredients

Copper Sulfate (CU SO4 5H20)

(Copper as metallic 25.2%)

99 0%

Inert Ingredients

1.0%

READ DIRECTIONS AND CAUTIONS BEFORE USING

CAUTION! Harmful is swallowed Keep away from children

See antidote if swallowed

ANTIDOTE:

If swallowed ... Call a physician. If consciinduce vomiting by giving a tablespoor salt in a glass of warm water and repeat a vomit fluid is clear. Give milk or white eggs beaten with water. Keep patient wa and quiet.

IMPORTANT:Do not use empty contain Discard properly.

EPA REG NO 11333-6

Distributed By

HY-TEST 303 CORP. Rutherford, N.J. 07070

aug 8, 1973