

**PRECAUTIONARY STATEMENTS**  
**HAZARDOUS TO HUMANS & DOMESTIC ANIMALS**

**WARNING**

Contains Petroleum Distillate Solvents

**HAZARDS TO HUMANS**

Causes eye irritation. Harmful if absorbed through skin. Avoid contact with skin, eyes or clothing. Wear protective clothing such as gloves, long sleeved cotton shirt, long pants and hat. May be fatal if swallowed or inhaled. Do not breathe dust, vapor or spray mist. Avoid spraying and/or sanding boat surface. Wear a mask or respirator jersey as proved by the Mining Enforcement and Safety Administration and the National Institute for Occupational Safety and Health. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

**STATEMENT OF PRACTICAL TREATMENT**

If swallowed: Drink plenty of water. Do not induce vomiting unless directed by a physician. If in eyes: Flush with plenty of water. Get medical attention if in skin: Wash with plenty of soap and water. Get medical attention if inhaled: Remove victim to fresh air. If not breathing, give artificial respiration, preferably mouth to mouth. Get medical attention.

**ENVIRONMENTAL HAZARDS:** Do not contaminate water by cleaning of equipment or disposal of wastes. This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill.

**PHYSICAL OR CHEMICAL HAZARDS:** FLAMMABLE. Keep away from heat and open flame.

**DO NOT USE IN BAY OR FRESH WATER.**

**DISPOSAL:** DO NOT REUSE CONTAINER WHEN EMPTY WASH AND PUT IN TRASH COLLECTION.

**NOTE:** When product is used in confined areas or applied by a person, wear a pesticide respirator jersey approved by the Mining Enforcement and Safety Administration (formerly U.S. Bureau of Mines) and the National Institute for Occupational Safety and Health under the provisions of 30 CFR 11.

**ACTIVE INGREDIENTS**  
 Cuprous Oxide  
**INERT INGREDIENTS**  
 TOTAL  
 Clear appearance as indicated

30.37%  
 80.63%  
 100%  
 35.02%



# Ship-Cote®



## 171 BLUE VINYL ANTI-FOULING BOTTOM PAINT

KEEP OUT OF REACH OF CHILDREN.

**WARNING!**


VAPOR HARMFUL. CAUSES EYES IRRITATION.

See side panel for additional precautionary statements.

NET CONTENTS: 1 GALLON (3.786 Liters)

ELLIS PAINT COMPANY  
 Long Beach, California 90819

EPA REG NO 11392-3  
 EPA EST NO 11392CA01

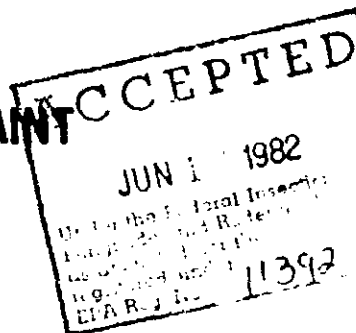

**VINYL ANTI-FOULING BOTTOM PAINT**

A very effective anti-fouling paint available in 171 Red and 171 Blue. Engineered to protect underwater surfaces against marine fouling organisms such as barnacles, hydroids, bryozoa and algae. Has good abrasion resistance giving a hard and slick surface thus making it possible to attain higher hull speeds. For use on up or power boats of fiberglass, steel or other.

**DIRECTIONS FOR USE**

It is a violation of Federal Law to use this product in a manner inconsistent with its label.

**APPLICATION OF 170 or 171 VINYL ANTI-FOULING PAINT**  
 Paint may be applied by spray, roller, or brush. Apply first coat in morning minimum of 4 hours before use. Three coats will do the most effective especially on red wood. Be sure to stir well before and during use. Boat should be put in water no sooner than 12 hours after application except when used on aluminum boat to promote adhesion. For Primer—then wait 72 hours before use. Boat should be launched within 2 weeks after final coat.

**THEFTED:** Do not use for ordinary application. Use of this paint is hazardous due to its composition and extensive lead. Use spray with Ship-Cote 70 Reducer.

**COVERAGE:** For best results 817% of (171) should be applied at the rate of 200-250 sq. feet per gallon per coat.

Use only with adequate ventilation  
 Do not use liberally  
**KEEP OUT OF REACH OF CHILDREN**  
 UNDESIRABLE READING