

# BAF-10

## COMPOSITION

	Percent By Weight
Active Ingredient	10.0 percent
Polyoxyethylene dimethyl amine diethylene dimethyl amine ethylene dichloride	10 percent
Inert Ingredient	90.0 percent
Weight Per Gallon	8.5 pounds
Weight of Active Ingredient	0.85 pound

## APPLICATION

BAF-10 is used to control algae, bacteria and fungi in recirculating commercial and industrial water cooling towers. Prior to its use, systems must be cleaned to remove algal growth, microbiological slime and other deposits. An initial slug addition of 6.0 to 15.0 fluid ounces of BAF-10 per 1000 gallons of water, to provide a concentration of 48 to 120 parts per million of BAF-10 based on the total weight of water in the system is recommended. Subsequent slug additions of 1.5 to 15.0 fluid ounces of BAF-10 per 1000 gallons of water (12 to 120 parts per million of BAF-10) should be employed every 2 to 5 days or as needed. The frequency of addition depends upon the relative amount of bleedoff and the severity of the microbiological problem. Slug additions should be made in the sump of water cooling towers.

## CAUTION

### KEEP OUT OF THE REACH OF CHILDREN

Harmful if swallowed. Avoid contact with skin and eyes. In case of contact flush with plenty of water for at least 15 minutes. If eye irritation persists get medical attention. Avoid contamination of food.


This product is toxic to fish. Do not add treated effluent to lakes, streams or ponds. Do not contaminate water by cleaning of equipment or disposal of waste. Use only as directed on label.

### CONTAINER DISPOSAL

Do not reuse empty container. Destroy it by perforating or crushing. Bury or discard in a safe place.

EPA Reg. No. 11529-2

Manufactured By  
FARRIS CHEMICAL CO., INC.  
7213 KINGSTON PIKE  
KNOXVILLE, TENNESSEE 37919

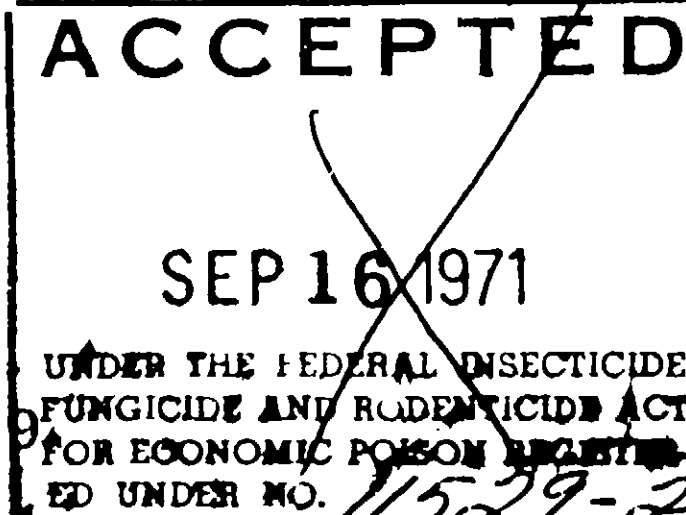

Comments 11529-2

LOOK ON BACK

ACCEPTED WITH COMMENTS