

For Use In Hospitals

# P / P DISINFECTANT DEODORANT SPRAY "H"

Eliminates Odors  
Kills Many Dangerous Germs  
Prevents Mold and Mildew

NET WT. 1 LB. 4 OZ.

## WARNING

Keep Out of Reach of Children  
Read Warnings on Back Label.

Made by: Peterson/Puritan, Inc.  
Danville, Illinois 61832

EPA Reg. No. 11525-31  
EPA Est. 11525-IL-1

Stock No. ....

ACCEPTED

DEC 3 1975

UNDER THE FEDERAL INSECTICIDE  
FUNGICIDE AND RODENTICIDE ACT  
FOR ECONOMIC POISON REGISTER.  
EPA UNDER NO. 11525-31

# P / P Disinfectant Deodorant Spray "H"

DISINFECTS — DEODORIZES

Staphylocidal      Pseudomonacidal      Streptocidal  
Virucidal\*          Tuberculocidal          Fungicidal

Powerful formula eliminates odors at their source. Does not just mask odors. Kills dangerous germs such as 'Staph' and "Strep" as well as athlete's foot fungus on environmental surfaces. Inhibits mold and mildew growth on hard non-porous surfaces.

Advanced formula disinfects against all of the following organisms on most environmental surfaces.

Staphylococcus aureus	Streptococcus pyogenes
Salmonella choleraesuis	Shigella dysenteriae
Mycobacterium smegmatis	Escherichia coli
Pseudomonas aeruginosa	Salmonella typhimurium
Trichophyton mentagrophytes	Aspergillus niger
Mycobacterium tuberculosis	*Influenza A2 virus

Use in patient rooms — emergency rooms — operating rooms — recovery rooms. Effective on dressing carts — laundry chutes — patient care items — bathroom facilities. Avoid use on polished wood, rayon fabrics or acrylic plastics.

### To Disinfect and Deodorize Surfaces:

Spray 6 to 10 inches from surface until wet.

### To Deodorize Enclosed Spaces:

Spray toward ceiling at 45° angle for a few seconds.

### For Mildew:

Clean surface if necessary. Spray surface until wet. Repeat as necessary.

### Active Ingredients:

n-Alkyl (60% C <sub>14</sub> , 30% C <sub>16</sub> , 5% C <sub>12</sub> , 5% C <sub>18</sub> )	
dimethyl benzyl ammonium chlorides	0.072%
n-Alkyl (68% C <sub>12</sub> , 32% C <sub>14</sub> )	
dimethyl ethylbenzyl ammonium chlorides	0.072%
Ethanol	53.088%
n-Alkyl (C <sub>18</sub> 92%, C <sub>16</sub> 8%)	
n-Ethyl morpholinium ethylsulfate	0.114%

Inert Ingredients: ..... 46.654%

"Contains Sodium Nitrite"

**WARNING:** Contents under pressure. Do not puncture or incinerate. Do not expose to heat or store above 120°F.

Do not spray into eyes or near food. Keep out of the reach of children. Do not fog rooms occupied by people or pets.

**DANGER:**

Keep Out of Reach of Children. Corrosive. Causes eye damage and skin irritation. Do not get in eyes, on skin or on clothing. Wear goggles or face shield and rubber gloves when handling. Harmful or fatal if swallowed. Avoid contamination of food.

**FIRST AID:**

In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes. For eyes, call a physician. Remove and wash contaminated clothing before reuse.

If swallowed, drink promptly a large quantity of milk, egg whites, gelatin solution or if these are not available, drink large quantities of water. Avoid alcohol. Call a physician immediately.

**NOTE TO PHYSICIAN:**

Probable mucosal damage may contraindicate the use of gastric lavage. Measures against circulatory shock, respiratory depression and convulsion may be needed.

**FISH AND WILDLIFE CAUTION:**

This product is toxic to Fish. Do not discharge treated effluent where it will drain into lakes, streams or ponds.

Do not reuse empty container. Destroy it by perforating or crushing. Bury or discard in a safe place.

- Complete Engineering Services for Metering and Handling Equipment and Bulk Tank Installations
- Specific Stack Exhaust Testing ■ Condenser-Cooling Tower Inhibitors ■ Non-polluting Inhibitors for Hydrostatic Water Testing ■ Standby Fuel Inhibitors



# PENTRON DB-88

## COOLING TOWER

### ALGAECIDE-SLIMICIDE


**ACTIVE INGREDIENT:**

n-Alkyl (50% C <sub>14</sub> , 40% C <sub>12</sub> , 10% C <sub>16</sub> )	
dimethyl benzyl ammonium chloride . . .	10%
INERT INGREDIENTS . . . . .	90%

EPA Registration No. 11539-1

**DANGER**

**KEEP OUT OF REACH OF CHILDREN**  
(See side panel for further cautions)

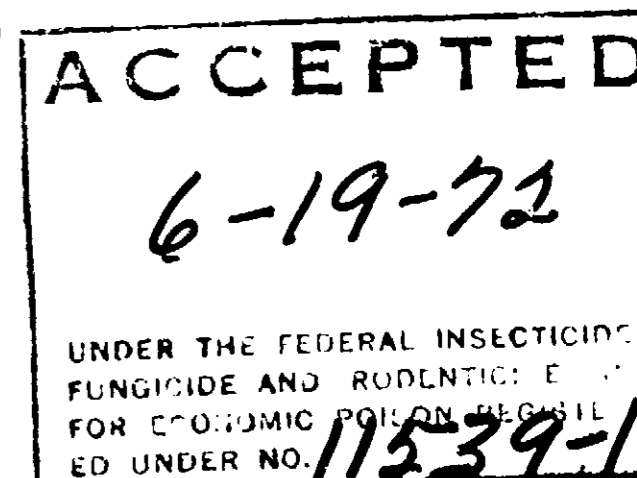

Pentron DB-88 Cooling Tower Algaecide-Slimicide is intended for use in commercial and/or industrial type cooling towers. It controls algae and slime on the wetted surfaces and in the recirculating water in cooling towers. The growth of algae and slime-producing bacteria and fungi can seriously reduce the efficiency of the entire cooling system. This situation can be avoided by the proper use of Pentron DB-88 Algaecide-Slimicide.

Net Contents

40 lbs.



■ D  
hib  
line  
bus  
Firc

**DANGER:**

Keep Out of Reach of Children. Corrosive. Causes eye damage and skin irritation. Do not get in eyes, on skin or on clothing. Wear goggles or face shield and rubber gloves when handling. Harmful or fatal if swallowed. Avoid contamination of food.

**FIRST AID:**

In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes. For eyes, call a physician. Remove and wash contaminated clothing before reuse.

If swallowed, drink promptly a large quantity of milk, egg whites, gelatin solution or if these are not available, drink large quantities of water. Avoid alcohol. Call a physician immediately.

**NOTE TO PHYSICIAN:**

Probable mucosal damage may contraindicate the use of gastric lavage. Measures against circulatory shock, respiratory depression and convulsion may be needed.

**FISH AND WILDLIFE CAUTION:**

This product is toxic to Fish. Do not discharge treated effluent where it will drain into lakes, streams or ponds.

Do not reuse empty container. Destroy it by perforating or crushing. Bury or discard in a safe place.

- Complete Engineering Services for Metering and Handling Equipment and Bulk Tank Installations
- Specific Stack Exhaust Testing ■ Condenser-Cooling Tower Inhibitors ■ Non-polluting Inhibitors for Hydrostatic Water Testing ■ Standby Fuel Inhibitors



# PENTRON DB-88

## COOLING TOWER

### ALGAECIDE-SLIMICIDE


**ACTIVE INGREDIENT:**

n-Alkyl (50% C <sub>14</sub> , 40% C <sub>12</sub> , 10% C <sub>16</sub> )	
dimethyl benzyl ammonium chloride . . .	10%
<b>INERT INGREDIENTS</b> . . . . .	<b>90%</b>

EPA Registration No. 11539-1

**DANGER**


**KEEP OUT OF REACH OF CHILDREN**  
(See side panel for further cautions)

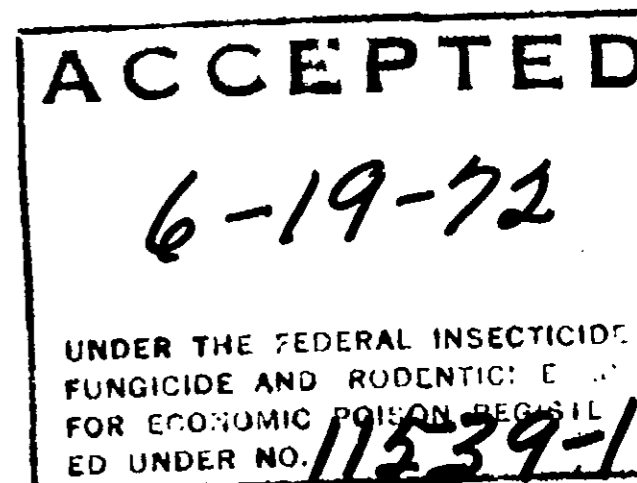

Pentron DB-88 Cooling Tower Algaecide-Slimicide is intended for use in commercial and/or industrial type cooling towers. It controls algae and slime on the wetted surfaces and in the recirculating water in cooling towers. The growth of algae and slime-producing bacteria and fungi can seriously reduce the efficiency of the entire cooling system. This situation can be avoided by the proper use of Pentron DB-88 Algaecide-Slimicide.

Net Contents

40 lbs.

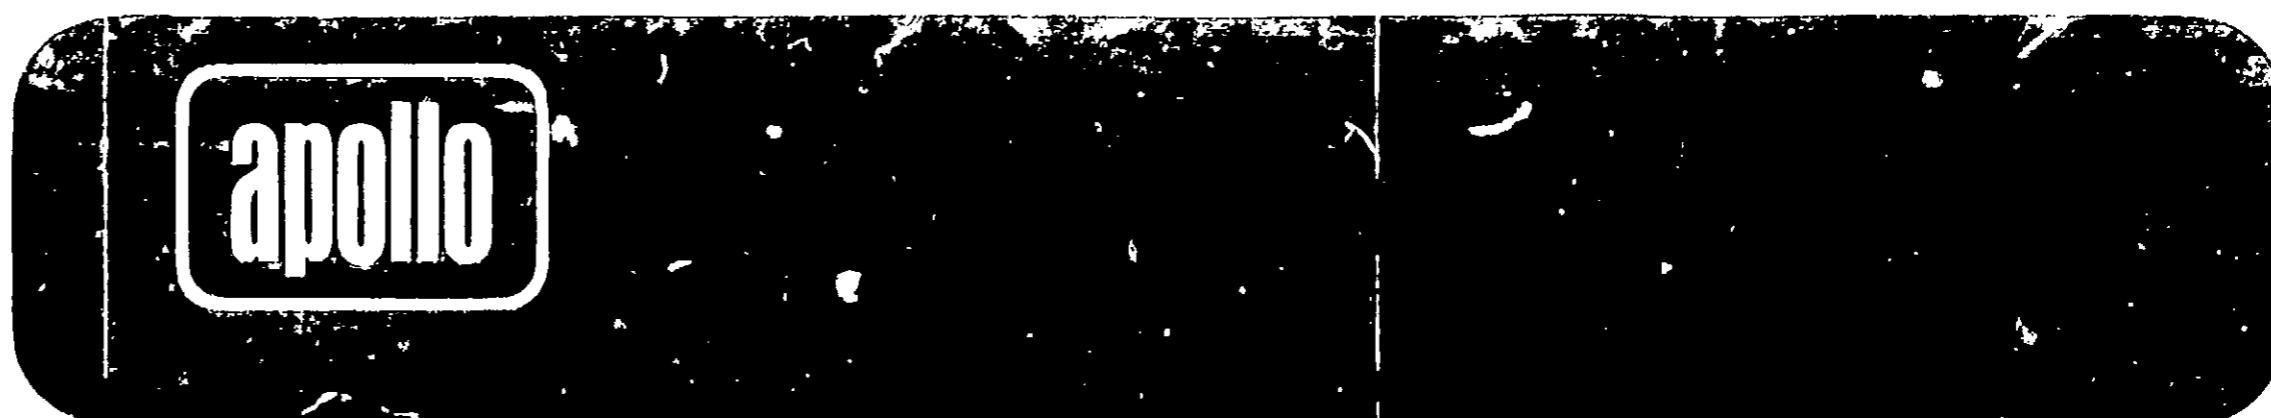

hit  
lin  
bu  
Fir




# PENTRON DB-88 COOLING TOWER ALGAECIDE-SLIMICIDE

ACTIVE INGREDIENT:  
n-Alkyl (50% C<sub>14</sub>, 40% C<sub>12</sub>, 10% C<sub>16</sub>)  
dimethyl benzyl ammonium chloride . . . 10%  
INERT INGREDIENTS . . . . . 90%

EPA Registration No. 11539-1

**DANGER**  
**KEEP OUT OF REACH OF CHILDREN**  
(See side panel for further cautions)

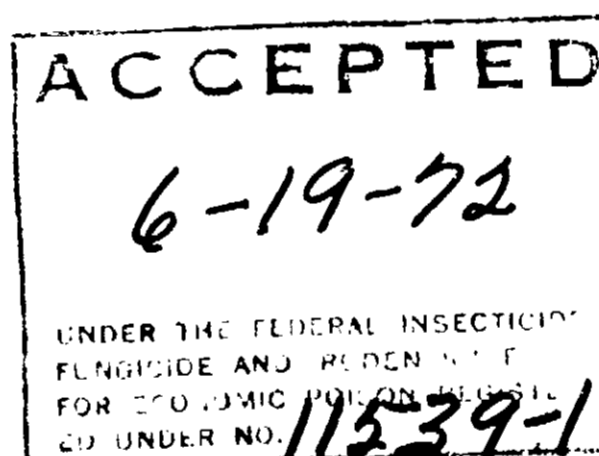

Pentron DB-88 Cooling Tower Algaecide-Slimicide is intended for use in commercial and/or industrial type cooling towers. It controls algae and slime on the wetted surfaces and in the recirculating water in cooling towers. The growth of algae and slime-producing bacteria and fungi can seriously reduce the efficiency of the entire cooling system. This situation can be avoided by the proper use of Pentron DB-88 Algaecide-Slimicide.

Net Contents

40 lbs.

### USE DIRECTIONS

Pentron DB-88 should be added to the cooling water at the reservoir (sump) or at the distribution pan. In towers equipped with metering devices or continuous feed equipment this equipment may be used to disperse the product into the tower.

### INITIAL DOSE

In a clean system, with no algae or microbial slime growth visible, add three gallons of Pentron DB-88 Algaecide-Slimicide per 10,000 gallons of cooling water.

If Algae and microbial slime growth is visible, add six gallons of Pentron DB-88 Algaecide-Slimicide per 10,000 gallons of cooling water.

### SUBSEQUENT TREATMENT

**Towers With Continuous Feed Equipment** After the initial dose, maintain a concentration of 10 ppm active ingredient by continuously feeding Pentron DB-88 Algaecide-Slimicide at a rate of one gallon per 10,000 gallons of "bleed-off". If algae or microbial slime growth becomes visible, add three gallons of Pentron DB-88 Algaecide-Slimicide per 10,000 gallons of cooling water as "slug dose". This "slug dose" should be followed with the regular maintenance concentration of 10 ppm active ingredient.

**Towers Without Continuous Feed Equipment** After the initial dose, add one to three gallons of Pentron DB-88 Algaecide-Slimicide per 10,000 gallons of cooling water once per week or more often if needed to prevent algae or microbial slime growth. If growth becomes visible, a "slug dose" of three to six gallons of Pentron DB-88 Algaecide-Slimicide should be added to the cooling water. This slug dose should then be followed by the regular maintenance dose.



- Diesel Smoke Suppressing Agents
- Acid Smut Inhibitors
- Refinery Gasoline and Fuel Additives
- Pipeline Corrosion Inhibitors
- Heavy Duty Marine Combustion Catalysts and Slag Inhibitors
- Complete Fireside Additives