


DDC - 30

Distributed by Industrial Water Chemicals

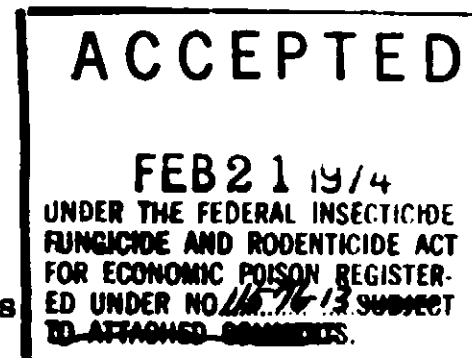

ACTIVE INGREDIENTS 30%
Sodium dimethyldithiocarbamate 15%
Nabam (disodium ethylene bisdithiocarbamate) 15%
INERT INGREDIENTS 70%

WARNING-KEEP OUT REACH OF CHILDREN

Harmful or fatal if swallowed or absorbed through skin. Injurious to eyes. Causes skin irritation. Rapidly absorbed through skin. Do not get into eyes, on skin or clothing. Do not take internally. Wash thoroughly after handling. Wash clothes before reuse. Keep package tightly closed when not in use. Use with adequate ventilation. Wear goggles or face shield and rubber gloves when handling.

FIRST AID

In case of contact with eyes, immediately flush with water and get medical attention. In case of contact, remove contaminated clothing and immediately wash skin with soap and water. If irritation persists get medical treatment.

THIS PRODUCT IS TOXIC TO FISH. TREATED EFFLUENT SHOULD NOT BE DISCHARGED WHERE IT WILL DRAIN INTO LAKES, STREAMS, PONDS, OR PUBLIC WATER. USE ONLY AS DIRECTED.

DIRECTIONS FOR USE

DDC-30 is used to control fungi and bacteria in recirculating commercial and industrial water cooling towers. Apply DDC-30 at a point in the system where it will be uniformly mixed and at a time when the system is in jeopardy of becoming affected or after cleaning systems whose efficiency is already impaired. Heavily fouled systems must be cleaned prior to treatment with this product. An initial slug addition of 13.06 fluid ounces of DDC-30 per 1000 gallons of water in the system to provide a concentration of 120 ppm of DDC-30 based on total weight of water in the system, is recommended. Repeat initial dosage recommendations until control is evident. When control is evident, subsequent treatments should be 2.18 to 4.36 fluid ounces of DDC-30 per 1000 gallons of water in the system, to provide 20 to 40 ppm of DDC-30 based on total weight of water in the system. Subsequent doses should be added every 2 to 5 days as needed.

In treating air washers pre-clean by introducing a suitable detergent into the system and allow air washer to run with fan off for two hours. Flush. Check all nozzles and manually clean those that are plugged. Add product as specified under dosage for cooling tower.

DO NOT REUSE EMPTY DRUM. Return to drum reconditioner or destroy by perforating or crushing and burying in a safe place away from water supplies.

Weight One Gallon - - 9.8 lbs.

E.P.A. Reg. No. 11576-13

FOR CHEMICAL CONTROL OF
INDUSTRIAL WATER PROBLEMS



314 SPEARS AVE. PHONE 267-6781



DATE _____
GROSS _____
TARE _____
NET _____ GALLONS
CUSTOMER _____
NUMBER _____