

# INDUSTRIAL WATER MANAGEMENT

## A 20 ALGAECIDE

A-20 Algaecide is used to inhibit the growth of algae, bacteria and fungi in commercial and industrial recirculating water cooling towers and air wash systems. Before treatment with A-20 Algaecide systems must be cleaned to remove algal growth, microbiological slimes and other deposits. Then the system should be treated with an initial slug addition to a point of rapid circulation of 5 fluid ounces (40 ppm) to 12.5 fluid ounces (100 ppm) of A-20 Algaecide per 1000 gallons of water in the system. Repeat the initial dosage until control is evident. Subsequent slug additions of 1.25 fluid (10 ppm) to 12.5 fluid ounces (100 ppm) of A-20 Algaecide per 1000 gallons of water should be made every 2 to 10 days, or as needed. The required frequency of treatment depends on the relative amount of bleed-off and the severity of the microbiological problem. Slug additions should be made to a point of rapid circulation in water cooling tower sumps or distribution trays.

Active Ingredient:-----12%  
Poly[oxyethylene(dimethyliminio)ethylene(dimethyliminio)ethylenedichloride]-----12%  
Inert Ingredient-----88%  
Weight per Gallon-----8.53 Lbs.  
Weight of Active Ingredient per Gallon-----1.02 Lbs.

### WARNING

#### KEEP OUT OF REACH OF CHILDREN

Do not get in eyes, on skin, or on clothing. Wear goggles or face shield and rubber gloves when handling. Harmful if swallowed. Avoid contamination of food.


FIRST AID: In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes. For eyes call a physician. Remove and wash contaminated clothing before reuse. If swallowed, give patient doses of powdered charcoal immediately or all he can swallow of raw egg white, milk, gruel, or flour and water. Then induce vomiting with salt, soap, or mustard in warm water. Call a physician immediately.

#### ENVIRONMENTAL HAZARDS

This product is toxic to fish. Treated effluent should not be discharged where it will drain into lakes, streams, ponds, or public water. Do not contaminate water by cleaning of equipment, or disposal of wastes. Do not reuse empty container. Return to drum reconditioner or destroy by perforating or crushing and burying in a safe place. Apply this product only as specified on this label.

EPA REG. NO. 11617-1

EPA EST. 11617-IL-1

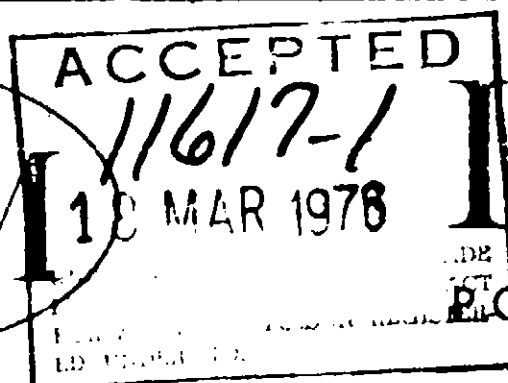

**IWIM** corporation

P.O. BOX 130

ARLINGTON HEIGHTS, ILLINOIS 60006