

KEMICIDE-163

SLIME CONTROL

EPA REG. No. 11619-3

11619-3 *Comment*

APPLICATION

Kemicide-163 is used to inhibit the growth of algae, bacteria, and fungi in recirculating commercial and industrial cooling water systems. Before treatment with Kemicide-163 systems must be cleaned to remove algal growth, microbiological slime, and other deposits. Then the system should be treated with an initial slug addition of 6.9 to 13.9 fluid ounces of Kemicide-163 per 1,000 gallons of water in the system. Repeat the initial dosage until control is evident. Subsequent slug additions of 2.3 to 13.9 fluid ounces of Kemicide-163 per 1,000 gallons of water should be made every 1 to 5 days or as needed. The required frequency of treatment depends on the relative amount of bleedoff and the severity of the microbiological problem. Slug additions of Kemicide-163 should be made to the sump of water cooling towers.

Active ingredients.....	Weight per gallon.....
Disodium cyanodithioimidocarbonate.....	Weight of active ingredients per gallon.....
Potassium N-methyldithiocarbonate.....	
Inert ingredients.....	

WARNING

KEEP OUT OF THE REACH OF CHILDREN

Causes eye damage and skin irritation. Do not use without goggles or face shield and rubber gloves when handling. Avoid contamination of food.

FIRST AID: In case of contact, immediately flush with water for at least 15 minutes. For eyes, call a physician. Remove contact lenses if possible.

If swallowed, give patient doses of powdered charcoal, raw egg white, milk, gruel, or flour and water. Do not induce vomiting. Call a physician immediately.

Do not reuse empty drum. Return to drum recycler for recycling and burying in a safe place.

This product is toxic to fish. Treated effluent should not be discharged into lakes, streams, ponds, or public water. Apply this product to water.

Do not contaminate water by cleaning of equipment.

MANUFACTURED BY

CHEMICAL TESTING CORP.


32-10 37th AVENUE

LONG ISLAND CITY, N.Y.

MICIDE-163

SLIME CONTROL

EPA REG. No. 11619-3

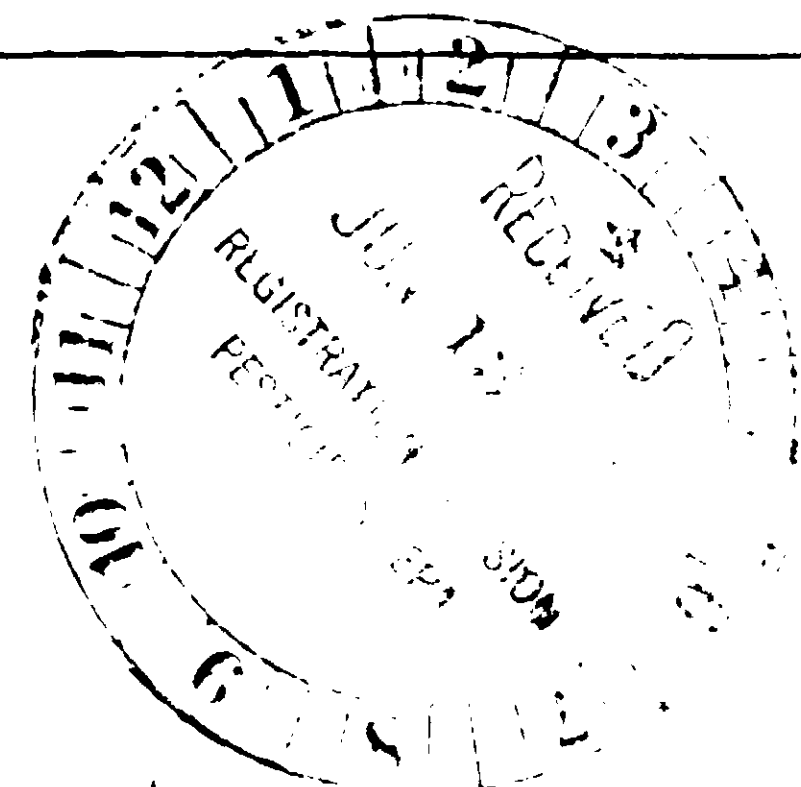

Percent by weight

Active ingredients.....	8.75 percent
Disodium cyanodithioimidocarbonate.....	3.68 percent
Potassium N-methyldithiocarbonate.....	5.07 percent
Inert ingredients.....	91.25 percent

Weight per gallon..... 8.81 lb.

Weight of active ingredients per gallon..... 0.77 lb.

WARNING

KEEP OUT OF THE REACH OF CHILDREN

Causes eye damage and skin irritation. Do not get in eyes, on skin, or on clothing. Wear goggles or face shield and rubber gloves when handling. Harmful or fatal if swallowed. Avoid contamination of food.

FIRST AID: In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes. For eyes, call a physician. Remove and wash contaminated clothing before reuse.

If swallowed, give patient doses of powdered charcoal immediately or all he can swallow of raw egg white, milk, gruel, or flour and water. Then induce vomiting with salt, soap or mustard in warm water. Call a physician immediately.

Do not reuse empty drum. Return to drum reconditioner or destroy by perforating or crushing and burying in a safe place.

This product is toxic to fish. Treated effluent should not be discharged where it will drain into lakes, streams, ponds, or public water. Apply this product only as specified on this label.

Do not contaminate water by cleaning of equipment, or disposal of wastes.

MANUFACTURED BY

ICAL TESTING CORP.

IVE

LONG ISLAND CITY, N. Y. 11101

ALL RIGHTS RESERVED