

#4179 TROPICAL ANTI-FOULING

BPS ANTI-FOULING PAINT is recommended for use as a bottom paint from keel to light load line on commercial tankers and merchant ships sailing in tropic and temperate waters. It is formulated with a special binder that will slowly leach and release the active ingredients which will inhibit plant growth and is poisonous to hard shell foulants such as barnacles, annelids, mollusks, etc.

DIRECTIONS FOR APPLICATION

Stir the paint thoroughly and apply 1 - 2 coats over BPS Primer #4176 Anti-Corrosive. Allow 4 - 6 hours dry between coats of BPS Anti-Fouling Paint. When the finish is dry to touch, 4 - 6 hours, the ship may be floated. Do not wait longer than 48 hours before floating. If thinner is needed, use BPS Thinner #3146 up to 1 pint per gallon. For clean equipment, brushes, rollers, spray equipment, use BPS Thinner #3146.

CAUTION: Contains Petroleum Distillate

If swallowed, do not induce vomiting. CALL PHYSICIAN IMMEDIATELY. COMBUSTIBLE (Flash Point 105° F.) Keep away from heat and open flame. Avoid contact with skin and breathing of vapor or spray mist. Harmful if swallowed. Close container after each use. Do not use empty container. Destroy it by perforating or crushing. Bury or discard in a safe place.

KEEP OUT OF THE REACH OF CHILDREN.

Net Contents - 5 U.S. Gallons



GUARANTEED
TO GIVE
SATISFACTION
OR PURCHASE PRICE
WILL BE REFUNDED

PATTERSON-SARGENT

A

textron

DIVISION

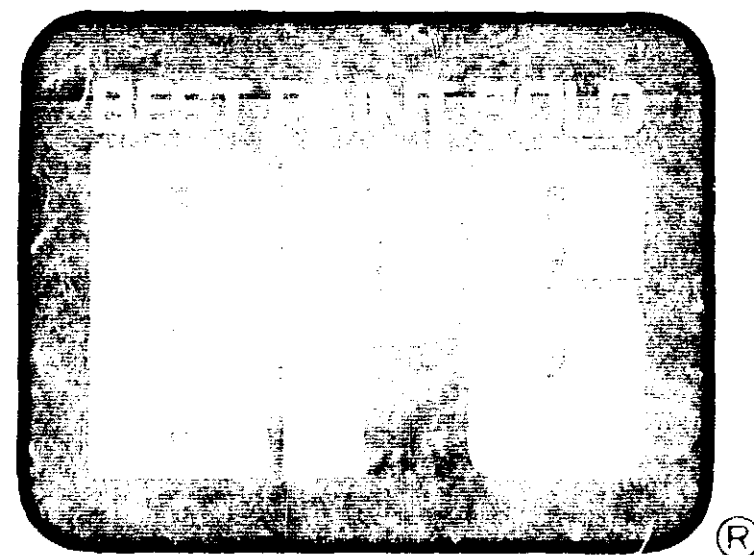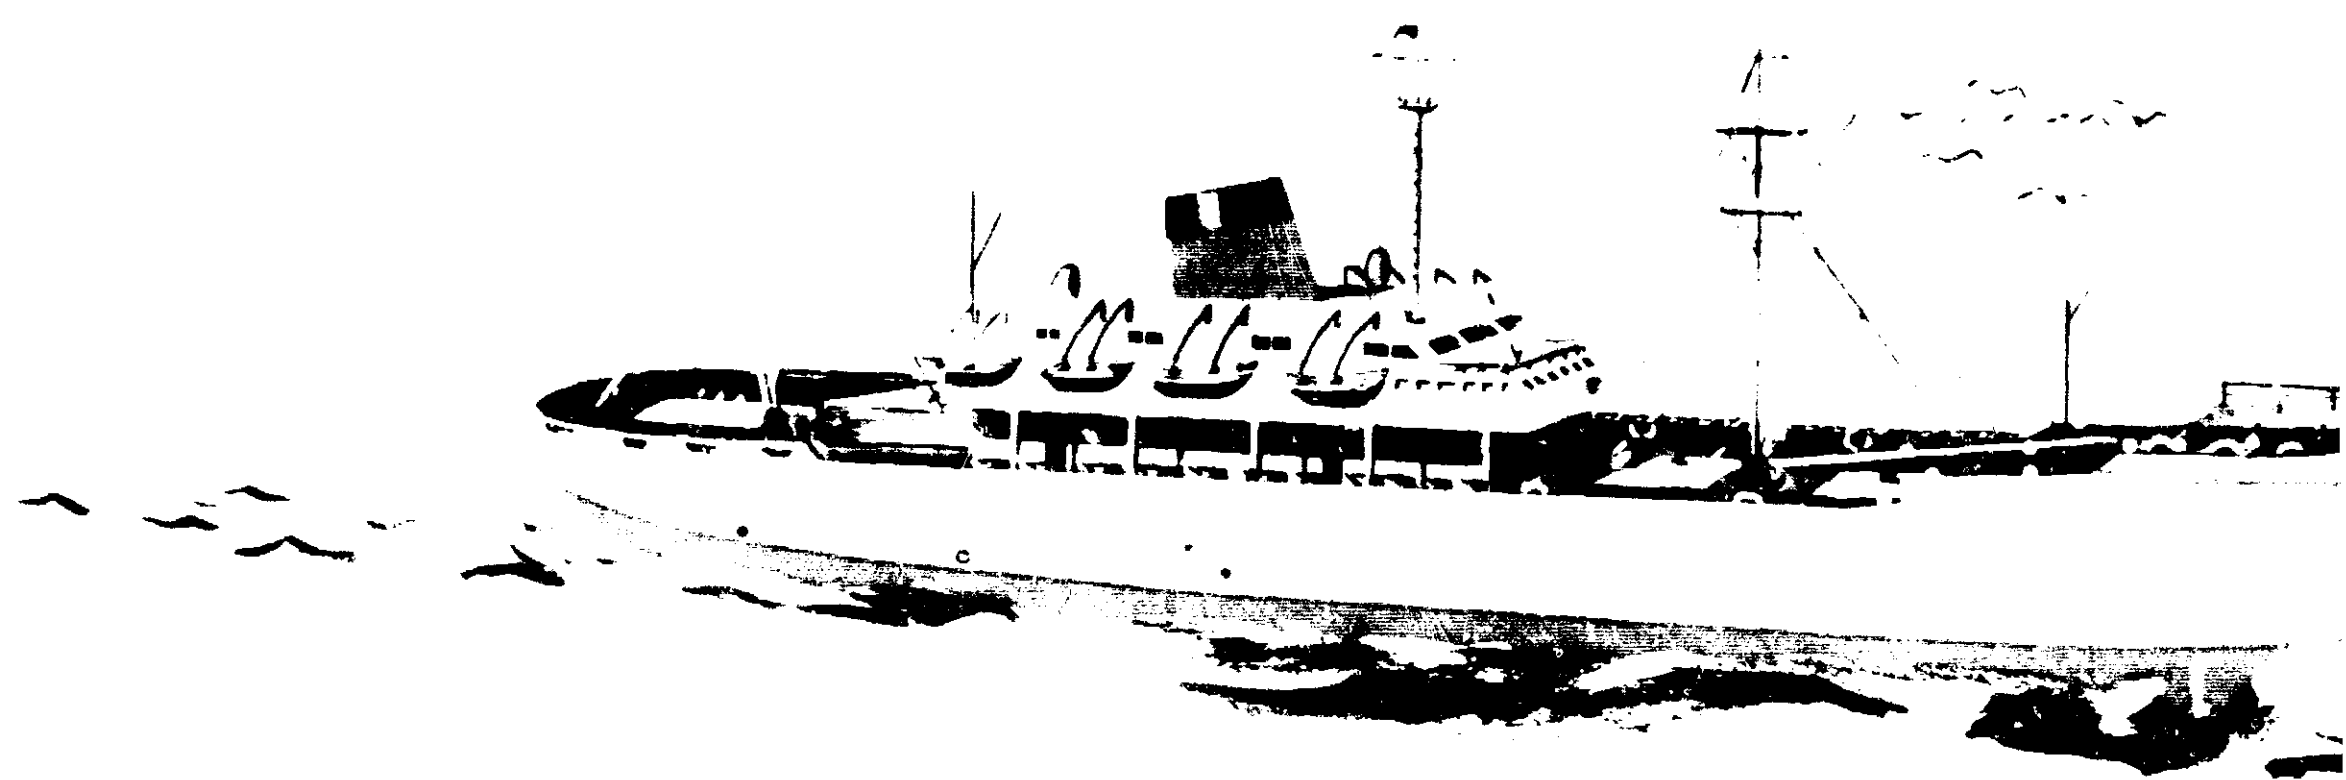

®

MARINE PAINT



®

4180

SUPER TROPICAL ANTI-FOULING

Active Ingredients	Cuprous Oxide	20.2%
Inert Ingredients		79.8%
		<hr/> 100.0%

NET 5 GALLONS

CAUTION: KEEP OUT OF THE REACH OF CHILDREN