

Professional Engineering Service

Manufacturing

For

Laboratory


ACCEPTED Chemists

Water Conditioning

Controlled

Scale Removing

Steam and Cooling Systems

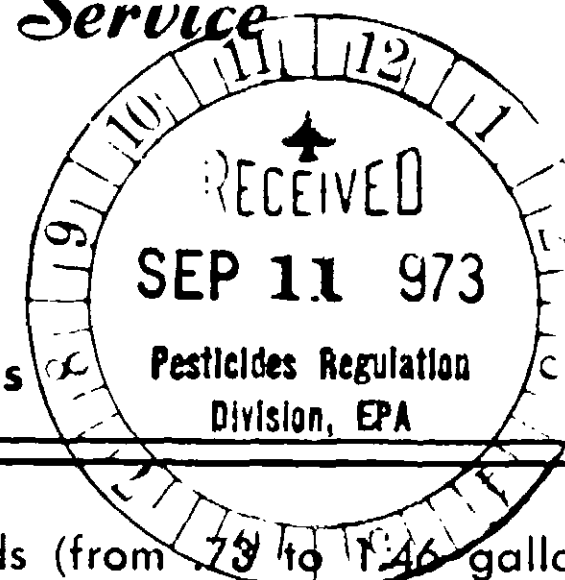

UNDER THE FEDERAL INSECTICIDE FUNGICIDE AND RODENTICIDE ACT FOR ECONOMIC POISON REGISTERED UNDER NO. 11712-4

RUSTROL

FORMULA 215-50L

COMPOSITION

ACTIVE INGREDIENTS	4.13% by weight
Alkyl (C ₁₁ -50%, C ₁₂ -40%, C ₁₆ -10%) Dimethyl Benzyl Ammonium Chloride	3.44
Ethanol69
INERT INGREDIENTS	95.87% by weight
Water	95.87
Weight per gallon	8.315 pounds
Weight active ingredients per gallon	0.075 pounds

APPLICATION

RUSTROL Formula 215-50L is used in industrial, commercial and institutional recirculating cooling water towers to control the growth of algae and fungi. Begin treatment when the system is in jeopardy of becoming affected or after cleaning systems whose efficiency is already impaired. Badly fouled systems must be cleaned before treatment is begun. Apply at a point in the system where the product will be uniformly mixed.

For continuous feed methods, an initial dose of from 6.06 to

12.12 pounds (from .73 to 1.46 gallons) of RUSTROL Formula 215-50L per 1000 gallons of water in the system. Apply one-half of this initial dose when half of the water in the system has been lost by bleed-off. When control of microbial growth is evident, apply 2.02 to 6.06 pounds (from .24 to .73 gallons) of RUSTROL 215-50L for each 1000 gallons of water lost from bleed-off.

For intermittent feeding, an initial dose of from 6.06 to 12.12 pounds (.73 to 1.46 gallons) of RUSTROL Formula 215-50L per 1000 gallons of water in the system. Repeat until control is achieved. When microbial control is evident, add 3.03 to 6.06 pounds (.37 to .73 gallons) of RUSTROL Formula 215-50L per 1000 gallons of water in the system every 2 to 5 days, or as needed to maintain control.

CAUTION

KEEP OUT OF REACH OF CHILDREN.

Avoid contact with skin, eyes, and clothing.

First Aid: In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes.

Use only as directed. Do not reuse empty container. Return to drum conditioner or destroy by perforating or crushing and burying in a safe place away from water supplies.

This product is toxic to fish. Treated effluent should not be discharged where it will drain into lakes, streams, ponds, or public water. Apply this product only as specified on this label.

EPA Reg. 11712-4

Net Contents _____ Gallons

MANUFACTURED BY

WEST CHEMICAL & ENGINEERING CO., INC.

1187 HUFF ROAD, N. W.

TEL. 351-6449

LANTA, GEORGIA 30318