


Professional Engineering Service

Manufacturing
Chemists

For
Water Conditioning
Scale Removing
Steam and Cooling Systems

Laboratory
Controlled

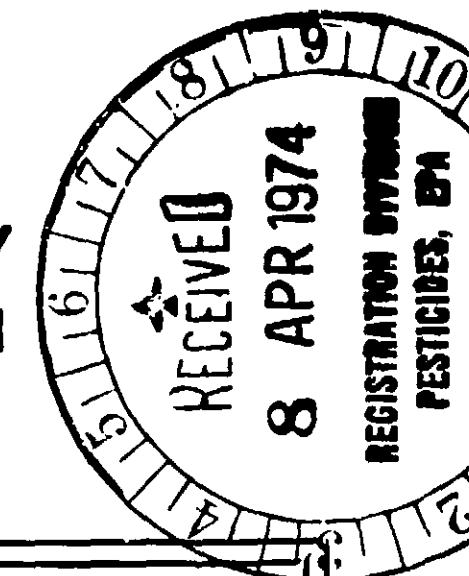

RUSTROL

RUSTROL FORMULA 215-10L

COMPOSITION

	Percent by weight
ACTIVE INGREDIENTS	
Alkyl (C ₁₄ —50%, C ₁₂ —40%, C ₁₆ —10%)	
Dimethyl Benzyl Ammonium Chloride.....	0.86
INERT INGREDIENTS	99.14
WEIGHT PER GALLON.....	8.33 pounds
ACTIVE INGREDIENTS, WEIGHT PER GALLON..	0.0716 pounds

APPLICATION

RUSTROL Formula 215-10L is used in industrial, commercial and institutional recirculating cooling water towers to control the growth of algae and fungi. Begin treatment when the system is in jeopardy of becoming badly affected or after cleaning systems whose efficiency is already impaired. Badly fouled systems must be cleaned before treatment is begun. Apply at a point in the system where the product will be uniformly mixed.

For continuous feed methods, an initial dose is from 2.92 to 5.84 gallons of RUSTROL Formula 215-10L per 1000 gallons of water in the system. Apply half of this initial dose when half of the water in the system has been lost by bleed off. When control

of microbial growth is evident, apply .972 to 2.92 gallons of RUSTROL Formula 215-10L for each 1000 gallons of water lost from bleed off.

For intermittent feeding, an initial dose of from 2.92 to 5.84 gallons of RUSTROL Formula 215-10L per 1000 gallons of water in the system is used. Repeat until control is achieved. When microbial control is evident, add .972 to 2.92 gallons of RUSTROL Formula 215-10L per 1000 gallons of water in the system every 2 to 5 days, or as needed to maintain control.

CAUTION

KEEP OUT OF REACH OF CHILDREN

DO NOT get in eyes, on skin, or on clothing. Harmful or fatal if swallowed. In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes. For eyes, call a physician.

This product is toxic to fish. Treated effluent should not be discharged where it will drain into lakes, streams, ponds or public water.

DO NOT contaminate water by cleaning of equipment or disposal of waste. USE ONLY AS DIRECTED. DO NOT RE-USE CONTAINER; return to drum conditioner or destroy by perforating or crushing and burying in a safe place, away from water supplies.

EPA Reg. 11712-6

NET CONTENTS 5 GALLONS
EPA EST. 11712-GA-1

MANUFACTURED BY

WEST CHEMICAL & ENGINEERING CO., INC.

1187 HUFF ROAD, N. W.

TEL. 351-6449

ATLANTA, GEORGIA 30318