

DIRECTIONS FOR USE

Hugin treatment when the system is in propards of becoming affected or after cleaning systems whose efficiency is already impaired.

Apply at a point in the system where the product will be uniformly mixed.

Initial Dose: 1-2 gallons ALGAE CONTROL to each 5,000 gallons of wat tained in the system. Repeat until crol is achieved.


Periodic Dose: 1-3 quarts ALGAE CONTROL to each 5,000 gallons of water contained in the system every 7 days or sooner should visible growth appear.

For best results, clean heavily contaminated systems before treatment with this product. If soap or anionic detergent is used, rinse thoroughly before charging with ALGAE CONTROL.

Do not be alarmed with the sudden appearance of organic debris in the system during the first week of operation. This is normal and is a good indication that ALGAE CONTROL has effectively penetrated and dislodged dead organic material which tenaciously adheres to metal and wooden surfaces as living matter. This debris should be removed from the system to avoid clogging of screens and pipes.

This uct is toxic to fish. Treated efflue. .nould not be discharged where it will drain into lakes, streams, ponds or public water. Apply this product only as specified on this label.

EPA Reg. No. 12355-4

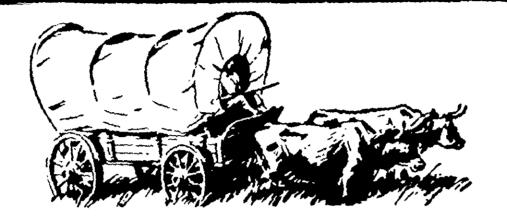

AN EXCLUSIVE PRODUCT SOLD BY

PIONEER CHEMICAL INC.

PONCA PLANT BOX 787 PONCA CITY, OKLA. GENERAL OFFICE 521 STATE ST. AUGUSTA, KANSAS

Concentrated slimicide for industrial re-circulating cooling water towers.

ALGAE CONTROL

Helps keep water systems clear and free of visible algae slimes. Inhibits the growth of bacteria.

ACTIVE INGREDIENTS:

n-Alkyl (60%C14, 30%C16, 5%C12, 5%C18) dimethyl benzyl ammonium chlorides...... 5%

n-Alkyl (68%C12, 32%C14) dimethyl ethylbenzyl ammonium chlorides...... 5%

INERT INGREDIENTS: 9

NET CONTENTS: _

WARNING

Keep Out of Reach of Children. See additional warnings.

When ALGAE CONTROL is used as directed, it will aid in controlling and/or preventing the development of unsanitary slime conditions which are unsightly, produce foul odors and which are often the cause of equipment breakdown.

ALGAE CONTROL is compatible with virtually all corrosion inhibition additives, but should not be used in the presence of soap or other anionic detergents. ALGAE CONTROL at use dilution is non-corrosive to inanimate hard surfaces.

FIRST AID

In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes. For eyes, call a physician. Remove and wash contaminated clothing before reuse.

If swallowed, drink promptly a large quantity of milk, egg whites, gelatin solution or if these are not available, drink large quantities of water. Avoid alcohol. Call a physician immediately.

NOTE TO PHYSICIAN:

Probable mucosal damage may contraindicate the use of gastric lavage. Measures against circulatory shock, respiratory depression and convulsion may be needed.

DANGER: Keep Out of Reach of Children. Corrosive. Causes eye damage and skin irritation. Do not get in eyes, on skin or on clothing. Wear goggles or face shield and rubber gloves when handling. Harmful or fatal if swallowed. Avoid contamination of food.