


AQUACIDE 150

COMPOSITION

	Percent by weight
Active ingredient	10.9 percent
Poly [oxyethylene (dimethyliminio) ethylene (dimethyliminio)-ethylene dichloride]	10.9 percent
Inert ingredient	89.1 percent
Weight per gallon	8.48 pounds
Weight of active ingredient per gallon	0.92 pounds

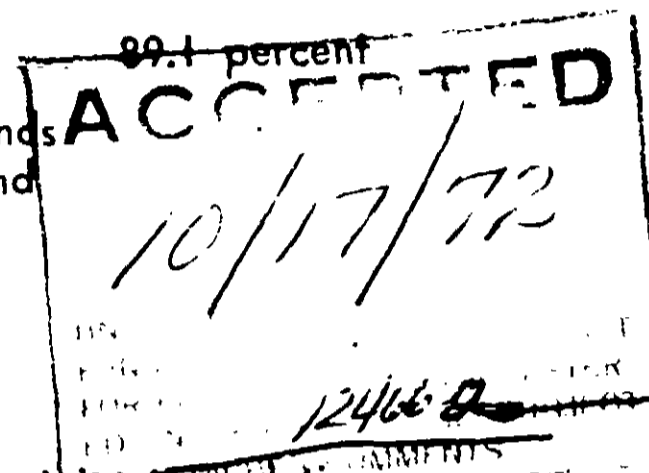

APPLICATION

AQUACIDE-150 is used to control algae, bacteria, and fungi in recirculating commercial and industrial water cooling towers. Prior to its use, systems must be cleaned to remove algal growth, microbiological slime and other deposits. An initial slug addition of 5.55 to 13.9 fluid ounces of AQUACIDE-150 per 1000 gallons of water, to provide a concentration of 44 to 110 parts per million of AQUACIDE-150 based on the total weight of water in the system is recommended. Repeat until control is achieved. Subsequent slug additions of 1.39 to 13.9 fluid ounces of AQUACIDE-150 per 1000 gallons of water (11 to 110 parts per million of AQUACIDE-150) should be employed every 2 to 5 days or as needed. The frequency of addition depends upon the relative amount of bleedoff and the severity of the microbiological problem. Slug additions should be made in the sump of water cooling towers.

12466-2

CAUTION

KEEP OUT OF THE REACH OF CHILDREN

Harmful if swallowed. Avoid contact with skin and eyes. In case of contact flush with plenty of water for at least 15 minutes. If eye irritation persists get medical attention. Avoid contamination of food.

This product is toxic to fish. Treated effluent should not be discharged where it will drain into lakes, streams, ponds or public water. Do not contaminate water by cleaning of equipment or disposal of waste. Use only as directed on label. Do not reuse container. Destroy when empty.

EPA Reg. No. 12466-2
Aqua Laboratories, Inc.
12466-2
Aqua Laboratories, Inc.