

Fogmaster

SPECIFICATIONS


Motor — 110/120 volt, AC-DC Universal type, 50/60 cycle
16,000 r.p.m., continuous duty.

- Shipping weight 13 pounds
- Length 12½ inches
- Diameter 8¾ inches
- Height 15¾ inches
- Tank One Gallon Capacity
- Automatic Timer (optional)
- Electric Turntable (optional)
- Drum Adapter (optional)

*NOTE:

With fogging machines of the aspirating type, the volume of liquid dispersed may vary as much as 20% depending on the viscosity, specific gravity, surface tension, temperature, etc. of the liquid used; the various altitudes (above sea level) at which the machine is operated, and the liquid surface level in the supply container. The metering proportions also may vary relative to each other under influence of the foregoing and especially with liquids having different surface tensions, as water vs. oil. Thus no fixed amount can be stated for the liquid output volume.

We are proud to say: Made in the U.S.A.

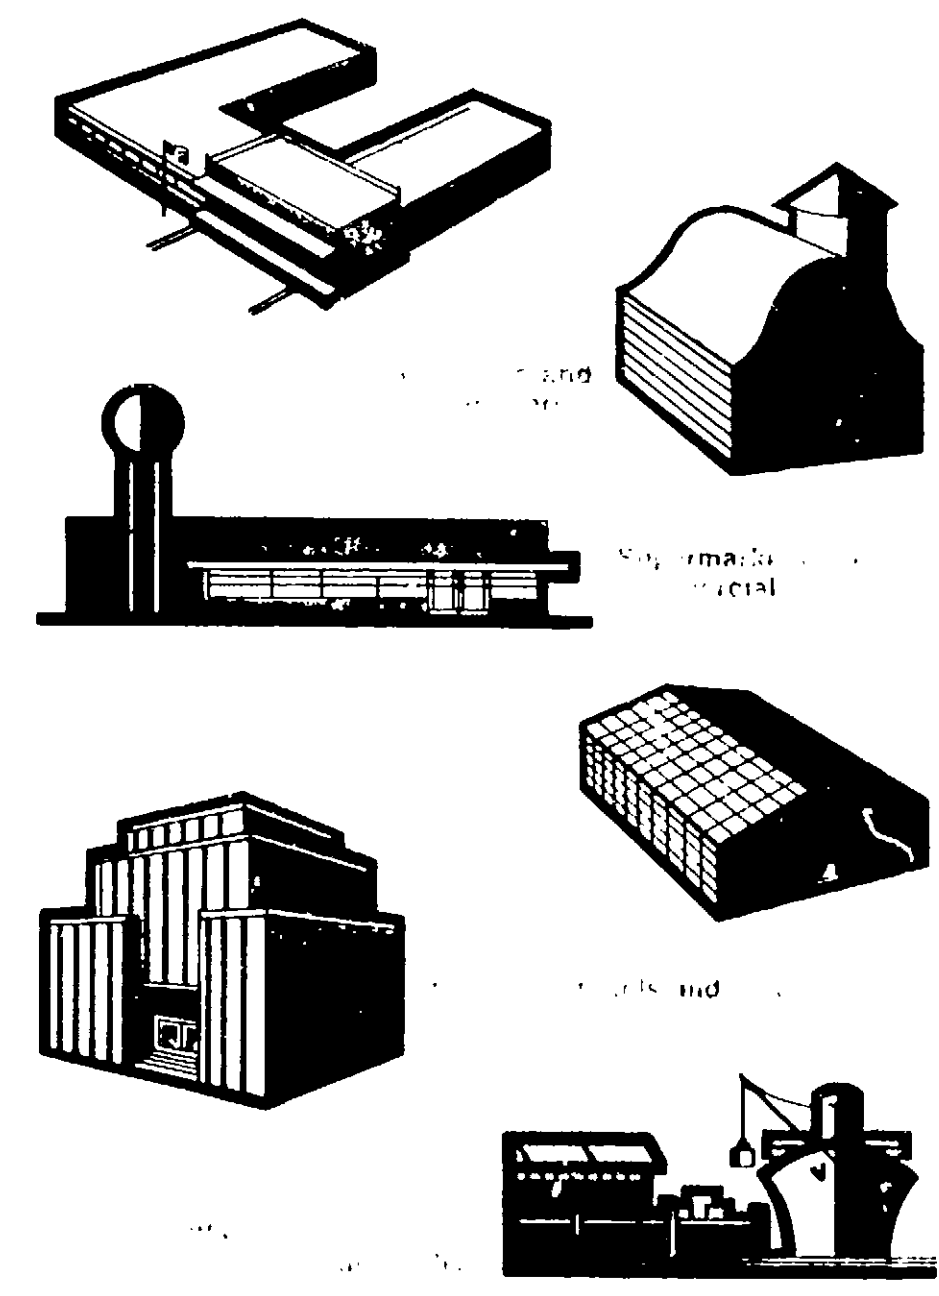

• ADJUSTABLE OUTPUT

• DIRECTION ADJUSTABLE TO 40° UPWARD AND 27° DOWNWARD FROM HORIZONTAL

• PARTICLE SIZE DOWN TO "14 MASS MICRON"

• TWO-STAGE VORTEX VENTURI NOZZLES

• FULL YEAR WARRANTY ON MAINTENANCE AND PARTS

For specific applications, write for complete information and prices on the FOGMASTER POW-R-JET and FOGMASTER CHALLENGER.



MANUFACTURED BY:
TEXAS INDUSTRIAL CHEMICALS, INC.
 1050-1070 Railroad Avenue — Beaumont, Texas
 PHONE: Beaumont (713) 838-3744 — Orange-Port Arthur (713) 735-5561

This DISINFECTANT is effective against a wide variety of gram-positive and gram-negative bacteria and pathogenic fungi.

This DISINFECTANT is also an excellent deodorant. It is especially advantageous to control odors that are bacterial in origin.

This DISINFECTANT mixes readily with water and makes a clear, stable solution. In use dilution, it is non-corrosive and non-staining to plastic, vinyl, synthetics, enamel, tile and most common metals. Has a pleasant lemon odor.

WARNING

KEEP OUT OF REACH OF CHILDREN. Causes eye or skin irritation. Do not get in eyes, on skin or on clothing. Harmful if swallowed. Avoid contamination of food. Avoid breathing spray mist.

FIRST AID: In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes. If irritation persists, get medical attention. Remove and wash contaminated clothing before reuse.

If swallowed, drink promptly a large quantity of milk or raw egg white. If these are not available, drink a large quantity of water. Avoid alcohol. Call a physician immediately.

Rinse empty container thoroughly with water and discard it.



Phenol Coefficient using A.O.A.C. method

- *Salmonella typhosa* — 15
- *Staphylococcus aureus* — 20
- *Escherichia coli* — 12

ACTIVE INGREDIENTS:

Alkyl (C ₁₄ , 58%; C ₁₆ , 28%; C ₁₂ , 14%)	
dimethyl benzyl ammonium chloride.....	4.0%
Isopropanol	2.0%
Essential oils	0.5%
Total Active Ingredients	6.5%

INERT INGREDIENTS: 93.5%

TOTAL INGREDIENTS 100.00%

WARNING:

KEEP OUT OF REACH OF CHILDREN
 (See side panel for additional precautions)

E.P.A. REG. NO. 13142-2

NET CONTENTS:

L-15

DIRECTIONS

Use in hospitals, public rooms, homes, restaurants, barber and beauty shops and pet animal quarters for general disinfection of walls, floors, glass, metal, plastic, porcelain, synthetics and finished wood surfaces and furnishings.

FOR DISINFECTION

1. Flush away surface soils with water where possible.
2. Clean with a solution of 2½ ounces of DISINFECTANT per gallon of water.
3. Rinse with clear water.
4. Apply disinfecting solution so as to thoroughly wet all surfaces. For non-porous, easily cleaned areas, make a disinfecting solution of 2½ ounces of DISINFECTANT per gallon of water. For porous surfaces, areas difficult to clean, or contagious disease areas, make a disinfecting solution using 5 ounces of DISINFECTANT per gallon of water.
5. Surfaces contacting food must be thoroughly rinsed after treatment. Otherwise, rinsing is not required.

FOR DEODORIZING

For garbage cans and similar refuse areas, use a solution of 8 ounces per gallon of water. Spray or wet all surfaces.

FOR MILDEW CONTROL

Use on enamel, porcelain, tile and plastics to control mildew. Follow directions for disinfection. Repeat treatment every seven days, or when new growth appears.