

CAUTION


KEEP OUT OF REACH OF CHILDREN

Harmful if swallowed. Avoid contact with skin and eyes. In case of contact, flush with plenty of water for at least 15 minutes. If eye irritation persists, get medical attention. Avoid contamination of food.

This product is toxic to fish. Treated effluent should not be discharged where it will drain into lakes, streams, ponds, or public waters. Do not contaminate water by cleaning of equipment or disposal of waste. Use only as directed on label. Do Not reuse container. Rinse empty container thoroughly with water and discard it.

April 3, 1973

14805-1

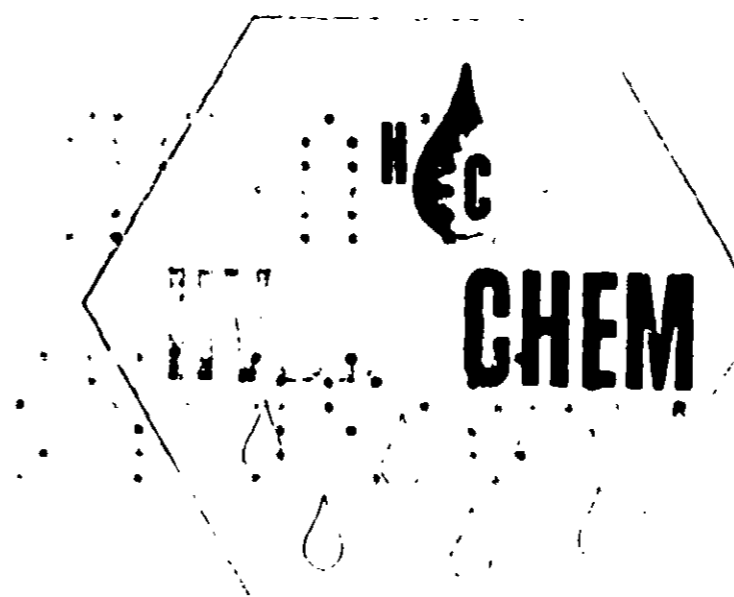

TOXSENE 39

MICROBIOCIDES

water treatment microbiocide for building and industrial water cooling towers

COMPOSITION

| | <u>PERCENT BY WEIGHT</u> |
|--------------------------------------------------------------------------------------------|--------------------------|
| <i>Active ingredient</i> | 20.0 % |
| <i>Poly[oxyethylene(dimethyliminio)ethylene-(dimethyliminio)ethylene dichloride]</i> | 20.0 % |
| <i>Inert ingredient</i> | 80.0 % |
| <i>Weight per gallon</i> | 8.69 pounds |
| <i>Weight of active ingredient per gallon</i> ... | 1.74 pounds |

EPA REGISTRATION NO. 14805-1

NET WEIGHT: 478 POUNDS NET VOLUME: 55 GALLONS


39

Microbiocide

To
ba
ir
to
re
sl
sl
ou
of
of
To
of
Re
ac
of
To
(6
to
2
qu
re
se
bl
in

04/26/97

14805-1

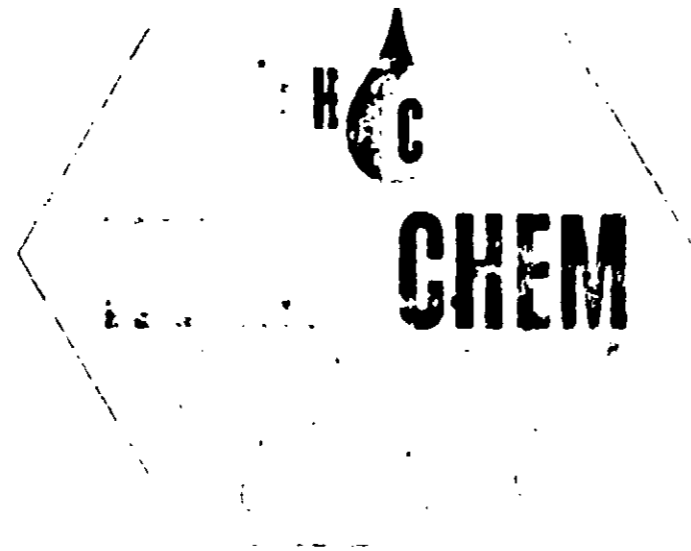

TOXSENE 39

MICROBIOCIDES

water treatment microbiocide for building and industrial water cooling towers

COMPOSITION

| | <u>PERCENT BY WEIGHT</u> |
|------------------------------------------------------------------------------------------------|--------------------------|
| <i>Active ingredient</i> | 20.0 % |
| <i>Poly[oxyethylene(dimethyliminio)ethylene (dimethyliminio)ethylene dichloride]</i> | |
| | 20.0 % |
| <i>Inert ingredient</i> | 80.0 % |
| <i>Weight per gallon</i> | 8.69 pounds |
| <i>Weight of active ingredient per gallon</i> ... | 1.74 pounds |

EPA REGISTRATION NO. 14805-1

NET WEIGHT: **478 POUNDS** NET VOLUME: **55 GALLONS**

APPLICATION

Toxsene 39 is used to control algae, bacteria and fungi in commercial and industrial water cooling towers. Prior to its use, systems must be cleaned to remove algae growth, microbiological slime and other deposits. An initial slug addition of 2.9 to 7.3 fluid ounces of Toxsene 39 per 1,000 gallons of water, to provide a concentration of 25 to 63 parts per million of Toxsene 39 based on the total weight of water in the system is recommended. Repeat initial dosage until control is achieved. Subsequent slug additions of 0.73 to 7.3 fluid ounces of Toxsene 39 per 1,000 gallons of water (6.3 to 63 parts per million of Toxsene 39) should be employed every 2 to 5 days or as needed. The frequency of addition depends on the relative amount of bleedoff and the severity of the microbiological problem. Slug additions should be made in the sump of water cooling towers.

39

Microbiocide