

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS
AND DOMESTIC ANIMALS
DANGER**


Do not take internally. Harmful if swallowed. Corrosive. Causes eye and skin damage. Avoid contact with eyes, skin or clothing. Wear goggles or face shield and rubber gloves when handling. Avoid breathing of vapor or spray mist. Use only with adequate ventilation. When used in confined areas or applied by spraying, wear a pesticide respirator jointly approved by the Mining Enforcement and Safety Administration (formerly the U.S. Bureau of Mines) and the National Institute for Occupational Safety and Health under the provisions of 30 CFR 11.

ENVIRONMENTAL HAZARDS

Do not contaminate water by cleaning of equipment or disposal of wastes.

PHYSICAL OR CHEMICAL HAZARDS

Flammable. Keep away from heat, sparks and open flame.

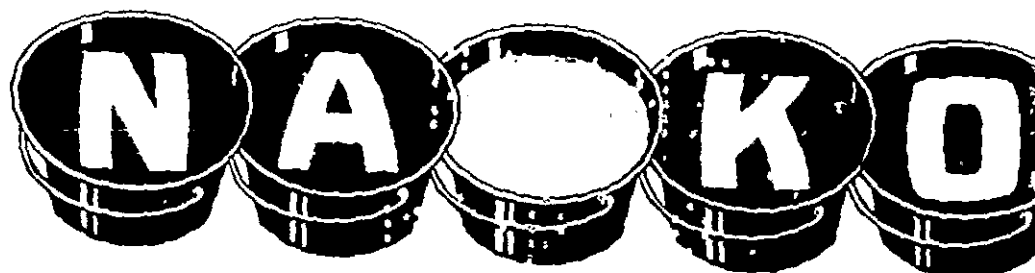

DURAVIN

TROPICAL ANTI-FOULING COMPOUND

8-3868 WHITE

ACCEPTED

SEP 15 1980

U.S. DEPT. OF AGRICULTURE
EPA REG. NO. 14826-TX 1

ACTIVE INGREDIENT - tributyltin fluoride	7.2%
INERT INGREDIENTS	92.8%
TOTAL	100.0%

KEEP OUT OF REACH OF CHILDREN

DANGER

SEE SIDE PANELS FOR ADDITIONAL PRECAUTIONARY STATEMENTS

EPA Registration No. 14826-b
EPA Establishment No. 14826-TX 1

NET CONTENTS 5 U.S. GALLONS (18.925 LITERS)

24

NAPKO CORPORATION - HOUSTON, TEXAS 77021 - FREMONT, CALIFORNIA 94538

BEST DOCUMENT AVAILABLE

STATEMENT OF PRACTICAL TREATMENT

swallowed —

Drink one or two glasses of water. Induce vomiting by placing finger in back of throat. Never breathe anything by mouth to an unconscious person. CALL A PHYSICIAN IMMEDIATELY.

in eyes —

Immediately flush with plenty of water for 15 minutes, then get medical attention.

on skin —

Wash thoroughly with soap and plenty of water immediately after contact. If irritation persists, get medical attention.

inhaled —

If affected, immediately remove to fresh air.

DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling. For use in commercial or Navy shipyards or on commercial marine structures only. For professional use only.

CLASSIFICATION:	Vinyl
USES:	Anti-fouling protective topcoat for properly prepared and primed steel, wood, aluminum, ferro-cement or fiberglass marine structures and ships hulls
FINISH:	Flat
COLOR:	White
APPLICATION:	Air or airless spray; brush for touch-up
COMPONENTS:	One
THINNING:	Up to 10% by volume with Napco 222 Thinner
DRYING TIME:	To Touch: 4 hours To Recoat: 16 to 24 hours To Launch: 24 hours
COVERAGE:	443 sq. ft./gal/mil (25 µm)
RECOMMENDED THICKNESS:	Wet: 7.5 to 11 mils (185 to 275 µm) Dry: 2.0 to 3.0 mils (50 to 75 µm)
WEIGHT PER GALLON:	9.3 lbs. (4.2 kg.)
FLASH POINT:	61°F (16°C)
CLEAN UP THINNER:	Napco 222 Thinner

STORAGE AND DISPOSAL

Storage—Do not store near heat, sparks or open flame. Keep closures tight and upright to prevent leakage. Keep container closed when not in use. In case of spillage, absorb with sawdust or disposable rags and flush with large volumes of water.

Disposal—Do not contaminate water, food or feed by storage or disposal. Open dumping is prohibited. Coating, clean-up materials or rinsate that cannot be used or chemically reprocessed should be disposed of according to procedures approved by Federal, State or Local disposal authorities. Do not reuse containers. Triple rinse (or equivalent) and dispose of in an approved landfill or bury in a safe place. Consult Federal, State or Local disposal authorities for approved alternative procedures.

25

PAINT

FOR INDUSTRIAL USE ONLY

BEST DOCUMENT AVAILABLE