


ECS TREATMENT NO. L-115

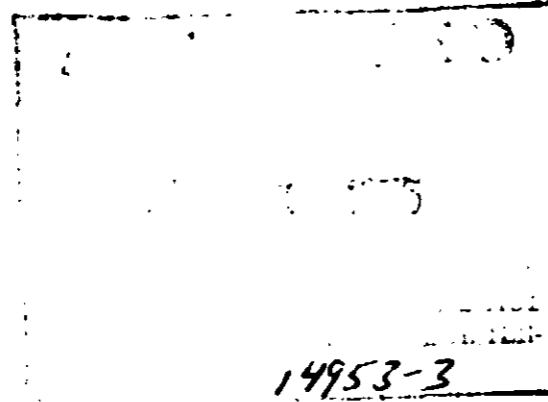

Comment

Active Ingredients: **3.0 per cent**

Sodium dimethyldithiocarbamate 2.76 per cent

Sodium 2-mercaptobenzothiazole 0.24 per cent

Inert Ingredients: **97.0 per cent**

Weight per gallon 8.46 lb.

weight per active ingredients per gallon 0.26 lb.

APPLICATIONS

Treatment No. L-115 is used to inhibit the growth of bacterial and fungal slimes in recirculating commercial and industrial cooling water systems. Before treatment with Treatment No. L-115, badly fouled systems must be cleaned to remove fungal and bacterial slimes and other deposits. Then the system should be treated with an initial slug addition of 210 ounces by weight (207 fluid ounces) of Treatment No. L-115 per 1,000 gallons of water in the system. Repeat the initial dosage until control is evident. Subsequent slug additions of 32 ounces by weight (31.5 fluid ounces) to 64 ounces by weight (63 fluid ounces) of L-115 per 1,000 gallons of water in the system should be made every 3 to 5 days as needed. The required frequency of treatment depends on the relative amount of bleedoff and the severity of the microbiological problems. Slug additions of Treatment L-115 should be made in the cooling tower basin, distribution decks or in the tower sump.

CAUTION

KEEP OUT OF THE REACH OF CHILDREN

May be harmful if swallowed or inhaled! May cause irritation of nose, throat and skin. Avoid contact with eyes, skin or clothing. Avoid breathing spray mist. In case of contact, flush with plenty of water. For eyes, get medical attention.

This product is toxic to fish. Keep out of lakes, streams and ponds. Do not contaminate water by cleaning of equipment, or disposal of wastes.

Do not reuse empty container. Return to drum reconditioner or destroy by perforating or crushing and discarding in a safe place away from water supplies.

MANUFACTURED BY

ENGINEERING CHEMICAL SERVICES, INC.

40 FULTON STREET

NEW BRUNSWICK, NEW JERSEY 08902

Net Weight

lbs.

EPA — Reg. No. 14953-3