

17876-5

US ENVIRONMENTAL PROTECTION AGENCY
OFFICE OF PESTICIDES PROGRAMS
REGISTRATION DIVISION (75-767)
WASHINGTON, DC 20460

EPA REGISTRATION
17876-5

DATE OF CHANGE
3/1/89

NOTICE OF PESTICIDE:

REGISTRATION
 REREGISTRATION

(Under the Federal Insecticide, Fungicide,
and Rodenticide Act, as amended)

TERM OF ISSUANCE
Conditional

NAME OF PESTICIDE PRODUCT

Exterior Stain and Wood Preservative
Semi Transparent Oil #2080 Tint Base

NAME AND ADDRESS OF REGISTRANT (Include ZIP code)

Bruning Paint Company
601 South Haven Street
Baltimore, MD 21224

NOTE: Changes in labeling formula differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Registration Division prior to use of the label in commerce. In any correspondence on this product always refer to the above U.S. EPA registration number.

On the basis of information furnished by the registrant, the above named pesticide is hereby Registered/Reregistered under the Federal Insecticide, Fungicide, and Rodenticide Act.

A copy of the labeling accepted in connection with this Registration/Reregistration is returned herewith.

Registration is in no way to be construed as an indorsement or approval of this product by this Agency. In order to protect health and the environment, the Administrator, on his motion, may at any time suspend or cancel the registration of a pesticide in accordance with the Act. The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others.

This product is conditionally registered in accordance with the provisions of Section 3(c)(7)(A) of the Federal Insecticide, Fungicide and Rodenticide Act, as amended (FIFRA), provided you:

1. Submit/cite all data required for registration/reregistration of your product under FIFRA section 3(c)(5) when the Agency requires all registrants of similar products to submit such data.

2. Make the labeling changes listed below before you release the product for shipment bearing the amended labeling:

- a. Add the phrase, "EPA Registration No. 17876-5."
- b. Change the signal word "WARNING" to "CAUTION" and revise precautionary language, as appropriate, for Category III toxicants, i.e., "Harmful if inhaled or absorbed through skin", etc.
- c. Under Environmental Hazards, change "Do not contaminate water by cleaning of equipment or disposal of wastes" to "Do not contaminate water when disposing of equipment washwaters".
- d. The statement "contains petroleum distillates" should appear immediately following the ingredient statement.

ATTACHMENT IS APPLICABLE

SIGNATURE OF APPROVING OFFICIAL

Luan Lewis

DATE

3/1/89

- d. The "Statement of Practical Treatment" section and associated information must appear on the front panel of the label immediately following "Keep Out of Reach of Children" and "CAUTION".
- e. Under the "Storage and Disposal" statement, expand the first sentence, "Do not store.....or open flame".


3. Submit five (5) copies of your final printed labeling before you release the product for shipment. Refer to the A-79 enclosure for a further description of final printed labeling.

If these conditions are not complied with, the registration will be subject to cancellation in accordance with FIFRA sec. 6(e). Your release for shipment of the product bearing the amended labeling constitutes acceptance of these conditions.


A stamped copy of the labeling is enclosed for your records.

Enclosures A/S

Sincerely,



Lois A. Rossi
 Product Manager (21)
 Fungicide-Herbicide Branch
 Registration Division (H7505C)

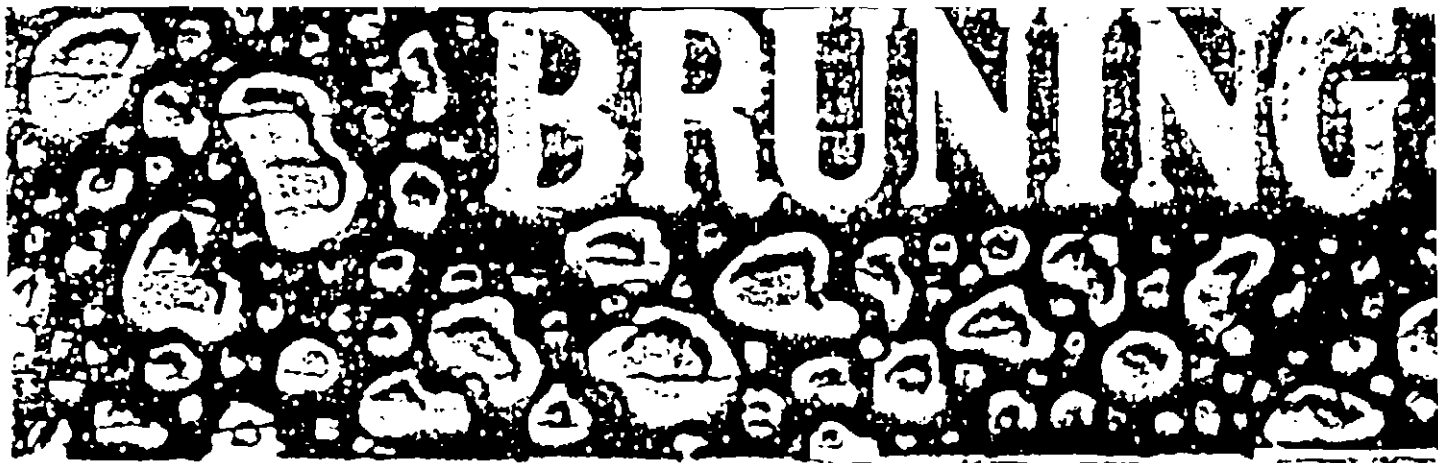

EXTERIOR STAIN WOOD PRESERVATION

SEMI-TRANSPARENT OIL

1 GALLON

2080 TINT BASE

NET WEIGHT: 6.97 lbs

ACTIVE INGREDIENTS:	
3-METHOXY-2-PROPENYL	
BUTYL CARBAMATE	0.58
INERT INGREDIENTS	99.42
FACTORY TOTAL	100.00

KEEP OUT OF REACH OF CHILDREN

WARNING

SEE BACK PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS

when handling, and rubber gloves and protective clothing when handling freshly treated lumber. Wash thoroughly with soap and water after handling. Remove contaminated clothing and wash before re-use.

STATEMENT OF PRACTICAL TREATMENT

IF ON SKIN: Wash with plenty of soap and water. Get medical attention if irritation persists.

IF SWALLOWED: Do not induce vomiting. Promptly drink a large quantity of milk, egg whites or gelatin solution; if these are not available, drink large quantities of water. Avoid alcohol. Get medical attention immediately.

IF INHALED: Remove victim to fresh air.

IF IN EYES: Flush with plenty of water. Get medical attention.

ENVIRONMENTAL HAZARDS

This product is toxic to fish. Do not apply directly to water. Do not contaminate water by cleaning of equipment or disposal of wastes.

PHYSICAL AND CHEMICAL HAZARDS

COMBUSTIBLE: Do not use, pour, or spill near heat or open flame. In case of fire, use water spray, foam, carbon dioxide or dry chemical.

APPLICATION: This product must be applied out-of-doors to wood intended for exterior use. Cut and machine wood prior to treatment if possible. If not, liberally apply two coats of preservative to all joints, cracks, cut-ends, holes or other openings. Apply by brushing, rolling, spraying, or dipping. Stir thoroughly before and during application.
NOTE: The final color effect obtained is influenced by the grain, texture, specie of wood, porosity, hardness, the natural color of the wood and the amount of stain applied. A sample brushout in an inconspicuous area is recommended. This product may be used over previously stained surfaces if the color is the same or lighter than the stain being used. **DO NOT MIX WITH ANY OTHER PRODUCT.** Do not apply when air or surface temperatures are below 48 F. Applying paints and stains often results in splashing or dripping. Cover desirable plants and shrubs to protect against possible injury. For best results and uniformity of appearance, retreat once every three years.

SPREADING RATE: 200 to 300 square feet per gallon depending upon the porosity of the surface and the method of application.

DRYING TIME: Dries to the touch in 8 hours, for recoating in 16-18 hours.

EQUIPMENT CLEAN-UP: Clean brushes, rollers, spray and other equipment immediately after use with mineral spirits or brush and roller cleaner.

IMPORTANT

This product will not kill existing mildew on the surface. Prior to staining test for mildew by applying a 50% solution of household chlorine bleach and water. If the application area lightens, mildew is present. Scrub the affected area with a solution of 1 qt. of household bleach 3 qts. of water. Rinse with clear water and let the surface dry before staining.

STORAGE AND DISPOSAL

STORAGE: Do not store near excessive heat.

DISPOSAL: Do not reuse container. Rinse thoroughly before discarding in trash. Securely wrap original container in several layers of newspaper and discard in trash.

BRUNING PAINT COMPANY

Baltimore, Md 21224

Pompano Beach, Fla 33069

ACCEPTED
with COMMENTS
in EPA Letter Detail

MAR 2 1989

Environmental Protection Agency
Washington, D.C. 20460
U.S. Environmental Protection Agency
Region 4, 1000 Peachtree St. N.E.
Atlanta, Georgia 30309

17876-5