A stamped copy of the product label is enclosed for your

PREVIOUS FOR THOMPS AND A SE

records.


EPA Form 8570-6 (Rev 5-76)

SIGNATURE OF APPROVING OFFICIAL

If these conditions are not complied with, the registration will be subject to cancellation in accordance with FIFRA section 6(e). Your release for shipment of the product constitutes acceptance of these conditions.



Ruth G. Douglas Product Manager (32) Antimicrobial Program Branch Registration Division (7505C)

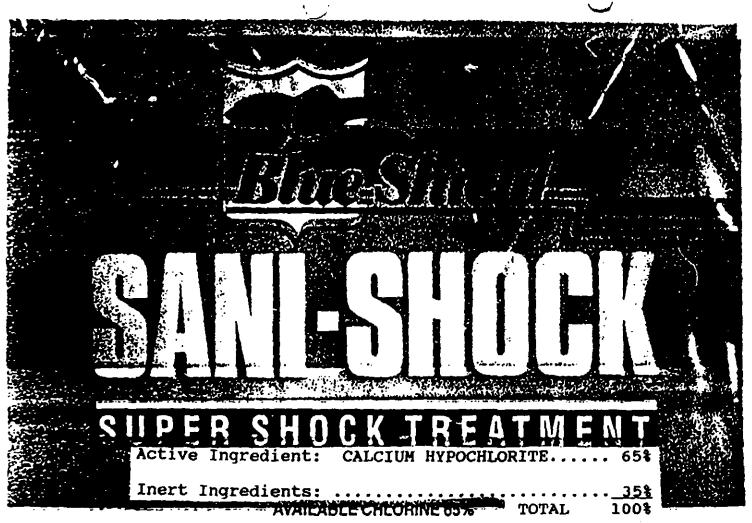

KEEP OUT OF REACH OF CHILDREN

DANGER

STATEMENT OF PRACTICAL TREATMENT (FIRST AID)*

IF CONTACT WITH EYES OCCURS,

flush with cold water for at least 15 minutes. Get medical attention.

IF CONTACT WITH SKIN,

trush off excess chemical and flush skin with cold water for at least 15 minutes,

If irritation persists, get medical attention.

IF SWALLOWED.

drink large quantities of water.

DO NOT,

induce vomiting. Call a physician or

poison control center immediately.


(see additional precauations on side panel) EPA REG. NO. 21268-11 EPA EST. NO. 21268-CT-01

OXIDIZER UN 2880

ACCEPTE

APR 2 9 1994

Fungicide, and Rodenticide as amended, for the pe registered under CPA Reg. No.

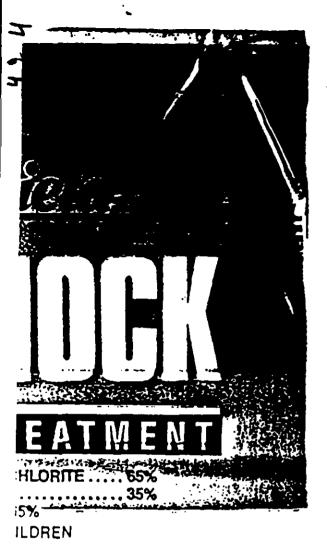

ENT (FIRST AID)*

:CURS.

Get medical attention.

water for at least 15 minutes attention.

iter.

mmediately. nel.)

T. NO. 52270-GA-01

LIREC LIONS FOR USE

IT IS A - LATION OF FEDERAL LAW TO USE THIS PROJECT IN A MANNER INCONSISTENT WITH ITS LABELING.

SWIMMING POOL WATER DISINFECTION

For a new pool or spring start-up, superchlorinate with 10 to 20 oz. of SANI-SHOCK for each 10,000 gallons of water to yield 5 to 10 ppm available chlorine by weight. Check the level of available chlorine with a test ldt. Adjust and maintain pool water pH to between 7.2 to 7.6. Adjust and maintain the alkalinity of the pool to between 50 to 100 ppm.

To maintain the pool, add manually or by a feeder device 2 oz. of SANI-SHOCK for each 10,000 gallons of water to yield an avallative chlorine residual between 0.6 to 1.0 ppm by weight. Stabilized pools should maintain a residual of 1.0 to 1.5 ppm available chlorine residual and alkalinity of the water frequently with appropriate test kits. Frequency of water treatment will depend upon temperature and number of swimmers.

Every 7 days, or se necessary, superchiorinate the pool with 10 to 20 oz. of SANI-SHOCK for each 10,000 gallons of water to yield 5 to 10 ppm available chloring by weight. Check the level of available chloring with a test lot. Do not reenter pool until the chloring rescues le between 1.0 to 3.0 pom.

At the end of the swimming pool season or when water is to be drained from the pool, chlorine must be allowed to dissipate from treated pool water before discharge. Do not chlorinate the pool within 24 hours prior to discharge.

WINTERIZING POOLS-While water is still clear & clean, apply 6 oz. of SANI-SHOCK per 10,000 gallons, while filter is running, to obtain a 3 ppm available chlorine residual, as determined by a sultable test kit. Cover pool, prepare heater, filter and heater components for winter by following manufacturers' instructions.

OTHER CALCIUM HYPOCHLORITE USES

Calcium Hypochlorite is also used for industrial purposes such as: sanitation of drinking water systems (algae and bacteria control) • treatment of waste water effluents (textile and paper mills, tanneries, petrochemical plants, etc.) • sanitization in the food industries • algae control in commercial and industrial cooling systems • others • for further information on Industrial uses see Samatec's "IDROKLOREL• CALCIUM HYPOCHLORITE DIRECTIONS FOR USE" and/or call 1800441 ENIMONT.

PRECAUTIONARY STATEMENTS—HAZARDS TO HUMANS AND DOMESTIC ANIMALS

DANGER: Highly corrosive. Causes aidn and eye damage. May be fatal if swallowed. Do not get in eyes, on skin or on clothing. Wear gogles or face shield and rubber gloves when handling this product. Irritating to nose and throat. Avoid breathing dust. Remove and wash contaminated clothing before reuse.

ENVIRONMENTAL HAZARDS

This pesticide is toxic to fish and aquatic organisms. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or public unters unless in accordance with the requirements of a Sational Pollutant Discharge Elimination System (MPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sever systems without previously notifying the local sewage treatment plant authority. For quidance, contact your State Water Board of Regional Office of the EPA.

PHYSICAL OR CHEMICAL HAZARDS

STRONG OXIDIZING AGENT: Mix only with water. Use clean dry utensils. Do not add this product to any dispensing device containing remnants of any other product. Such use may cause a violent reaction leading to fire or explosion. Contamination with moleture, organic matter or other chemicals will start a chemical reaction and generate heat, chlorine gas (and possible fire and explosion). In case of contamination or decomposition, do not reseal container. If possible, Isolate container in open or well ventilated area. Flood area with large volumes of water, if necessary.

STORAGE AND DISPOSAL Keep this product dry in a lightly closed container, when not in use. Store in a cool, dry, well ventilated area away from heat or open flame. In case of decomposition, isolate container (if possible) and flood area with large amounts of water to dissolve all material before discarding this container. Do not reuse empty container but place in trash collection. Do not contaminate lood or feed by storage, disposel, or cleaning of equipment.

Manufactured for: NORTH AMERICAN MARKETING GROUP, Manchester, CT

