

M-1 Additive Instruction Sheet #1

For Use With In-Store Additive/Colorant Dispensers

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling. Add 1.5 to 3 wt. ozs. per gallon (or 7.5 to 15 wt. ozs. per 5 gallons) depending on the anticipated severity of mildew. Mix thoroughly and use as directed. If the underlying surface to be coated is first pre-cleaned with a standard bleach solution, wait 36 hours before mixing and applying a paint, stain or coating to which M-1 has been added. M-1 is intended only for protecting the applied thin film of paint, stain or coating itself from mold and mildew attack. It is not intended to protect the surface underneath or near these coatings from mold or mildew attack. M-1 will not render the paint completely immune from mildew attack & growth. For retail, commercial, industrial, institutional, government & homeowner use.

Add M-1 Additive to all interior & exterior latex, oil & solvent base paints, stains & coatings using an in-store additive/colorant dispenser as shown in rate tables below depending on the calibration of dispenser and amount of M-1 desired.

To put "3 wt. ozs." of M-1 per gallon of paint or 15 wt. ozs. per 5 gallons of paint, "DISPENSE LIQUID" ounces as shown in table "A"

TABLE
"A"

3 wt. ozs. per gallon
15 wt. ozs. per 5 gallons

CALIBRATION	16ths.	32nds.	48ths.	64ths.
For 5's	10 ¹⁵ / ₁₆	10 ³⁰ / ₃₂	10 ⁴⁵ / ₄₈	10 ⁶⁰ / ₆₄
For 1's	2 ³ / ₁₆	2 ⁶ / ₃₂	2 ⁹ / ₄₈	2 ¹² / ₆₄
For Qts.	³ / ₁₆	⁶ / ₃₂	⁹ / ₄₈	¹² / ₆₄

To put "1.5 wt. ozs." of M-1 per gallon of paint or 7.5 wt. ozs. per 5 gallons of paint, "DISPENSE LIQUID" ounces as shown in table "B"

TABLE
"B"

1.5 wt. ozs. per gallon
7.5 wt. ozs. per 5 gallons

CALIBRATION	16ths.	32nds.	48ths.	64ths.
For 5's	5 ¹ / ₁₆	5 ² / ₃₂	5 ³ / ₄₈	5 ⁴ / ₆₄
For 1's	1 ¹ / ₁₆	1 ² / ₃₂	1 ³ / ₄₈	1 ⁴ / ₆₄
For Qts.	¹ / ₁₆	² / ₃₂	³ / ₄₈	⁴ / ₆₄

IMPORTANT: M-1 Additive must be agitated prior to being added to the Additive/Colorant Dispenser and stirred once daily while in dispenser. Follow manufacturer's operating instructions for dispensing the proper dose (see rate tables above).

STORAGE & DISPOSAL

If spilled wipe up with wet paper towel and put in trash. Do not reuse empty container. Securely wrap original container in several layers of newspaper and discard in trash.

THE JOMAPS CO.
6500 Industrial Way, Alpharetta, GA 30004

M-1[®]

ADDITIVE

KILLS & CONTROLS MILDEW

INHIBITS MOLD

FOR USE IN

ALL INTERIOR & EXTERIOR LATEX, OIL & SOLVENT BASE PAINTS, STAINS & COATINGS

Add Per Directions For Use

ACTIVE INGREDIENTS: Chlorothalonil (2,4,6,-tetra-
chloroisophthalonitrile).....51.8%
INERT INGREDIENTS.....48.2%
TOTAL.....100.0%

DANGER
KEEP OUT OF REACH OF CHILDREN
See Other Precautions On Back Panel

EPA Reg. No. 21346-2 EPA EST. No 21346-GA-1

1 U.S. Gallon Net Wt. 176 oz.

PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS & DOMESTIC ANIMALS
KEEP OUT OF REACH OF CHILDREN

DANGER

Corrosive. Causes irreversible eye damage. Harmful if swallowed or absorbed through skin. Wear protective glasses. Do not get in eyes, on skin or on clothing. This product may cause an allergic skin reaction. Wash thoroughly with soap and water after handling. Remove contaminated clothing and wash before reuse.

FIRST AID

If in eyes: Flush with water for 15 minutes. Get medical attention. If on skin: Wash thoroughly with soap and water. If swallowed: Drink promptly a large quantity of milk, egg whites, gelatin solution, or if these are not available, drink large quantities of water. Get medical attention. Avoid alcohol. Do not give anything by mouth to an unconscious person. **NOTE to Physician:** Persons having an allergic reaction respond to treatment with antihistamines or steroid creams and/or systemic steroids. Probable mucosal damage may contraindicate the use of gastric lavage.

PHYSICAL OR CHEMICAL HAZARDS

Do not use or store near heat or open flame.

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.


For Smaller Product Sizes (1.5 wt. oz., 3 wt. oz., 7.5 wt. oz., 15 wt. oz.) - Knead tube with fingers to mix. Add 1.5 to 3 wt. ozs. per gallon depending on the anticipated severity of mildew. Mix thoroughly and use as directed. If the underlying surface to be coated is first pre-cleaned with a standard bleach solution, wait 36 hours before mixing and applying a paint, stain or coating to which M-1 has been added. M-1 is intended only for protecting the applied thin film of paint, stain or coating itself from mold and mildew attack. It is not intended to protect the surface underneath or near these coatings from mold or mildew attack. M-1 will not render the paint completely immune from mildew attack & growth. For retail, commercial, industrial, institutional, government & homeowner use.

For Use With In-Store Additive/Colorant Dispensers (Small or 1 Gallon Product Sizes) - See the "M-1 Additive Instruction Sheet #1, For Use With In-Store Additive/Colorant Dispensers".

STORAGE & DISPOSAL

If spilled wipe up with wet paper towel and put in trash. Do not reuse empty container. Securely wrap original container in several layers of newspaper and discard in trash.

THE JOMAPS CO.
6500 Industrial Way, Alpharetta, GA 30004
770-42-8888

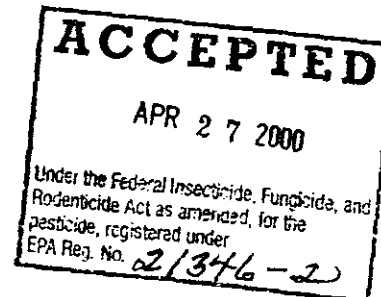

21346-2

04/27/2000

1/1