
## DIRECTIONS

This product is intended for use on bare ground in small enclosed industrial areas such as tank farms and substations. Apply a dilution of 2 pints of Sodium Arsenite Solution 40% to nine (9) gallons of water per 1000 square feet. Areas to be covered by pavement after treatment, Dilute 2 gallons of Sodium Arsenite 40% to nine (9) gallons of water per 1000 square feet. Do not apply where runoff is likely to occur. Do not contaminate water by cleaning of equipment, or disposal of wastes. Apply this product only as specified on this label.

This product is toxic to fish and wildlife. Birds, and other wildlife in treated areas may be killed. Keep out of any body of water. Apply this product only as specified on this label. Do not apply when weather conditions favor drift of spray from areas treated. Bo not apply to areas underlaid by roots of desireable trees and shrubs.

## SHARP SODIUM ARSENITE SOLUTION 40 PERCENT

DANGER: KEEP OUT OF REACH OF CHILDREN

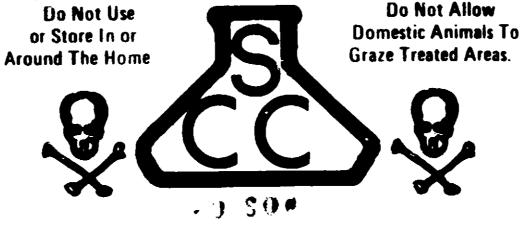

See antidote statement and other required warning statements.

MANUFACTURED BY:

SHARP CHEMICAL COMPANY
5921 Plainview
Houston, Texas 77017

EPA Reg. No. 22058-2

## **INGREDIENTS**

ACTIVE INGREDIENTS  Sodium Arsenite
INERT INGREDIENTS Water
Total Arsenic (All Water Soluble) expressed as metallic
Contains 4 pounds of Sodium Arsenite per gallon.
ANTIDOTE: Give a tablespoon of salt in a glass of warm water and repeat until vomit fluid is clear. Then give two (2)

WARNING: Avoid contact with skin, eyes, or clothing, Wash thoroughly after using. Avoid breathing spray mist Poisonous if swallowed.

tablespoons of Epsom Salt or Milk of Magnesia in water, and

plenty of milk and water. Have victim lie down and keep quite.

Call a physician immediately.

