

1
3

APPLICATION SITE

Can be used to preserve both interior and exterior wood. Interior use is only needed when wood is subject to frequent or prolonged wetting (e.g. condensation or rain seepage). Can be used for above ground, ground contact and below ground uses. Below ground or ground contact use requires a minimum 5 minute dip. For even further protection, dip for one hour. Wood to be treated should be dry and well seasoned. Fence posts must have bark removed. For fence posts, finished timbers to be buried in soil, immersion for 12-48 hours provides long-term protection (pine species may be adequately penetrated in 6-8 hours). Deck timbers should be immersed 15-30 minutes per inch of thickness, except in case of pine species which absorbs the preservative at a faster rate. For above ground use, apply two brush coats or dip for 3 minutes per inch of thickness. All wood should be treated after all cuts are made and before use in the structure.

WOOD PRESERVATIVE USES

Protects the following types of wood: shingles, millwork, windows, outdoor furniture, docks, piers, posts, pilings, block flooring, staking material, decks, spars, house siding. Protects wood in all the above applications including nursery lumber, slats, and beehive crates.

PHYSICAL PROTECTION

Inhibits warping, shrinking, swelling, checking, cracking, water marking of the wood. Can be stained or painted after drying for 24 hours. For wood containing resins and other materials weathering will enhance paint adhesion. This colorless product offers a penetrating fungicide which will not bloom.

COVERAGE

100-300 square feet - depending on porosity of wood and method of application.

PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS AND DOMESTIC ANIMALS

CAUTION

FIRST AID PROCEDURE

Harmful if swallowed or absorbed through skin. Avoid contact with eyes, on skin or on clothing. Wash thoroughly after handling.

IF SWALLOWED, do not induce vomiting. CALL PHYSICIAN IMMEDIATELY. — IF ABSORBED THROUGH SKIN, Wash thoroughly with soap and water. — IF IN EYES, Flush with plenty of water and get immediate medical attention. — CONTAMINATED CLOTHING should be removed and washed thoroughly before reusing.

ENVIRONMENTAL HAZARDS

This product is toxic to fish. Do not apply directly to water. Do not contaminate water by cleaning of equipment or disposal of wastes. Apply this product only as specified on the label.

PHYSICAL OR CHEMICAL HAZARDS

Use only with adequate ventilation. Close container after each use.

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

STORAGE AND DISPOSAL

Storage: Product will freeze. Store at temperatures between 40° & 100° F. If the product has been soiled or is leaking remove source of spill or leak. Recover free liquid. Spread absorbent, then pick up and place in containers. Where applicable, wash area with detergent and soap. Store product in original container only. Do not store with fertilizers, food and feed. Keep container closed when not in use.

Container Disposal: Do not empty container. Wrap container and put into trash collection.

NOTES TO USER

Do not apply over painted or varnished surfaces. Do not apply over bark. Do not use on redwood. Do not use on wood intended for food, feed, potable water, livestock or dairy animals contact surfaces. May injure living plants during application. Cover plants to protect against direct contact.

Distributed by


IOWA PAINT

MANUFACTURING COMPANY, INC.

GENERAL OFFICES: DES MOINES, IOWA 50309

PROTECTS & PRESERVES WOOD AGAINST

- MOLD
- MILDEW
- ROT
- WOOD-DESTROYING FUNGI
- MILDEW STAIN
- ATTACK BY TERMITES

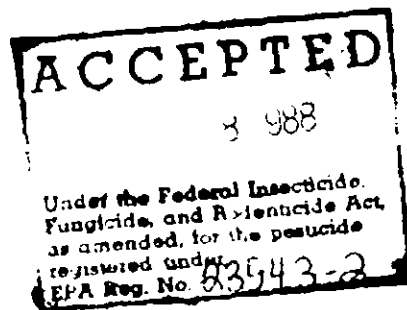

Information FROM THE...
DIRECT...
in...
10074

WOOD-SAVER

EPA REG. NO. 9630-18-23543
EPA EST. NO. 9630-PA-01



ACTIVE INGREDIENT	
Zinc naphthenate*	15.7%
INERT INGREDIENTS	84.3%
TOTAL	100.0%

*(Equivalent to 2% Zinc Metal)

PRODUCT WEIGHT PER GALLON - 8.3 LBS

CONTROL NO.
4809-118

KEEP OUT OF REACH OF CHILDREN
CAUTION

See other precautionary statements
on back panel

One U.S. Gallon