

23566-6
06/05/03

ACCEPTED

JUN 05 2003

Under the Federal Insecticide, Fungicide, and
Rodenticide Act as amended, for the
pesticide, registered under
EPA Reg. No. 23566-6

FIBERGLASS ANTI-FOULING BOTTOM PAINT

HATTERAS

610 RED

ACTIVE INGREDIENT:
CUPROUS OXIDE 25%
INERT INGREDIENTS: 75%
TOTAL 100%
EPA REG NO. 23566-6 2693-NJ-1
EPA ESTABLISHMENT 23566-NJ-1
CONTAINS PETROLEUM DISTILLATES

**KEEP OUT OF REACH OF CHILDREN
WARNING**

**SEE BACK PANEL FOR
ADDITIONAL CAUTIONS**

DISCLAIMER: The performance of any marine paint or coating depends on many factors outside the control of our company including surface preparation, proper application, and environmental condition. Therefore, we cannot guarantee the product's suitability for your particular purpose or application. Implied warranties or fitness for a particular purpose and of merchantability are excluded. We shall not, under any circumstances, be liable for incidental or consequential damages. By purchase or use of this product, buyer agrees that the sale and exclusive remedy, if any, is limited to the refund of the purchase price or replacement of the product, at the company's option.

DIRECTIONS FOR USE:
IT IS A VIOLATION OF FEDERAL LAW TO USE THIS PRODUCT IN A MANNER INCONSISTENT WITH ITS LABELING.

STORAGE AND DISPOSAL:
STORE IN A DRY AREA AWAY FROM HEAT AND SEVERE COLD. KEEP PARTIALLY USED CONTAINER TIGHTLY SEALED. DO NOT CONTAMINATE WATER, FOOD OR FEED BY STORAGE OR DISPOSAL.

PESTICIDE DISPOSAL:
PESTICIDE WASTES ARE TOXIC. IMPROPER DISPOSAL OF EXCESS PESTICIDES OR RESIDUE IS A VIOLATION OF FEDERAL LAW. THESE WASTES CANNOT BE DISPOSED OF BY USE ACCORDING TO THE LABEL INSTRUCTIONS. CONTACT YOUR STATE PESTICIDE OR ENVIRONMENTAL CONTROL AGENCY, OR HAZARDOUS WASTE REPRESENTATIVE AT THE NEAREST EPA REGIONAL OFFICE FOR GUIDANCE.

CONTAINER DISPOSAL:
TRIPLE RINSE CONTAINER, THEN OFFER IT FOR RECYCLING OR RECONDITIONING, OR PUNCTURE AND DISPOSE OF IN AN APPROPRIATE LANDFILL OR BY OTHER PROCEDURES APPROVED BY STATE AND LOCAL AUTHORITIES.



**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND
DOMESTIC ANIMALS**

Causes eye irritation. Harmful if absorbed through skin. Avoid contact with skin, eyes, or clothing. Wear protective clothing such as gloves, long sleeved cotton shirt, long pants and hat. May be fatal if swallowed or inhaled. Do not breathe dust, vapor, or spray mist. Wear a mask or respirator jointly approved by the Mining Enforcement and Safety Administration and by the National Institute for Occupational Safety and Health while sanding boat surfaces. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

FIRST AID

If Swallowed:

- Immediately call a poison control center or doctor.
- Do not induce vomiting unless told to do so by a poison control center or doctor.
- Do not give any liquid to the person.
- Do not give anything by mouth to an unconscious person.

If on skin or clothing:

- Take off contaminated clothing.
- Rinse skin immediately with plenty of water for 15-20 minutes.
- Call a poison control center or doctor for treatment advice.

If inhaled:

- Move person to fresh air.
- If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth if possible.
- Call a poison control center or doctor for further treatment advice.

If in eyes:

- Hold eye open and rinse slowly and gently with water for 15-20 minutes.
- Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye.
- Call a poison control center or doctor for treatment advice.

Other: Have the product container or label with you when calling a poison control center or doctor or going for treatment.

Note to Physician: Contains petroleum distillate – vomiting may cause aspiration pneumonia.

ENVIRONMENTAL HAZARDS

This paint is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust from paint removal to enter water. Dispose of paint in an approved landfill.

PHYSICAL AND CHEMICAL HAZARDS

Do not use or store near heat or open flame.


PRODUCT DESCRIPTION: This product provides antifouling protection against barnacles, algae and hydroids in salt and fresh water on boat bottoms only. Its modified



ACCEPTED

JUN 05 2003

Under the Federal Insecticide, Fungicide, and Rodenticide Act as amended, for the pesticide, registered under EPA Reg. No. 23566-6

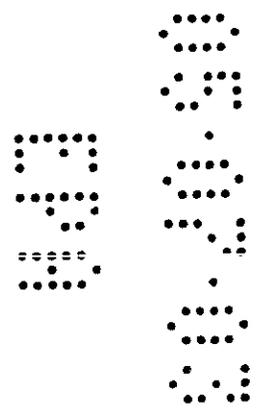

epoxy base renders a hard, smooth finish with durability and abrasion resistance. It has universal application over all types of properly prepared bottom paints (except aluminum). For use on fast fiberglass boats, as well as wood and steel hulls, where a tougher than normal coating is desired. May be burnished even smoother for racing sail and power boats.

SURFACE PREPARATION: Surface must always be clean, dry and properly prepared prior to painting. Failure to do so will lead to eventual blistering and/or peeling. All sanded surfaces must be wiped clean with 551 Dewaxer to remove sanding residue.

GENERAL APPLICATION: For use on boats below the true waterline. Can be brushed or rolled on fiberglass, wood, steel and previously painted surfaces per application systems below. Do not use on aluminum. Two (2) coats are recommended for best performance.

MIXING AND THINNING: Shake or mix thoroughly and stir continuously while using. When applying with brush or roller, do not thin bottom paint.

THEORETICAL COVERAGE: Depending on surface and conditions, one gallon of bottom paint will usually cover over 350 square feet of surface when brushed or rolled.

CLEAN UP: Use 551 Reducer/Thinner for cleaning equipment and paint brushes.

Estimated Dry Times: Bottom paints are designed for overcoating after an overnight dry. Prior to launching, allow a minimum dry of overnight and maximum of 60 days. If drying conditions are poor, or if paint was applied too thickly, longer periods of drying

will be required. Fresh coats of paint must be thoroughly dry before overcoating.

YEARLY REPAINTING: Scrub bottom clean at haul-out. Repaint only if old paint is sound and tight; if not, remove it by sanding or with paint remover. If old paint is rough, sand it with 100-150 grit sandpaper. Prepare seams, nicks and chips as below. Spotcoat any scuffs with antifoulant. Apply 1-2 coats of antifoulant.

ON BARE WOOD: If seams are not flush, fill them with seam compound. Dry several days until skin forms. Do not sand. Fill nicks with trowel cement, dry hard, sand, apply 173 Undercoat Primer, then apply two coats of antifoulant.

ON BARE FIBERGLASS: Dewax by washing with 551 Dewaxer, remove dissolved wax at once with clean paper towels or rags; repeat; sand hard to a dull finish with 80-100 grit sandpaper. Fill any chips with trowel cement, dry hard, sand. Apply 179 No Sand Primer or 173 White Undercoater Primer, then apply two coats of antifoulant.

ON BARE STEEL: Sandblast surface to a near white metal. Remove blast residue with a broom and airhose. Wipe off with 551 Dewaxer. Do not sand. Fill in any imperfections with fairing compound. Sand smooth and wipe clean. Apply 3 coats of 408 Red Lead Primer or B304 2 Part Red Epoxy Primer, followed by two coats of bottom paint.

INTERNATIONAL PAINT INC.
2270 Morris Ave., Union, NJ 07083
(800) 746-3995

ACCEPTED

JUN 05 2003

Under the Federal Insecticide, Fungicide, and
Rodenticide Act as amended, for the
pesticide registered under
EPA Reg. No. 255-66-6

