

CAUTION
KEEP OUT OF REACH OF CHILDREN
SEE PRECAUTIONS ON BACK LABEL

U.S. YACHT PAINT

NET 32 FL. OZ. (1 QT.)

tropical anti-fouling


620 FLORIDA COPPER RED

FOR FIBERGLASS & WOOD BOTTOMS

SOFT, CHALKING, AF VERY GOOD, THINNER 950

#620
ACTIVE INGREDIENT
CUPROUS OXIDE 35.0%
INERT INGREDIENTS 65.0%
100.0%
EPA REG. NO. 23566-9

EPA EST. NO. 23566-NJ-1

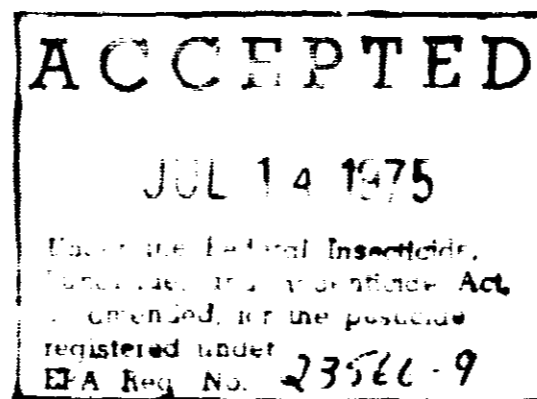

This paint is an antifouling paint for Fiberglass and Wood boat bottoms, available in several colors (see Color Card). It is designed for use under salt water fouling conditions. It brushes easily, and is suitable for amateur as well as professional use.

This paint can be applied by brush or roller. Use the Thinner listed on front of label for thinning if needed for good brushing, and for clean-up. On NEW FIBERGLASS (wax washed off with any paint thinner, and well sanded to a flat finish with 80-150 grit paper) apply 2 coats. On NEW WOOD (sanded clean and smooth with 80-150 grit paper) apply 2-3 coats. For annual repainting on OLD PAINT (scrubbed clean, if sound and tight, well sanded, if rough, or "wooded" by sanding or paint remover, if much peeling exists) spot-coat any bare spots, and then apply 1-2 coats. Use a respirator when sanding. Do not sand between coats, and wait 6 hours before the next coat. For best results launch boat 2-3 days after last coat, however a delayed launch will still give good results.

This paint can be applied over most old paints. To be sure, apply a small test patch near keel and observe for 15 minutes to see if "lifting" occurs.

CAUTION

HARMFUL IF SWALLOWED; MAY CAUSE SKIN IRRITATION
MAY BE ABSORBED THROUGH SKIN

If ingested, do not induce vomiting; drink milk; see doctor. Do not breathe vapors. If in eyes, skin, or clothing, remove contaminated clothing and immediately wash skin with soap and water; for eyes, flush only with plenty of water; if in eyes, get medical attention. Wash contaminated clothing before reuse.

DO NOT USE IN OR ON GRILL OR STORE NEAR HEAT OR OPEN FLAME

Store in original container. Do not reuse container, especially when empty. Do not pour or spill into cleaning of equipment or disposal of wastes.

U.S. YACHT PAINT CO., ROSELAND, N.J. U.S.A.