

US ENVIRONMENTAL PROTECTION AGENCY OFFICE OF PESTICIDES PROGRAMS REGISTRATION DIVISION (TS-767) WASHINGTON, DC 20460	EPA REGISTRATION NO.	DATE OF ISSUANCE
	23566-11	MAY 04 1988
NOTICE OF PESTICIDE: <input type="checkbox"/> REGISTRATION <input type="checkbox"/> REREGISTRATION <i>(Under the Federal Insecticide, Fungicide, and Rodenticide Act, as amended)</i>	TERM OF ISSUANCE	
	NAME OF PESTICIDE PRODUCT	
U.S. Yacht 670 Red Co-Poly Copper		
NAME AND ADDRESS OF REGISTRANT (Include ZIP code)		
U.S. Yacht Paint Company Box 96 Roseland, NJ 07068		
<p>NOTE: Changes in labeling formula differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Registration Division prior to use of the label in commerce. In any correspondence on this product always refer to the above U.S. EPA registration number.</p> <p>On the basis of information furnished by the registrant, the above named pesticide is hereby Registered/Reregistered under the Federal Insecticide, Fungicide, and Rodenticide Act.</p> <p>A copy of the labeling accepted in connection with this Registration/Reregistration is returned herewith.</p> <p>Registration is in no way to be construed as an indorsement or approval of this product by this Agency. In order to protect health and the environment, the Administrator, on his motion, may at any time suspend or cancel the registration of a pesticide in accordance with the Act. The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others.</p> <p>This product is conditionally registered in accordance with FIFRA section 3(c)(7)(A) provided that you</p> <ol style="list-style-type: none"> 1. Submit and/or cite all data required for registration/reregistration of your product under FIFRA section 3(c)(5) when the Agency requires all registrants of similar products to submit such data. 2. Make the labeling changes listed below before you release the product for shipment: <ol style="list-style-type: none"> a. Add the phrase "EPA Registration No. 23566-11." b. Delete the words "Spray mist" from the right panel, first paragraph sentence, "Avoid breathing vapor, <u>spray mist</u>, or sanding dust" because there are no use directions for spray application of this product. 3. Submit five (5) copies of your final printed labeling before you release the product for shipment. Refer to the A-79 enclosure for a further description of final printed labeling. <p><input type="checkbox"/> ATTACHMENT IS APPLICABLE</p>		
SIGNATURE OF APPROVING OFFICIAL		DATE

23566-11

-2-

If these conditions are not complied with, the registration will be subject to cancellation in accordance with FIFRA section 6(e). Your release for shipment of the product constitutes acceptance of these conditions.


A stamped copy of the label is enclosed for your records.

John H. Lee
Product Manager (31)
Disinfectants Branch
Registration Division (TS-767C)

Enclosures

U. S. YACHT

a fine paint PAINT *for fine boats*

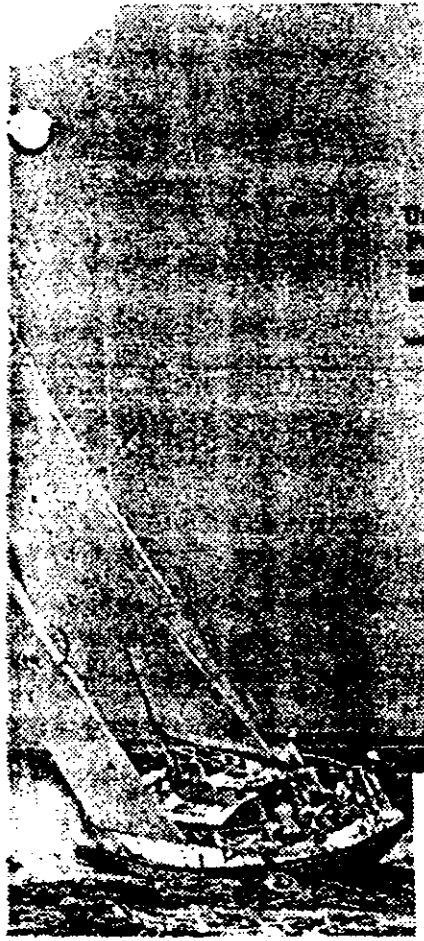

ACCEPTED
with COMMENTS
in EPA Reg. No. 23566-1

MAY 0 1974

Under the Federal Insecticide, Fungicide, and Rodenticide Act as amended for the pesticide manufactured under EPA Reg. No. 23566-11

670 RED CO-POLY COPPER

ACTIVE INGREDIENTS:	
Cuprous Oxide	45.00%
Tributyltin Methacrylate (as part of a polymer)	11.81%
INERT INGREDIENTS:	4.19%
TOTAL:	100.00%
TOTAL TIN CONTENT:	3.75%

EPA REGISTRATION NO. 23566-

CONTAINS PETROLEUM DISTILLATES

**KEEP OUT OF REACH OF CHILDREN
DANGER**

STATEMENT OF PRACTICAL TREATMENT

IF SWALLOWED: Quickly drink lots of milk, egg white, or gelatin; if none are available, drink lots of water. Avoid alcohol. Get medical attention. Note to Doctor—Probable mucosal damage may contraindicate the use of gastric lavage.

IF IN EYES: Quickly flush with lots of water. Get medical attention.

IF INHALED: Remove victim to fresh air. If not breathing, give artificial respiration, preferably mouth-to-mouth, get an ambulance.

IF ON SKIN: Remove with thinner-damp rag. Wash with soap and water. Get medical attention.

SEE BACK PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS

U S YACHT PAINT COMPANY, ROSELAND, NJ, USA

ESTABLISHMENT NO. 23566-NJ-1

NET CONTENTS 1 GALLON



PRECAUTIONARY STATEMENTS
DANGER

HAZARDS TO HUMANS AND DOMESTIC ANIMALS

Corrosive. Causes skin burns. Wear protective clothing, such as gloves, long-sleeved cotton shirt, long pants, and hat. Causes eye irritation. May be fatal if swallowed. Harmful if absorbed thru skin or inhaled. This product may be a dermal sensitizer. Avoid contact with skin, eyes, or clothing. Avoid breathing vapor, spray mist, or sanding dust. While sanding or dusting wear a respirator jointly approved by the Mining Enforcement and Safety Adm. and the Nat. Institute for Occupational Safety and Health. Wash thoroughly with soap and water after handling and before eating or smoking. Use with adequate ventilation.

ENVIRONMENTAL HAZARDS

This paint is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust from paint removal to enter water. Dispose of paint in an approved landfill.

PHYSICAL AND CHEMICAL HAZARDS

Flammable. Keep away from heat and open flame.

DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

STORAGE AND DISPOSAL

Keep cans dry to prevent rusting. Do not contaminate water, food, or feed by storage or disposal. Pesticide Disposal: Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or Hazardous Waste representative at the nearest EPA Regional Office for guidance. Container Disposal: Triple wash container, then offer it for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

U S Yacht CO-POLY COPPER is an antifoulant for use on fiberglass and wood boat bottoms (not on metal) for the control of algae, barnacles, bryozoans, hydroids, and tunicates in salt water; and for algae in fresh water. Co-Poly Copper combines cuprous oxide with tributyltin methacrylate for controlled release of toxicants by hydrolysis. The paint is slowly polished off without becoming porous, so its effective life is directly related to the number of coats applied. Polishing occurs faster at the waterline, so an extra coat there is desirable. Co-Poly Copper will adhere well only over hard, tight antifoulants; not over soft, porous ones. Coverage is about 400 square feet per gallon. Mix very thoroughly. Use Brushing Thinner if needed for good brushing, and for cleanup. Apply with brush or roller. Use a respirator when sanding or dusting. Sanding between coats is not necessary for good adhesion. Dry at least 1 day between coats and before launch. Launching may be delayed as there is no loss of strength ashore.

REPAINTING

Scrub bottom at haul-out. Repaint with Co-Poly Copper only if old paint is hard and tight; if not remove it by sanding or with Paint Remover. If old paint is rough, sand it with 100-150 grit sandpaper, dust. Prepare seams and nicks as below. Spot-coat any scuffs with Co-Poly Copper. Apply 1 coat of Co-Poly Copper at waterline, then apply 1 or more coats overall.

ON BARE FIBERGLASS

(If boat is new, or wax suspected, dewax by washing with Fiberglass Wax Remover or Brushing Thinner, remove dissolved wax at once with clean paper towels; repeat.) Sand hard to a dull finish with 80-100 grit sandpaper, dust. Fill any nicks with Trowel Cement, dry hard, sand, dust. Apply 1 coat of Epoxy Undercoat, dry. Apply 1 coat of Fiberglass No-Sanding Primer, dry. (Or, in place of the Epoxy & No-Sanding Primer, apply 1 coat of Coal Tar Epoxy, dry.) Apply 1 coat of Co-Poly Copper at waterline, then apply 2 or more coats overall.

ON BARE WOOD

(If seams are not flush, fill them with Seam Compound, dry 1-4 days until skin forms, do not sand.) Fill any nicks with Trowel Cement, dry hard, sand, dust. Apply 1 coat of Co-Poly at waterline, then 2 or more coats overall.