

US ENVIRONMENTAL PROTECTION AGENCY
OFFICE OF PESTICIDES PROGRAMS
REGISTRATION DIVISION (75-767)
WASHINGTON, DC 20460

EPA REGISTRATION NO.

23566-13

DATE OF ISSUANCE

MAR 23 1989

TERM OF ISSUANCE

NOTICE OF PESTICIDE: REGISTRATION
 REREGISTRATION

(Under the Federal Insecticide, Fungicide,
and Rodenticide Act, as amended)

NAME OF PESTICIDE PRODUCT

650 Red Copperpoxy

NAME AND ADDRESS OF REGISTRANT (Include ZIP code)

U.S. Wood-Boring Company, Inc.

P.O. Box 100

10000 Woodbridge, VA 22191

NOTE: Changes in labeling formula differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Registration Division prior to use of the label in commerce. In any correspondence on this product always refer to the above U.S. EPA registration number.

On the basis of information furnished by the registrant, the above named pesticide is hereby Registered/Reregistered under the Federal Insecticide, Fungicide, and Rodenticide Act.

A copy of the labeling accepted in connection with this Registration/Reregistration is returned herewith.

Registration is in no way to be construed as an indorsement or approval of this product by this Agency. In order to protect health and the environment, the Administrator, on his motion, may at any time suspend or cancel the registration of a pesticide in accordance with the Act. The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others.

This product is conditionally registered in accordance with FIFRA section 3(c)(7)(A) provided that you:

1. Submit and/or cite all data required for registration/reregistration of your product under FIFRA section 3(c)(5) when the Agency requires all registrants of similar products to submit such data.

2. Make the labeling changes listed below before you release the product for shipment:

- a. Add the phrase "EPA Registration No. 23566-13."
- b. In the first paragraph right panel, introduce the words "while sanding boat surface" into the sentence (Do not breathe dust or vapor) "While sanding boat surface wear a mask or respirator . . . health."

3. The enclosed accelerated storage and stability data for 30 days at 50°C is acceptable on an interim basis. The results of a 12-month storage stability test must be received by the Agency within 15 months after the date of this Registration Notice.

BEST AVAILABLE COPY




ATTACHMENT A PLS. RETURN

SIGNATURE

4. Submit five (5) copies of your final printed labeling before you release the product for shipment. Refer to the A-79 Enclosure for a further description of final printed labeling.

If these conditions are not complied with, the registration will be subject to cancellation in accordance with FIFRA section 6(e). Your release for shipment of the product constitutes acceptance of these conditions.

A stamped copy of the label is enclosed for your records.

John H. Lee 
Product Manager (B1)
Antimicrobial Program Branch
Registration Division (H7504C)

Enclosures

BEST AVAILABLE COPY



10700

U.S. YACHT
a fine paint PAINT

Keep Out of Reach of Children
WARNING

SEE SIDE PANELS FOR
ADDITIONAL PRECAUTIONARY STATEMENTS

DIRECTIONS: FOR USE
IT IS A VIOLATION OF FEDERAL LAW TO
USE THIS PRODUCT IN A MANNER INCON-
SISTANT WITH ITS LABELING.

STORAGE AND DISPOSAL
STORE IN A DRY AREA AWAY FROM HEAT
AND SEVERE COLD. KEEP PARTIALLY
USED CONTAINER TIGHTLY SEALED. DO
NOT CONTAMINATE WATER, FOOD OR
FEED BY STORAGE OR DISPOSAL.

PESTICIDE DISPOSAL
PESTICIDE WASTES ARE TOXIC. IMPROPER
DISPOSAL OF EXCESS PESTICIDES OR RIN-
SATE IS A VIOLATION OF FEDERAL LAW.
IF THESE WASTES CANNOT BE DISPOSED
OF BY USE ACCORDING TO LABEL IN-
STRUCTIONS, CONTACT YOUR STATE
PESTICIDE OR ENVIRONMENTAL CONTROL
AGENCY, OR HAZARDOUS WASTE REP-
RESENTATIVE AT THE NEAREST EPA REG-
IONAL OFFICE FOR GUIDANCE.

CONTAINER DISPOSAL
TRIPLE RINSE CONTAINER, THEN OFFER
IT FOR RECYCLING OR RECONDITIONING,
OR PUNCTURE AND DISPOSE OF IN A
SANITARY LANDFILL, OR BY OTHER PRO-
CEEDURES APPROVED BY STATE AND
LOCAL AUTHORITIES.

U S YACHT PAINT COMPANY, INC
ROSELAND, NJ 07068 USA
EPA EST. NO. 23566-1


NET CONTENTS 1 GALLON

ACCEPTED
with COMMENTS
in EPA Letter Dated:

MAR 23 1989

Under the Federal Insecticide,
Fungicide, and Rodenticide Act as
amended, for the pesticide
registered under EPA Reg. No.

23566-13

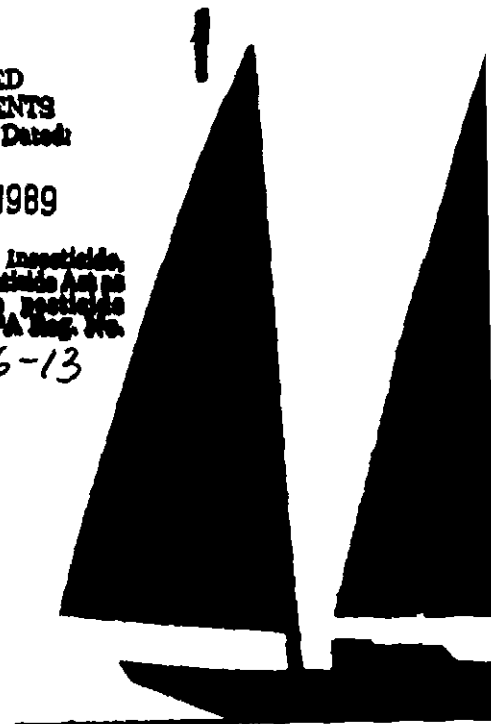

650
COPPER

T
e boats



55.00
45.00
100.00

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS
AND DOMESTIC ANIMALS**

WARNING. CAUSES EYE IRRITATION. HARMFUL IF ABSORBED THRU SKIN. AVOID CONTACT WITH SKIN, EYES OR CLOTHING. WEAR PROTECTIVE CLOTHING SUCH AS GLOVES, LONG-SLEEVED COTTON SHIRT, LONG PANTS AND HAT. MAY BE FATAL IF SWALLOWED OR INHALED. DO NOT BREATHE DUST OR VAPOR. WEAR A MASK OR RESPIRATOR JOINTLY APPROVED BY THE MINING ENFORCEMENT AND SAFETY ADMINISTRATION AND THE NATIONAL INSTITUTE FOR OCCUPATIONAL SAFETY AND HEALTH. REMOVE CONTAMINATED CLOTHING AND WASH BEFORE REUSE. WASH THOROUGHLY WITH SOAP AND WATER AFTER HANDLING.

STATEMENT OF PRACTICAL TREATMENT
IF SWALLOWED: DRINK PROMPTLY A LARGE QUANTITY OF MILK, EGG WHITES, GELATIN SOLUTION, OR IF THESE ARE NOT AVAILABLE, DRINK LARGE QUANTITIES OF WATER. AVOID ALCOHOL. GET MEDICAL ATTENTION IF IN EYES. FLUSH WITH PLENTY OF WATER. GET MEDICAL ATTENTION.

IF ON SKIN: WASH WITH PLENTY OF SOAP AND WATER. GET MEDICAL ATTENTION.

IF INHALED: REMOVE VICTIM TO FRESH AIR. IF NOT BREATHING, GIVE ARTIFICIAL RESPIRATION, PREFERABLY MOUTH-TO-MOUTH. GET MEDICAL ATTENTION.

ENVIRONMENTAL HAZARDS

THIS PAINT IS TOXIC TO FISH. DO NOT APPLY DIRECTLY TO WATER BY CLEANING OF EQUIPMENT OR DISPOSAL OF WASTES. DO NOT ALLOW CHIPS AND DUST FROM PAINT REMOVAL TO ENTER WATER. DISPOSE OF PAINT IN AN APPROVED LANDFILL.

PHYSICAL AND CHEMICAL HAZARDS

FLAMMABLE. KEEP AWAY FROM HEAT AND OPEN FLAME.

DIRECTIONS

U S YACHT ANTIFOULANTS ARE FOR USE ON FIBERGLASS AND WOOD BOAT BOTTOMS. THEY CONTROL THE FOULING OF ALGAE, BARNACLES, HYDROIDS, ETC. IN SALT WATER; AND OF ALGAE IN FRESH WATER. THEY CAN BE APPLIED OVER MOST OTHER PAINTS; TO BE SURE, APPLY A SMALL TEST PATCH NEAR THE KEEL, AND OBSERVE FOR 15 MINUTES TO SEE IF LIFTING OCCURS. USE RACING VINYL COPPER ONLY OVER ANOTHER VINYL, AS ITS STRONG SOLVENT MAY LIFT OTHER PAINTS. COVERAGE IS ABOUT 400 SQUARE FEET PER GALLON. USE 950 BRUSHING THINNER FOR THINNING IF NEEDED FOR GOOD BRUSHING, AND FOR CLEANUP. APPLY WITH BRUSH OR ROLLER. USE A RESPIRATOR WHEN SANDING OR DUSTING. SANDING BETWEEN COATS IS NOT NECESSARY FOR GOOD ADHESION; HOWEVER, HARD AND SEMI-HARD, FAST-DRYING ANTIFOULANTS CAN BE SANDED FOR SMOOTHNESS WITH 100-150 GRIT SANDPAPER. DRY AT LEAST 1 DAY BETWEEN COATS, AND BEFORE LAUNCHING. AFTER LAST COAT LAUNCH SOFT, SLOW-DRYING ANTIFOULANTS WITHIN A FEW DAYS; HARDER, FAST-DRYING ANTIFOULANTS WITHIN A FEW WEEKS. SEND FOR "U S Y PAINTING SYSTEMS" FOR MORE INFORMATION.

YEARLY REPAINTING

SCRUB BOTTOM CLEAN AT HAUL-OUT. REPAINT ONLY IF OLD PAINT IS SOUND AND TIGHT; IF NOT, REMOVE IT BY SANDING OR WITH PAINT REMOVER. IF OLD PAINT IS ROUGH, SAND IT WITH 100-150 GRIT SANDPAPER. PREPARE SEAMS, NICKS AND CHIPS AS BELOW. SPOT-COAT ANY SCUFFS WITH ANTIFOULANT. APPLY 1-2 COATS OF ANTIFOULANT.

ON BARE WOOD

IF SEAMS ARE NOT FLUSH, FILL THEM WITH SEAM COMPOUND, DRY SEVERAL DAYS UNTIL SKIN FORMS, DO NOT SAND. FILL NICKS WITH TROWEL CEMENT, DRY HARD, SAND. APPLY 3 COATS OF ANTIFOULANT.

ON BARE FIBERGLASS

DEWAX BY WASHING WITH 955 FIBERGLASS WAX REMOVER OR 950 BRUSHING THINNER, REMOVE DISSOLVED WAX AT ONCE WITH CLEAN PAPER TOWELS OR RAGS; REPEAT; REPEAT! SAND HARD TO A DULL FINISH WITH 80-100 GRIT SANDPAPER. FILL ANY CHIPS WITH TROWEL CEMENT, DRY HARD, SAND. APPLY 2 COATS OF ANTIFOULANT.

BEST AVAILABLE COPY

W