

PM 3: 22 40-3

1073



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
WASHINGTON, D.C. 20460

COPY

OFFICE OF
PESTICIDES AND TOXIC SUBSTANCES

U.S. Yacht Paint Company
P.O. Box 96
Roseland, NJ 07068

JUL 28 1989

Attention: John A. Pettit

Gentlemen:

Subject: 650 Red Copperpoxy
EPA Registration No. 23566-13
660 Red Great Lakes Copper
EPA Registration No. 23566-14
Your Submission Dated April 4, 1989
EPA Received Date April 10, 1989

This is in response to the above subject matter. The labeling referred to above, submitted in connection with registration under the Federal Insecticide, Fungicide, and Rodenticide Act (FIFRA), is acceptable provided that you make the labeling changes listed below before you release the product for shipment bearing the amend labeling.

1. Under the Statement of Practical Treatment, If Swallowed, delete the phrase "Drink promptly a large quantity of milk, egg whites, gelatin solution, or if these or not available" and insert instead "If swallowed, drink promptly a large quantity of water."
2. Submit five (5) copies of your final printed labeling before you release the product for shipment.

If these conditions are not complied with, the registration will be subject to cancellation in accordance with FIFRA section 6(e). Your release for shipment of the product constitutes acceptance of these conditions.


BEST AVAILABLE COPY

20+3

A stamped copy of the labeling is enclosed for your records.

Should you have any further questions, please contact Veronica Dutch at (703) 557-6938.

Sincerely yours,

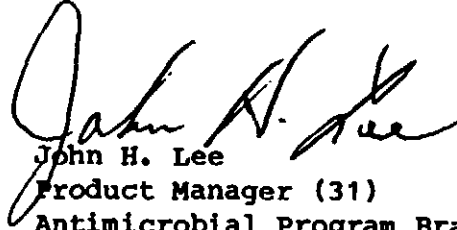

John H. Lee
Product Manager (31)
Antimicrobial Program Branch
Registration Division (H7505C)

Enclosure

557-6938

PM-31 2



U.S. YACHT PAINT

a fine paint for

Keep Out of Reach of Children

WARNING

SEE SIDE PANELS FOR
ADDITIONAL PRECAUTIONARY STATEMENTS

ACTIVE INGREDIENTS
CUPROUS
INERT INGREDIENTS
TOTAL:
EPA REG. NO. 23566-13
CONTAINS
PETROLEUM
DISTILLATES

DIRECTIONS FOR USE
IT IS A VIOLATION OF FEDERAL LAW TO USE THIS PRODUCT IN A MANNER INCONSISTANT WITH ITS LABELING.


STORAGE AND DISPOSAL
STORE IN A DRY AREA AWAY FROM HEAT AND SEVERE COLD. KEEP PARTIALLY USED CONTAINER TIGHTLY SEALED. DO NOT CONTAMINATE WATER, FOOD OR FEED BY STORAGE OR DISPOSAL.

PESTICIDE DISPOSAL
PESTICIDE WASTES ARE TOXIC. IMPROPER DISPOSAL OF EXCESS PESTICIDES OR RINSE IS A VIOLATION OF FEDERAL LAW. IF THESE WASTES CANNOT BE DISPOSED OF BY USE ACCORDING TO LABEL INSTRUCTIONS, CONTACT YOUR STATE PESTICIDE OR ENVIRONMENTAL CONTROL AGENCY, OR HAZARDOUS WASTE REPRESENTATIVE AT THE NEAREST EPA REGIONAL OFFICE FOR GUIDANCE.

CONTAINER DISPOSAL
TRIPLE RINSE CONTAINER, THEN OFFER IT FOR RECYCLING OR RECONDITIONING, OR PUNCTURE AND DISPOSE OF IN A SANITARY LANDFILL, OR BY OTHER PROCEDURES APPROVED BY STATE AND LOCAL AUTHORITIES.

JUL 28 1989

Under the Federal Insecticide, Fungicide, and Rodenticide Act, as amended, for the purpose of registration under EPA 23566-13

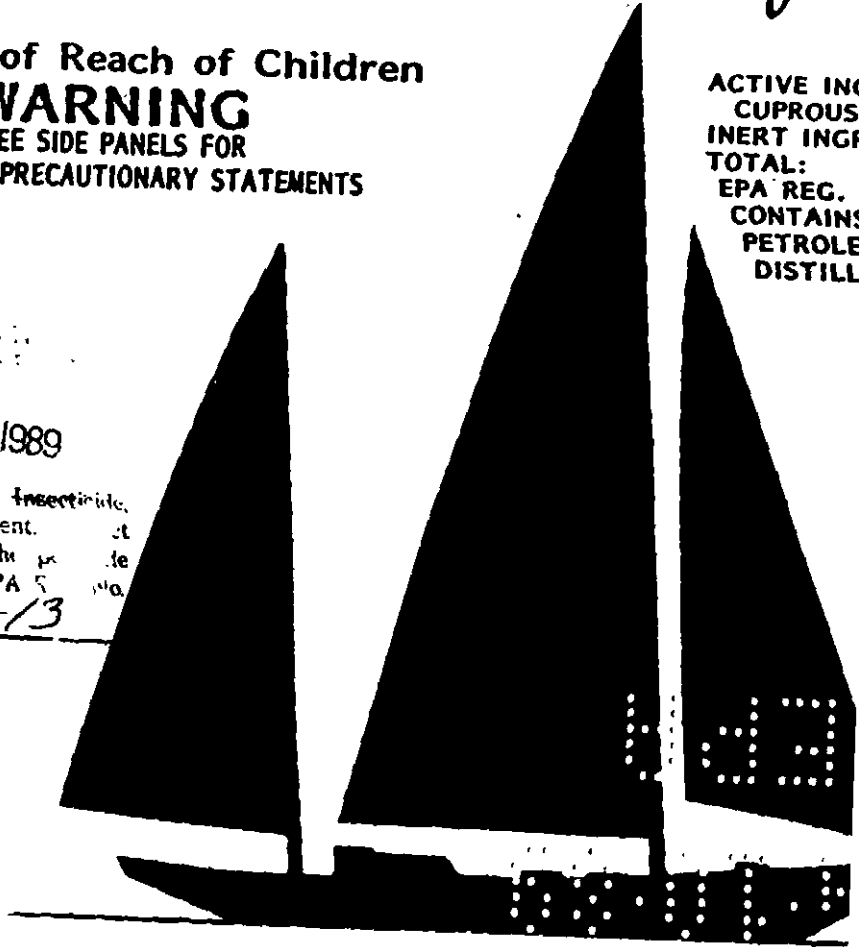

U S YACHT PAINT COMPANY, INC
ROSELAND, NJ 07068 USA
EPA EST. NO. 23566-NJ-1
NET CONTENTS 1 GALLON

650 RED COPPERPOXY

4

DIRECTIONS

U S YACHT ANTIFOULANTS ARE FOR USE ON FIBERGLASS AND WOOD BOAT BOTTOMS. THEY CONTROL THE FOULING OF ALGAE, BARNACLES, HYDROIDS, ETC. IN SALT WATER; AND OF ALGAE IN FRESH WATER. THEY CAN BE APPLIED OVER MOST OTHER PAINTS; TO BE SURE, APPLY A SMALL TEST PATCH NEAR THE KEEL, AND OBSERVE FOR 15 MINUTES TO SEE IF LIFTING OCCURS. USE RACING VINYL COPPER ONLY OVER ANOTHER VINYL, AS ITS STRONG SOLVENT MAY LIFT OTHER PAINTS. COVERAGE IS ABOUT 400 SQUARE FEET PER GALLON. USE 950 BRUSHING THINNER FOR THINNING IF NEEDED FOR GOOD BRUSHING, AND FOR CLEANUP. APPLY WITH BRUSH OR ROLLER. USE A RESPIRATOR WHEN SANDING OR DUSTING. SANDING BETWEEN COATS IS NOT NECESSARY FOR GOOD ADHESION; HOWEVER, HARD AND SEMI-HARD, FAST-DRYING ANTIFOULANTS CAN BE SANDED FOR SMOOTHNESS WITH 100-150 GRIT SANDPAPER. DRY AT LEAST 1 DAY BETWEEN COATS, AND BEFORE LAUNCHING. AFTER LAST COAT LAUNCH SOFT, SLOW-DRYING ANTIFOULANTS WITHIN A FEW DAYS; HARDER, FAST-DRYING ANTIFOULANTS WITHIN A FEW WEEKS. SEND FOR "U S Y PAINTING SYSTEMS" FOR MORE INFORMATION.

YEARLY REPAINTING

SCRUB BOTTOM CLEAN AT HAUL-OUT. REPAIR ONLY IF OLD PAINT IS SOUND AND TIGHT; IF NOT, REMOVE IT BY SANDING OR WITH PAINT REMOVER. IF OLD PAINT IS ROUGH, SAND IT WITH 100-150 GRIT SANDPAPER. PREPARE SEAMS, NICKS AND CHIPS AS BELOW. SPOT-COAT ANY SCUFFS WITH ANTIFOULANT. APPLY 1-2 COATS OF ANTIFOULANT.

ON BARE WOOD

IF SEAMS ARE NOT FLUSH, FILL THEM WITH SEAM COMPOUND, DRY SEVERAL DAYS UNTIL SKIN FORMS, DO NOT SAND. FILL NICKS WITH TROWEL CEMENT, DRY HARD, SAND. APPLY 3 COATS OF ANTIFOULANT.

ON BARE FIBERGLASS

DEWAX BY WASHING WITH 955 FIBERGLASS WAX REMOVER OR 950 BRUSHING THINNER, REMOVE DISSOLVED WAX AT ONCE WITH CLEAN PAPER TOWELS OR RAGS; REPEAT; REPEAT! SAND HARD TO A DULL FINISH WITH 80-100 GRIT SANDPAPER. FILL ANY CHIPS WITH TROWEL CEMENT, DRY HARD, SAND. APPLY 2 COATS OF ANTIFOULANT.