

<p style="text-align: center;">US ENVIRONMENTAL PROTECTION AGENCY OFFICE OF PESTICIDES PROGRAMS REGISTRATION DIVISION (75-767) WASHINGTON, DC 20460</p> <p>NOTICE OF PESTICIDE: <input type="checkbox"/> REGISTRATION <input type="checkbox"/> REREGISTRATION</p> <p style="text-align: center;"><i>(Under the Federal Insecticide, Fungicide, and Rodenticide Act, as amended)</i></p>	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%; padding: 2px;">EPA REGISTRATION NO. 23566-18</td> <td style="width: 50%; padding: 2px;">DATE OF ISSUANCE</td> </tr> <tr> <td colspan="2" style="padding: 2px;">TERM OF ISSUANCE APR 13 1994</td> </tr> <tr> <td colspan="2" style="padding: 2px;">NAME OF PESTICIDE PRODUCT Americas Cup 681 Blue</td> </tr> </table>	EPA REGISTRATION NO. 23566-18	DATE OF ISSUANCE	TERM OF ISSUANCE APR 13 1994		NAME OF PESTICIDE PRODUCT Americas Cup 681 Blue	
EPA REGISTRATION NO. 23566-18	DATE OF ISSUANCE						
TERM OF ISSUANCE APR 13 1994							
NAME OF PESTICIDE PRODUCT Americas Cup 681 Blue							
<p>NAME AND ADDRESS OF REGISTRANT (Include ZIP code)</p> <div style="border: 1px solid black; padding: 10px; margin: 10px 0;"> <p style="text-align: center;">U.S. Yacht Paint Company 1525 Route 1 South North Brunswick, NJ 08902</p> </div>							
<p>NOTE: Changes in labeling formula differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Registration Division prior to use of the label in commerce. In any correspondence on this product always refer to the above U.S. EPA registration number.</p>							
<p>On the basis of information furnished by the registrant, the above named pesticide is hereby Registered/Reregistered under the Federal Insecticide, Fungicide, and Rodenticide Act.</p> <p>A copy of the labeling accepted in connection with this Registration/Reregistration is returned herewith.</p> <p>Registration is in no way to be construed as an indorsement or approval of this product by this Agency. In order to protect health and the environment, the Administrator, on his motion, may at any time suspend or cancel the registration of a pesticide in accordance with the Act. The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others.</p> <p style="text-align: center;">This product is conditionally registered in accordance with FIFRA sec. 3(c)(7)(A) provided that you:</p> <ol style="list-style-type: none"> 1. Submit/cite all data required for registration/reregistration of your product under FIFRA section 3(c)(5) when the Agency requires all registrants of similar products to submit such data; and submit acceptable responses required for reregistration of your product under FIFRA section 4. 2. Make the labeling changes listed below before you release the product for shipment: <ol style="list-style-type: none"> a. Add the phrase "EPA Registration No. 23566-18". b. Correct the spelling of the word: inconsistent. (upper left panel) c. It is preferred that the product name appear at the top of the panel, not at the bottom. d. Based upon the data submitted, revise the statement: "Flammable. Keep away from heat and open flame" to read: Do not use or store near heat or open flame. 							
<p><input type="checkbox"/> ATTACHMENT IS APPLICABLE</p> <div style="text-align: center; border: 2px solid black; padding: 5px; width: fit-content; margin: 0 auto;"> <p>BEST AVAILABLE COPY</p> </div>							
SIGNATURE OF APPROVING OFFICIAL	DATE						

20/14

UNITED STATES ENVIRONMENTAL PROTECTION AGENCY

If these conditions are not complied with, the registration will be subject to cancellation in accordance with FIFRA sec. 6(e). Your release for shipment of the product constitutes acceptance of these conditions.

A stamped copy of the label is enclosed for your records.

Sincerely,



Marshall Swindell
Acting Product Manager (31)
Antimicrobial Program Branch
Registration Division (H7505C)

Enclosures

CONCURRENCES

SYMBOL								
SURNAME								
DATE								



U. S. YACHT

a fine paint PAINT *for*

Keep Out of Reach of Children

WARNING

SEE SIDE PANELS FOR
ADDITIONAL PRECAUTIONARY STATEMENTS

DIRECTIONS FOR USE
IT IS A VIOLATION OF FEDERAL LAW TO USE THIS PRODUCT IN A MANNER INCONSISTANT WITH ITS LABELING.


STORAGE AND DISPOSAL
STORE IN A DRY AREA AWAY FROM HEAT AND SEVERE COLD. KEEP PARTIALLY USED CONTAINER TIGHTLY SEALED. DO NOT CONTAMINATE WATER, FOOD OR FEED BY STORAGE OR DISPOSAL.

PESTICIDE DISPOSAL
PESTICIDE WASTES ARE TOXIC. IMPROPER DISPOSAL OF EXCESS PESTICIDES OR RINSE IS A VIOLATION OF FEDERAL LAW. IF THESE WASTES CANNOT BE DISPOSED OF BY USE ACCORDING TO LABEL INSTRUCTIONS, CONTACT YOUR STATE PESTICIDE OR ENVIRONMENTAL CONTROL AGENCY, OR HAZARDOUS WASTE REPRESENTATIVE AT THE NEAREST EPA REGIONAL OFFICE FOR GUIDANCE.

CONTAINER DISPOSAL
TRIPLE RINSE CONTAINER, THEN OFFER IT FOR RECYCLING OR RECONDITIONING, OR PUNCTURE AND DISPOSE OF IN A SANITARY LANDFILL, OR BY OTHER PROCEDURES APPROVED BY STATE AND LOCAL AUTHORITIES.

U S YACHT PAINT CO. INC.
NORTH BRUNSWICK N J 08902
EPA EST. No 23566-NJ-1

NET CONTENTS 1 GALLON

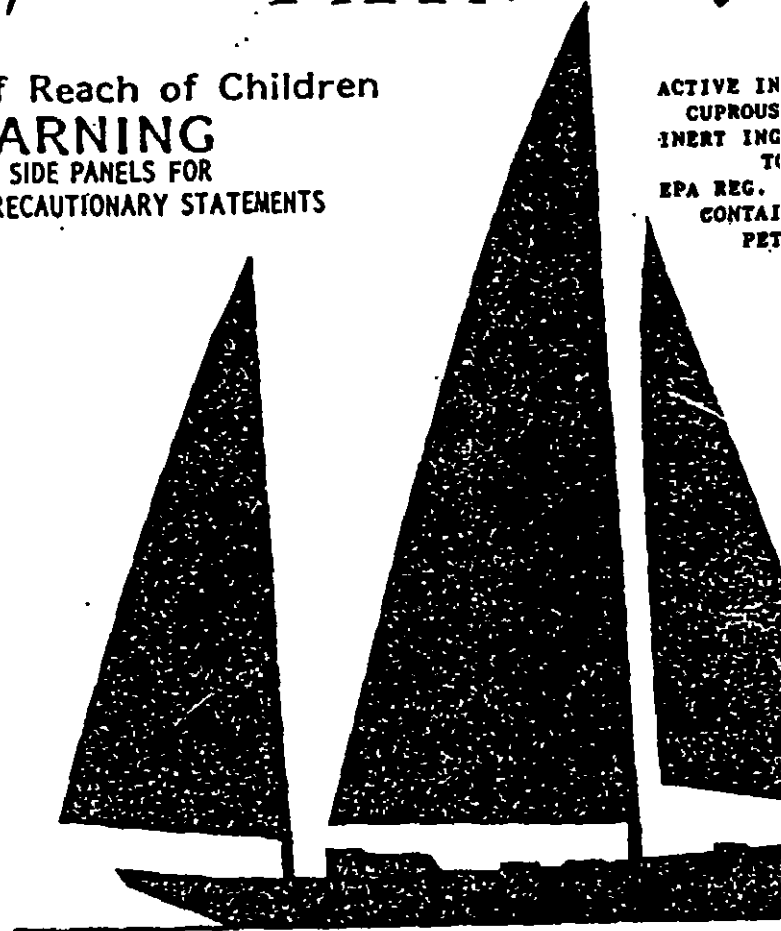

ACTIVE IN
CUPROUS
INERT ING
TO
EPA REG.
CONTAI
PET

AMERICAS CUP
681 BLUE

BEST A



BEST AVAILABLE COPY

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS
AND DOMESTIC ANIMALS**

WARNING. CAUSES EYE IRRITATION. HARMFUL IF ABSORBED THRU SKIN. AVOID CONTACT WITH SKIN, EYES OR CLOTHING. WEAR PROTECTIVE CLOTHING SUCH AS GLOVES, LONG-SLEEVED COTTON SHIRT, LONG PANTS AND HAT. MAY BE FATAL IF SWALLOWED OR INHALED. DO NOT BREATHE DUST OR VAPOR. WHILE SANDING BOAT SURFACES WEAR A MASK OR RESPIRATOR JOINTLY APPROVED BY THE MINING ENFORCEMENT AND SAFETY ADMINISTRATION AND THE NATIONAL INSTITUTE FOR OCCUPATIONAL SAFETY AND HEALTH. REMOVE CONTAMINATED CLOTHING AND WASH BEFORE REUSE. WASH THOROUGHLY WITH SOAP AND WATER AFTER HANDLING.

STATEMENT OF PRACTICAL TREATMENT
IF SWALLOWED: DRINK PROMPTLY A LARGE QUANTITY OF WATER. AVOID ALCOHOL. GET MEDICAL ATTENTION.
IF IN EYES: FLUSH WITH PLENTY OF WATER. GET MEDICAL ATTENTION.
IF ON SKIN: WASH WITH PLENTY OF SOAP AND WATER. GET MEDICAL ATTENTION.
IF INHALED: REMOVE VICTIM TO FRESH AIR. IF NOT BREATHING, GIVE ARTIFICIAL RESPIRATION, PREFERABLY MOUTH-TO-MOUTH. GET MEDICAL ATTENTION.

ENVIRONMENTAL HAZARDS

THIS PAINT IS TOXIC TO FISH. DO NOT APPLY DIRECTLY TO WATER BY CLEANING OF EQUIPMENT OR DISPOSAL OF WASTES. DO NOT ALLOW CHIPS AND DUST FROM PAINT REMOVAL TO ENTER WATER. DISPOSE OF PAINT IN AN APPROVED LANDFILL.

PHYSICAL AND CHEMICAL HAZARDS

FLAMMABLE. KEEP AWAY FROM HEAT AND OPEN FLAME.

DIRECTIONS

U S YACHT ANTIFOULANTS ARE FOR USE ON FIBERGLASS AND WOOD BOAT BOTTOMS. THEY CONTROL THE FOULING OF ALGAE, BARNACLES, HYDROIDS, ETC. IN SALT WATER; AND OF ALGAE IN FRESH WATER. THEY CAN BE APPLIED OVER MOST OTHER PAINTS; TO BE SURE, APPLY A SMALL TEST PATCH NEAR THE KEEL, AND OBSERVE FOR MINUTES TO SEE IF LIFTING OCCURS. USE RACING VINYL COPPER ONLY OVER ANOTHER VINYL, AS ITS STRONG SOLVENT MAY LIFT OTHER PAINTS. COVERAGE IS ABOUT 400 SQUARE FEET PER GALLON. USE 950 BRUSHING THINNER FOR THINNING IF NEEDED FOR GOOD BRUSHING, AND FOR CLEANUP. APPLY WITH BRUSH OR ROLLER. WEAR A RESPIRATOR WHEN SANDING OR DUSTING. SANDING BETWEEN COATS IS NOT NECESSARY FOR GOOD ADHESION; HOWEVER, HARD AND FAST-DRYING ANTIFOULANTS CAN BE SANDED FOR SMOOTHNESS WITH 100-150 GRIT SANDPAPER. DRY AT LEAST 1 DAY BETWEEN COATS, AND BEFORE LAUNCHING. AFTER LAST COAT LAUNCH SLOWLY. USE SLOW-DRYING ANTIFOULANTS WITHIN A FEW DAYS; HARDER, FAST-DRYING ANTIFOULANTS WITHIN A FEW WEEKS. SEND FOR "U S YACHT PAINTING SYSTEMS" FOR MORE INFORMATION.

YEARLY REPAINTING

SCRUB BOTTOM CLEAN AT HAUL-OUT. REPAINT ONLY IF OLD PAINT IS SOUND AND TIGHT; IF NOT, REMOVE IT BY SANDING OR WITH PAINT REMOVER. IF OLD PAINT IS ROUGH, SAND IT WITH 100-150 GRIT SANDPAPER. PREPARE SEAMS, NICKS AND CHIPS AS BELOW. SPOT PAINT ANY SCUFFS WITH ANTIFOULANT. APPLY 1-2 COATS OF ANTIFOULANT.

ON BARE WOOD

IF SEAMS ARE NOT FLUSH, FILL THEM WITH SEAM COMPOUND, DRY SEVERAL DAYS UNTIL SKIN FORMS, DO NOT SAND. FILL NICKS WITH TROWEL CEMENT, DRY HARD, SAND. APPLY 3 COATS OF ANTIFOULANT.

ON BARE FIBERGLASS

DEWAX BY WASHING WITH 955 FIBERGLASS WAX REMOVER OR 950 BRUSHING THINNER, REMOVE DISSOLVED WAX AT ONCE WITH CLEAN PAINT TOWELS OR RAGS; REPEAT; REPEAT! SAND HARD TO A DULL FINISH WITH 80-100 GRIT SANDPAPER. FILL ANY CHIPS WITH TROWEL CEMENT, DRY HARD, SAND. APPLY 2 COATS OF ANTIFOULANT.