

PI 31 23566-18

10/25

301 ✓

JAN 03 1995

U.S. Yacht Paint Company
1525 Route 1 South
North Brunswick, NJ 08902

Attention: Donald Schnurr

Subject: America's Cup 681 Blue
EPA Registration No. 23566-18
Your Letter Dated November 15, 1994.

The amendment (label update) referred to above, submitted in connection with registration under the Federal Insecticide, Fungicide, and Rodenticide Act, as amended, is acceptable provided that you:

1. Make the following labeling changes below before you release the product for shipment bearing the amended labeling.

a. The following must be retained from the last stamped label of April 13, 1994

- the heading: Net Contents
- kinds of marine growth: barnacles, algae, hydroids
- type of water: salt and fresh water
- where the product can be used only: boat bottoms only
- when to wear mask/respirator: while sanding boat surfaces

b. The ingredient statement section must be on the front panel.

c. The signal word: "Warning" must be placed directly below the statement; "Keep out of reach of children" on the front panel.

d. Delete the following claims:

- excellent
- long term
- outstanding
- ideal

Note: Superlatives are not permitted on pesticide labels.

e. Revise the statement "...prepared bottom paints and surfaces..." to read: "~~...prepared bottom paints~~..."

CONCURRENCES

SYMBOL							
SURNAME							
DATE							

2045

- 2 -

2. A release for shipment of the product bearing the amended labeling constitutes acceptance of these conditions.

3. Our records have been adjusted to reflect your product name change:

OLD PRODUCT NAME: Americas Cup 681 Blue

NEW PRODUCT NAME: America's Cup 681 Blue

4. A stamped copy of the labeling is enclosed for your records.

If you have any questions concerning this letter, contact V. Goncarovs at 703-305-6663.

Sincerely,

Walter C. Francis
Acting Product Manager (31)
Antimicrobial Program Branch
Registration Division (H7505C)

Enclosures

CONCURRENCES							
SYMBOL	Gmar?						
SJRNAME							
DATE	1/4/95						

SECRET



U.S. YACHT PAINT

a fine paint for fine boats


ACCEPTED
with COMMENTS
In EPA Letter Date:

JAN 03 1995

Under the Federal Insecticide, Fungicide, and Herbicide Act (FIFRA) it is amended for the registration under FIFRA Reg. No.

23566-18

Keep Out of Reach
of Children

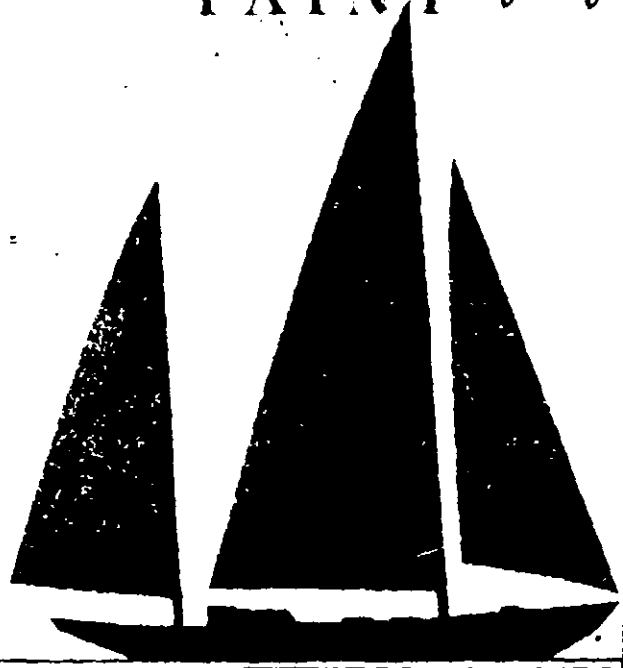

WARN

FIBERGLASS ANTI-FOULING BOTTOM PAINT

AMERICA'S CU

681 BLUE

ONE U.S. GALLON (3.785 LITERS)

4045

PA

1 2 3 4

MF 225-030

THIS PRODUCT IS A PESTICIDE.
 READ THE LABEL CAREFULLY.
 STORE IN A DRY PLACE. DO NOT SEW.
 COLD. KEEP PARTIALY OPENED CONTAINERS TIGHTLY
 SEALED. DO NOT CONTAIN OR FEED BY STORAGE.
 PESTICIDE DISPOSAL
 OF EXCESS PESTICIDE
 OF FEDERAL LAW
 POSSED BY THE
 TIONS. CONTACT
 RONMENTAL CONTROL
 WASTE HERE
 REGIONAL

ACTIVE INGREDIENT:	
CUPROUS OXIDE	67.0%
INERT INGREDIENTS	33.0%
TOTAL	100.0%
EPA REG. 23566-18	
EPA ESTABLISHMENT 23566-NJ-1	
CONTAINS PETROLEUM DISTILLATES	

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS
AND DOMESTIC ANIMALS**

CAUSES EYE IRRITATION. HARMFUL IF ABSORBED THROUGH SKIN. AVOID CONTACT WITH SKIN, EYES, OR CLOTHING. WEAR PROTECTIVE CLOTHING SUCH AS GLOVES, LONG SLEEVED COTTON SHIRT, LONG PANTS AND HAT. MAY BE IRRITANT IF SWALLOWED OR INHALED. DO NOT BREATHE DUST, VAPOR, OR SPRAY MIST. WEAR A MASK OR RESPIRATOR JOINTLY APPROVED BY THE MINING ENFORCEMENT AND SAFETY ADMINISTRATION AND BY THE NATIONAL INSTITUTE FOR OCCUPATIONAL SAFETY AND HEALTH. REMOVE CONTAMINATED CLOTHING AND WASH BEFORE REUSE. WASH THOROUGHLY WITH SOAP AND WATER AFTER HANDLING.

STATEMENT OF PRACTICAL TREATMENT

IF SWALLOWED: DRINK OR SUCKLE A LARGE QUANTITY OF WATER. AVOID ALCOHOL. GET MEDICAL ATTENTION.
IF IN EYES: FLUSH WITH PLentiful WATER. GET MEDICAL ATTENTION.
IF ON SKIN: WASH WITH SOAP AND WATER. GET MEDICAL ATTENTION.
IF INHALED: REMOVE TO FRESH AIR. IF NOT BREATHING, GIVE ARTIFICIAL RESPIRATION. BREATHE INTO MOUTH TO MOUTH. GET MEDICAL ATTENTION.

ENVIRONMENTAL HAZARDS

THIS PAINT IS TOXIC TO FISH. DO NOT APPLY DIRECTLY TO WATER BY CLEANING OF EQUIPMENT OR DISPOSAL OF WASTES. DO NOT ALLOW OILS AND OILS FROM PACKAGING TO ENTER WATER. DISPOSE OF PAINT IN AN APPROVED MANNER.

PHYSICAL AND CHEMICAL HAZARDS

DO NOT USE OR STORE NEAR OPEN FLAME.

U.S. YACHT PAINT COMPANY
1525 ROUTE 1 SOUTH
NORTH BRUNSWICK, NJ 08902
300-566-5668

PRODUCT DESCRIPTION: THIS PRODUCT PROVIDES EXCELLENT LONG TERM ANTI FOULING PROTECTION AGAINST MARINE GROWTH. THE MODIFIED EPOXY BASE RENDERS A HARD SMOOTH FINISH WITH OUTSTANDING DURABILITY AND ABRASION RESISTANCE. IT HAS UNIVERSAL APPLICATION OVER ALL TYPES OF PROPERLY PREPARED BOTTOM PAINTS AND SURFACES (EXCEPT ALUMINUM). IDEAL FOR USE ON FAST FIBERGLASS BOATS, AS WELL AS WOOD AND STEEL HULLS, WHERE A TOUGHER THAN NORMAL COATING IS DESIRED. MAY BE FINISHED EVEN SMOOTHER FOR RACING DIAL AND POWER BOATS.

SURFACE PREPARATION: SURFACE MUST ALWAYS BE CLEAN AND FREE OF ALL PREPARED PAINTS. IT IS ESSENTIAL TO DO SO. VENTILATION IS ESSENTIAL. TENTS AND OTHER ENCLOSURES MUST BE VENTILATED. USE 70021 REDUCER/THINNER TO REMOVE SANDING RESIDUE.

GENERAL APPLICATION: FOR USE ON BOATS BEYOND THE WATER LINE. CAN BE BRUSHED OR ROLLED ON. ON WOOD, STEEL, AND ALUMINUM SURFACES, PERFORM THE FOLLOWING: (1) COATS ARE APPLIED IN THE FOLLOWING MANNER:

MIXING AND THINNING: MIX THOROUGHLY. WHILE USING, WHEN USING BRUSH OR ROLLER, DO NOT THIN BOTTOM PAINTS.

THEORETICAL COVERAGE: DEPENDING ON SURFACE AND CONDITIONS, ONE GALLON OF BOTTOM PAINT WILL USUALLY COVER OVER 350 SQUARE FEET OF SURFACE WHEN BRUSHED OR ROLLED.

CLEAN UP: USE 70021 REDUCER/THINNER FOR CLEANING EQUIPMENT AND PAINT BRUSHES.

ESTIMATED DRY TIMES: BOTTOM PAINTS ARE DESIGNED FOR OVERCOATING AFTER AIR DRYING. PRIOR TO LAUNCHING, ALL SURFACES MUST BE OVERNIGHT AND DRY FOR 24 HOURS. DRYING CONDITIONS AND THICKNESS OF IF PAINT WAS APPLIED TOO THICKLY, LONGER PERIODS OR DRYING WILL BE REQUIRED. FRESH COATS OF PAINT MUST BE THOROUGHLY DRY BEFORE OVERCOATING.

YEARLY REPAINTING: SCRUB BOTTOM CLEANLY. HULLS: REPAINT ONLY IF OLD PAINTS SOUND AND TIGHT. IF NOT, REMOVE ALL PAINTS WITH PAINT REMOVER. REMOVE ALL PAINTS WITH PAINT REMOVER. PREPARE SURFACES AS ABOVE. APPLY COATS OF 3037.

REPAIRS: REMOVE ALL PAINTS WITH PAINT REMOVER. PREPARE SURFACES AS ABOVE. APPLY COATS OF 3037.

REPAIRS: REMOVE ALL PAINTS WITH PAINT REMOVER. PREPARE SURFACES AS ABOVE. APPLY COATS OF 3037.

REPAIRS: REMOVE ALL PAINTS WITH PAINT REMOVER. PREPARE SURFACES AS ABOVE. APPLY COATS OF 3037.