

ACCEPTED

AUG 04 2003

Under the Federal Insecticide, Fungicide, and
Rodenticide Act as amended, for the
pesticide, registered under
EPA Reg. No. 23566-20

★ U.S. YACHT ★ PAINT

Keep Out of Reach
of Children

WARNING

SEE SIDE PANELS FOR
ADDITIONAL PRECAUTIONARY
STATEMENTS

ACTIVE INGREDIENT:
CUPROUS OXIDE 55.0%
INERT INGREDIENTS 45.0%
TOTAL: 100.0%
EPA REG. 23566-20
EPA ESTABLISHMENT 2693-NJ-1

MULTI-SEASON ANTI-FOULING BOTTOM PAINT

STORAGE AND DISPOSAL

STORE IN A DRY AREA AWAY FROM HEAT AND SEVERE COLD. KEEP PARTIALLY USED CONTAINER TIGHTLY SEALED. DO NOT CONTAMINATE WATER, FOOD OR FEED BY STORAGE OR DISPOSAL.

PESTICIDE DISPOSAL

PESTICIDE WASTES ARE TOXIC. IMPROPER DISPOSAL OF EXCESS PESTICIDES OR RINSEATE IS A VIOLATION OF FEDERAL LAW. IF THESE WASTES CANNOT BE DISPOSED OF BY USE ACCORDING TO LABEL INSTRUCTIONS, CONTACT YOUR STATE PESTICIDE OR ENVIRONMENTAL CONTROL AGENCY FOR HAZARDOUS WASTE REPRESENTATIVE AT THE NEAREST EPA REGIONAL OFFICE FOR GUIDANCE.

CONTAINER DISPOSAL

TRIPLE RINSE CONTAINER, THEN OFFER IT FOR RECYCLING OR RECONDITIONING, OR PUNCTURE AND DISPOSE OF IN A SANITARY LANDFILL, OR BY OTHER PROCEDURES APPROVED BY STATE AND LOCAL AUTHORITIES.

BIOC³ CONTINUOUS COPPER COPOLYMER

3901 BLUE

Exceptional Multi-Season Ablative Antifoulant
Controlled Polishing for Power or Sail

Manufactured by Interlux, A Division of International Paint Inc.
Multi-Season Copolymer Antifouling Bottom Paint

NET CONTENTS ONE U.S. GALLON (3.785 LITERS)

23566-20

8-4-2003

1/3

PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS
 CAUSES EYE IRRITATION. HARMFUL IF ABSORBED THROUGH SKIN.
 AVOID CONTACT WITH SKIN, EYES, OR CLOTHING. WEAR PROTECTIVE
 CLOTHING SUCH AS GLOVES, LONG SLEEVED COTTON SHIRT, LONG
 PANTS AND HAT. MAY BE FATAL IF SWALLOWED OR INHALED. DO NOT
 BREATHE DUST, VAPOR, OR SPRAY MIST. WEAR A MASK OR RESPIRA-
 TOR JOINTLY APPROVED BY THE MINING ENFORCEMENT AND SAFETY
 ADMINISTRATION AND BY THE NATIONAL INSTITUTE FOR OCCUPATION-
 AL SAFETY AND HEALTH WHILE SANDING BOAT SURFACES. REMOVE
 CONTAMINATED CLOTHING AND WASH BEFORE REUSE. WASH THOR-
 OUGHLY WITH SOAP AND WATER AFTER HANDLING.

FIRST AID

If Swallowed:

- Call a poison control center or doctor immediately for treatment advice.
- Have person sip a glass of water if able to swallow.
- Do not induce vomiting unless told to do so by a poison control center or doctor.
- Do not give anything by mouth to an unconscious person.

If on skin or clothing:

- Take off contaminated clothing.
- Rinse skin immediately with plenty of water for 15-20 minutes.
- Call a poison control center or doctor for treatment advice.

If inhaled:

- Move person to fresh air.
- If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth if possible.
- Call a poison control center or doctor for further treatment advice.


If in eyes:

- Hold eye open and rinse slowly and gently with water for 15-20 minutes.
- Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye.
- Call a poison control center or doctor for treatment advice.

Other: Have the product container or label with you when calling a poison control center or doctor or going for treatment.

ENVIRONMENTAL HAZARDS
 THIS PAINT IS TOXIC TO FISH. DO NOT APPLY DIRECTLY TO WATER BY
 CLEANING OF EQUIPMENT OR DISPOSAL OF WASTES. DO NOT ALLOW
 CHIPS AND DUST FROM PAINT REMOVAL TO ENTER WATER. DISPOSE
 OF PAINT IN AN APPROVED LANDFILL.

PHYSICAL AND CHEMICAL HAZARDS
 DO NOT USE OR STORE NEAR HEAT OR OPEN FLAME.

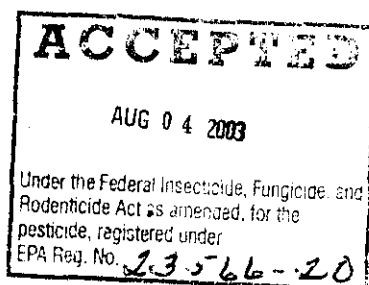

PRODUCT DESCRIPTION: BIO C PROVIDES MULTI-SEASON ANTI-FOULING PROTECTION AGAINST BARNACLES, ALGAE, AND HYDROIDS IN SALT AND FRESH WATER ON BOAT BOTTOMS ONLY. ITS ABLATIVE COPOLYMER BASE RENDERS A HARD, SMOOTH FINISH WITH DURABILITY AND ABRASION RESISTANCE. BIO C RELEASES BIOCIDES BY THE CONSTANT EXPOSURE OF NEW PAINT FILM TO THE WATER. IT HAS UNIVERSAL APPLICATION OVER ALL TYPES OF PROPERLY PREPARED BOTTOM PAINTS (EXCEPT ALUMINUM). FOR USE ON FAST FIBERGLASS BOATS, AS WELL AS WOOD AND STEEL HULLS. EXTENDED PROTECTION IS POSSIBLE, SINCE PERFORMANCE IS DIRECTLY PROPORTIONAL TO THE AMOUNT OF PAINT APPLIED.

DIRECTIONS FOR USE
IT IS A VIOLATION OF FEDERAL LAW TO USE THIS PRODUCT IN A MANNER INCONSISTENT WITH ITS LABELING.

SURFACE PREPARATION: SURFACE MUST ALWAYS BE CLEAN, DRY AND PROPERLY PREPARED, PRIOR TO PAINTING. FAILURE TO DO SO WILL LEAD TO EVENTUAL BLISTERING AND/OR PEELING. ALL SANDED SURFACES MUST BE WIPED CLEAN WITH (70021 REDUCER/THINNER, WEST MARINE MODEL 329591 REDUCER/THINNER, 551 DEWAXER, INTERLUX FIBERGLASS SOLVENT, WASH 202) TO REMOVE SANDING RESIDUE.

GENERAL APPLICATION: FOR USE ON BOATS BELOW THE TRUE WATERLINE. CAN BE BRUSHED OR ROLLED ON FIBERGLASS, WOOD, STEEL AND PREVIOUSLY PAINTED SURFACES PER APPLICATION SYSTEMS BELOW. DO NOT USE ON ALUMINUM. APPLY AT LEAST 3 COATS FOR BEST PERFORMANCE, AS THE LIFE OF THE PAINT IS PROPORTIONAL TO THE NUMBER OF COATS APPLIED.

MIXING AND THINNING: SHAKE OR MIX THOROUGHLY AND STIR CONTINUOUSLY WHILE USING. THIN WHEN NECESSARY WITH (70021 REDUCER/THINNER, WEST MARINE MODEL 329591 REDUCER/THINNER, 551 THINNER, INTERLUX SPECIAL THINNER 216, BRUSH-LEASE 433).

THEORETICAL COVERAGE: DEPENDING ON SURFACE AND CONDITIONS, ONE GALLON OF BOTTOM PAINT WILL USUALLY COVER OVER 350 SQUARE FEET OF SURFACE WHEN BRUSHED OR ROLLED.

CLEAN UP: USE (70021 REDUCER/THINNER, WEST MARINE MODEL 329591 REDUCER/THINNER, 551 REDUCER/THINNER, INTERLUX SPECIAL THINNER 216) FOR CLEANING EQUIPMENT AND PAINT BRUSHES.

ESTIMATED DRY TIMES: BOTTOM PAINTS ARE DESIGNED FOR OVERCOATING AFTER AN OVERNIGHT DRY. PRIOR TO LAUNCHING, ALLOW A MINIMUM DRY OF

OVERNIGHT AND MAXIMUM OF 30 DAYS IF DRYING CONDITIONS ARE POOR. IF PAINT WAS APPLIED TOO THICKLY, LONGER PERIODS OF DRYING WILL BE REQUIRED. FRESH COATS OF PAINT MUST BE THOROUGHLY DRY BEFORE OVERCOATING.

YEARLY REPAINTING: SCRUB BOTTOM CLEAN AT HAUL OUT. REPAINT ONLY IF OLD PAINT IS SOUND AND TIGHT. IF NOT, REMOVE BY SANDING OR WITH PAINT REMOVER. IF OLD PAINT IS THOUGH, SAND IT WITH 100-150 GRIT SAND PAPER. PREPARE SEAMS, NICKS AND CHIPS AS BELOW. SPOT COAT ANY SCUFFS WITH ANTI-FOULANT. APPLY 3 COATS OF ANTI-FOULANT.

ON BARE WOOD: IF SEAMS ARE NOT FLUSH, FILL THEM WITH SEAM COMPOUND. DRY SEVERAL DAYS UNTIL SKIN FORMS. DO NOT SAND. FILL NICKS WITH INTERLUX INTERPROTECT WATER TITE V135. TROWEL CEMENT. DRY HARD. SAND. APPLY (3035 UNDERCOAT PRIMER, A HIGH QUALITY MARINE UNDERCOAT PRIMER, 173 UNDERCOAT PRIMER, INTERLUX PRIMO CON 360) THEN APPLY 3 COATS OF ANTI-FOULANT.

ON BARE FIBERGLASS: DEWAX BY WASHING WITH (70021 REDUCER/THINNER, WEST MARINE MODEL 329591 REDUCER/THINNER, 551 DEWAXER, INTERLUX FIBERGLASS SOLVENT, WASH 202). REMOVE DISSOLVED WAX AT ONCE WITH CLEAN PAPER TOWELS OR RAGS. REPEAT. SAND HARD TO A DULL FINISH WITH 80-100 GRIT SAND PAPER. FILL ANY CHIPS WITH INTERLUX INTERPROTECT WATER TITE V135. TROWEL CEMENT. DRY HARD. SAND. APPLY (3035 SUPERCOAT WHITE PRIMER OR 3038 NON-SANDING GRAY PRIMER, A HIGH QUALITY MARINE PRIMER OR HIGH QUALITY MARINE NON-SANDING PRIMER, 179 NO-SAND PRIMER OR 173 WHITE UNDERCOAT PRIMER, INTERLUX INTERPROTECT 2000E). THEN APPLY 3 COATS OF ANTI-FOULANT.

ON BARE STEEL: SAND BLAST SURFACE TO A NEAR WHITE METAL. REMOVE BLAST RESIDUE WITH A BROOM AND AIR HOSE. WIPE OFF WITH (70021 REDUCER/THINNER, WEST MARINE MODEL 329591 REDUCER/THINNER, 551 DEWAXER, INTERLUX FIBERGLASS SOLVENT, WASH 202). DO NOT SAND. FILL IN ANY PERFECTIONS WITH FILLING COMPOUND. SAND SMOOTH AND WIPE CLEAN. APPLY 3 COATS OF (3037 RED OXIDE PRIMER OR 3039 ZINC CHROMATE PRIMER, HIGH QUALITY MARINE RED OXIDE PRIMER OR HIGH QUALITY MARINE ZINC CHROMATE PRIMER, 408 RED LEAD PRIMER OR B304-2 PART RED EPOXY PRIMER, INTERLUX INTERPROTECT 2000E). FOLLOWED BY 3 COATS OF ANTI-FOULANT.

Interlux

INTERNATIONAL PAINT INC.

2270 MORRIS AVENUE • UNION, NJ 07083 • 800-628-8422

ACCEPTED

AUG 04 2003

Under the Federal Insecticide, Fungicide, and Rodenticide Act as amended, for the pesticide, registered under EPA Reg. No. 23566-20