

TOWER BIOCIDES

ACTIVE INGREDIENT

Potassium dimethylidithiocarbamate 51.07

INERT INGREDIENTS

This product contains .52 lb. of active ingredient per gallon and weighs 10.4 lb. per gallon.

KEEP OUT OF REACH OF CHILDREN
DANGER

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS AND DOMESTIC ANIMALS

DANGER: Corrosive. Causes eye and skin damage. Harmful if swallowed. Do not get in eyes, on skin, or on clothing. Avoid contamination of food. Wear goggles or face shield and other clean steel banding. Wash thoroughly after handling.

STATEMENT OF PRACTICAL TREATMENT *In case of skin contact, wash away with soap and water. Remove contaminated clothing and wet clothes before removing them in the eyes, flush immediately with copious amounts of clean cold water for at least 15 minutes, and then continue to flush until the eyes are completely free from the irritant. If irritation continues, consult a physician or Poison Control Center immediately.*

Note to physician: Preventable nosocomial damage to joints can be prevented by

ENVIRONMENTAL HAZARDS. The particular system of land-use planning and/or environmental control, the rate of discharge of wastes into the environment, and the like, streams, rivers, lakes, oceans, etc., water resources, etc., may all readily affect the life expectancy of a MPP. Conversely, the life expectancy of the population may affect the system of land-use planning and/or environmental control, as well as the rate of discharge of wastes into the environment, etc.

Manufactured by
THE MARSHAL CO.,
ST. LOUIS, MO.

{PAGE, NO}

EPICURE


NET CONTENTS:

Digitized by srujanika@gmail.com

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

TOWER BIOCIDE is used in industrial and/or commercial recirculating cooling tower systems and industrial air washing systems to control microbiological slime. Prior to the use of TOWER BIOCIDE in industrial and/or commercial recirculating cooling tower systems, systems should be cleaned to remove algal growth, microbiological slime, and other deposits. Then make an initial slug addition of 2.0 to 3.0 fl oz of TOWER BIOCIDE per 1000 gal of water to provide 20 to 30 ppm of TOWER BIOCIDE, based on total weight of water in the system. Repeat initial dosage until control is evident. Make subsequent slug addition of 1.0 to 3.0 fl oz of TOWER BIOCIDE per 1000 gal of water (10 to 30 ppm TOWER BIOCIDE) every 2 to 5 days or as needed. The frequency of addition depends upon the relative amount of bleedoff and the severity of the microbiological problem. Slug additions should be made in the sump of recirculating cooling tower systems.

TOWER BIOCIDE is used in industrial air washing systems which maintain effective mist eliminating components. Prior to its use, systems should be cleaned to remove bacterial slimes and other deposits. An initial slug dose of 1% to 1.5% (1 oz. or **TOWER BIOCIDE** per 1000 gal. of water) is recommended. Repeat initial dosage until control is evident. Subsequent slug additions of 1.5% to 6.0% (1 oz. of **TOWER BIOCIDE** per 1000 gallons of water) should be employed every 1 to 5 days, or as needed. The frequency of addition depends upon the relative amount of bleedoff and severity of the bacterial problem. Slug additions may be made to the sump or the water collection trays of the airwash system.

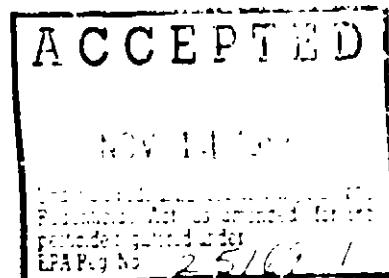

STRUCTURE AND DISCUSSION

Figure 1. A schematic diagram of the experimental setup.

10. The following table summarizes the estimated time required for the various stages of setting up a banked
project. The estimated time required for each stage should be allocated in advance, as soon as the project
is finalized. The estimated time required for each stage should be allocated in advance, as soon as the project
is finalized.

CONTINUATION

PLATINUM: The most recognizable! These offer the most bang for the buck among the high-end headphones. They have the best sound quality, the most comfortable fit, the longest battery life, the easiest controls, and the best build quality.