


WARCO ALGAECIDE-60
MANUFACTURED BY WARREN COOK CHEMICALS, INC.
OAK & ASTOR STS. MONEE, ILLINOIS 60449

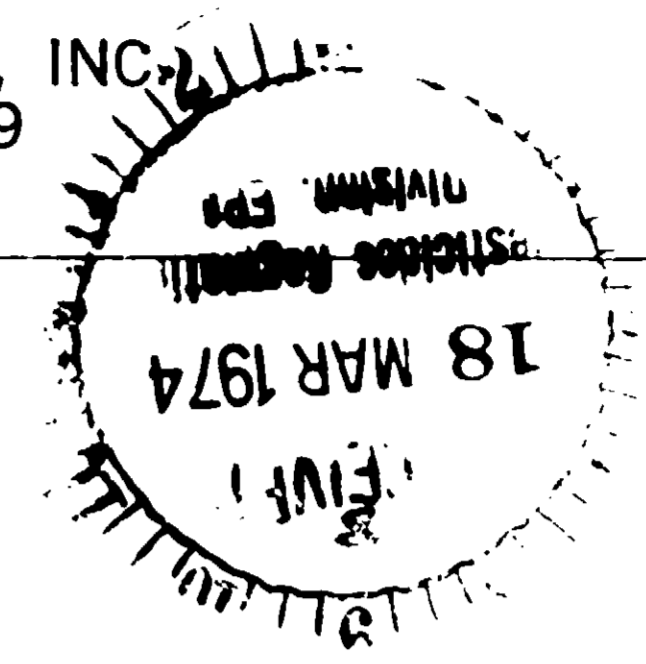

COMPOSITION

	Percent by weight	
Active ingredient.....	60.0 percent	
Poly (oxyethylene (dimethyliminio) ethylene (dimethyliminio)- ethylene dichloride)		60 percent
Inert ingredient	40 percent	
Weight per gallon.....	9.6 pounds	
Weight of active ingredient per gallon	7.56 pounds	

CAUTION

KEEP OUT OF REACH OF CHILDREN

Harmful if swallowed. Avoid contact with skin and eyes. In case of contact flush with plenty of water for at least 15 minutes. If eye irritation persists get medical attention. Avoid contamination of food.

This product is toxic to fish. Treated effluent should not be discharged where it will drain into lakes, streams, ponds or public water. Do not contaminate water by cleaning of equipment or disposal of waste. Use only as directed on label. Do not reuse container. Destroy when empty.

APPLICATION

WARCO ALGAECIDE-60 is used to control algae, bacteria, and fungi in recirculating commercial and industrial water cooling towers. Prior to its use, systems must be cleaned to remove algal growth, microbiological slime and other deposits. An initial slug addition of 0.9 to 2.2 fluid ounces of WARCO ALGAECIDE-60 per 1000 gallons of water to provide a concentration of 8 to 20 parts per million of WARCO ALGAECIDE-60 based on the total weight of water in the system is recommended. Repeat initial dosage until control is evident. Subsequent slug additions of 0.2 to 2.2 fluid ounces of WARCO ALGAECIDE-60 per 1000 gallons of water (2 to 20 parts per million of WARCO ALGAECIDE-60) should be employed every 2 to 5 days or as needed. The frequency of addition depends upon the relative amount of bleedoff and the severity of the microbiological problem. Slug additions should be made in the pump of water cooling towers.

EPA Reg. No. 26488.